

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0190730194**
Status: **Active**
Description: Avikrimp™ Ring Tongue Terminal for 10 to 12 AWG Wire, Stud Size 1/4", Expanded Flare, Length 31.95mm (1.258"), Mylar Tape Carrier

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E32244

General

Product Family Ring and Spade Terminals
 Series [19073](#)
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Product Name Avikrimp™
 Type Ring

Physical


Barrel Type Closed
 Flammability 94V-0
 Insulation Nylon (PA)
 Material - Plating Mating Tin
 Packaging Type Adhesive Tape on Reel
 Stud Size 1/4" (M6)
 Wire Insulation Diameter 6.35mm (.250") max
 Wire Size AWG 10, 12
 Wire Size mm² 4.00 - 6.00

Material Info

Old Part Number C-830-14XT

Reference - Drawing Numbers

Sales Drawing CCD80105

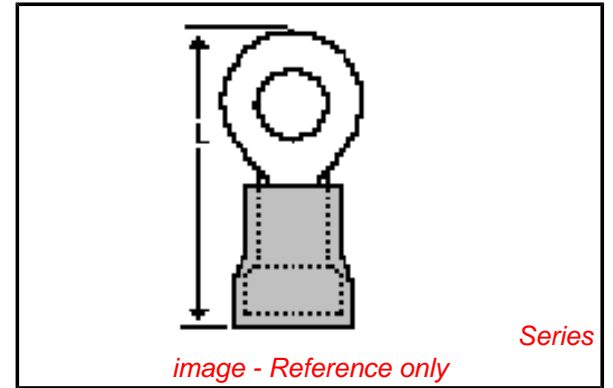

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[19073Series](#)

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global


Description	Product #
Crimp Dies for MTA-100 Tape Applicator used in 3BF Press, MTA-105 Tape Applicator used in TM-2000™ Press, and ATP-301 Air Crimping Press for Mylar Tape Mounted Terminals	0192880179
Mini-Mac™ Applicator	0638851500

This document was generated on 05/20/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$)
 - ② PLATING: ELECTRO TIN (.0003 MIN) TIN-PLATED BRASS NON-FUNNEL FERRULE
 - ③ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ($\pm .005$)
- | | |
|------------|-----------|
| 02 = .094 | 413 = 413 |
| 04 = .119 | 76 = 453 |
| 06 = .146 | 12 = 515 |
| 08 = .173 | |
| 10 = .198 | |
| 14 = .265 | |
| 56 = .328 | |
| 38 = .390 | |
| 209 = .209 | |
- ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$
- "UL" LISTING #E32244
 "CSA" LISTING #18689
- WIRE SIZE: 12 - 10 AWG²
 4.0 - 6.0 MM²

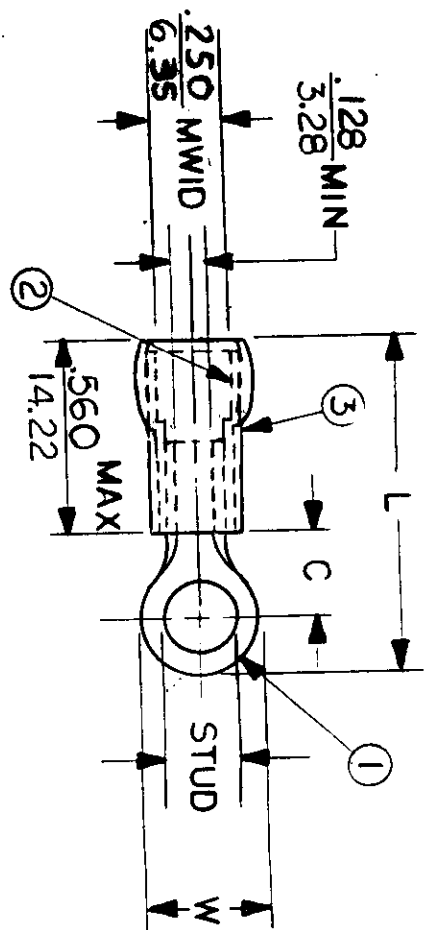

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W"	"C"	"L"	SCALE:	DATE	TITLE:	DWG. NO.	CUSTOMER DWG.
C-801-	$\frac{.750}{19.05}$	$\frac{.611}{15.51}$	$\frac{1.580}{40.13}$	NTS	9-22-87	RING TONGUE TERMINAL AVIKRIMP 800-SERIES	A	
C-828-	$\frac{.375}{9.53}$	$\frac{.303}{7.70}$	$\frac{1.091}{27.71}$					
C-830-	$\frac{.530}{13.46}$	$\frac{.393}{9.98}$	$\frac{1.258}{31.95}$					
C-836-	$\frac{.282}{7.16}$	$\frac{.306}{7.77}$	$\frac{1.047}{26.59}$					
C-840-	$\frac{.592}{15.04}$	$\frac{.466}{11.83}$	$\frac{1.362}{34.59}$					

AVAILABLE STUD SIZES:
 14X, 56X, 38X, 76X, 12X
 04X, 06X, 08X, 10X, 209X
 10X, 14X, 56X, 38X
 04X, 06X, 08X
 10X, 14X, 56X, 38X
 209X, 413X

INCORPORATED