


## EPA2465




- Used in Crystal Semiconductor's CS61581 Chip
- 1500 Vrms Isolation
- Thru Hole Package


### Electrical Parameters @ 25° C

Primary Inductance (mH Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance ( $\mu$ H Max.)	Turns Ratio ( $\pm$ 5%)	DCR ( $\Omega$ Max.)	
				Pri.	Sec.
@ 100 KHz, 20 mVrms	@ 100 KHz, 20 mVrms	@ 100 KHz, 20 mVrms	Pri.:Sec.	Pri.	Sec.
1.5	35	0.60	1:1.15CT	0.70	0.90

### Schematic



### Package

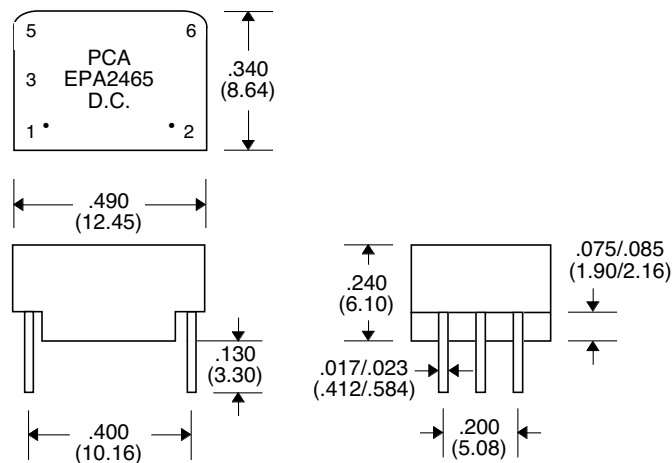

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm$  .010 / .25