


Power Divider

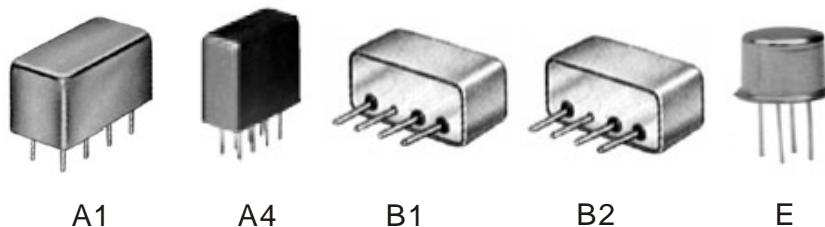

Plug-in

2-way 0° 0.005 to 2000MHz

P/N	Freq. Range (MHz) f _L -f _U	Insertion Loss (dB)			Isolation (dB)			VSWR		Unbalance		Case
		L	M	U	L	M	U	Max		Phase (°)	Amp. (dB)	
		Typ/Max	Typ/Max	Typ/Max	Typ/Min	Typ/Min	Typ/Min	In	Out	Max	Max	
JXWBGF-A-2-0.1-400	0.1-400	0.2/0.6	0.4/0.7	0.6/1.0	20/15	25/20	25/20			4	0.3	A1
JXWBGF-A-2-1-600	1-600	0.3/0.6	0.5/0.9	0.7/1.0	25/20	30/20	25/20			4	0.3	A1
JXWBGF-A-2-0.005-60	0.005-60	0.3/0.6	0.3/0.6	0.6/1.0	25/20	25/20	25/20			4	0.3	A1
JXWBGF-A-2-10-1000	10-1000	0.6/1.0	0.6/1.0	0.7/1.2	25/20	25/20	25/20			8	0.4	A1
JXWBGF-A-2-10-1400	10-1400	0.3/0.6	0.6/1.0	0.9/1.6	18	17	17			8	0.4	A1
JXWBGF-A-2-10-2000	10-2000	0.6/0.8	0.6/0.8	1.0/1.2	18/16	20/16	18/15			5	0.5	A1
JXWBGF-A-2-0.1-450	0.1-450	0.3/0.5	0.4/0.75	0.6/1.0	20/15	30/20	30/20			4	0.3	A4
JXWBGF-A-2-2-650	2-650	0.3/0.5	0.6/0.8	0.8/1.2	20/18	30/20	22/20			4	0.3	A4
JXWBGF-A-2-5-2000	5-2000	0.6/0.8	0.6/0.8	1.0/1.2	18/15	18/15	18/15			5	0.4	A4
JXWBGF-B-2-1-400	1-400	0.3/0.6	0.3/0.7	0.8/1.0	30/25	30/25	25/20			4	0.6	B2
JXWBGF-B-2-0.1-450	0.1-450	0.3/0.6	0.4/0.7	0.6/1.0	20	20	20			4	0.5	B2
JXWBGF-B-2-0.01-100	0.01-100	0.3/0.6	0.3/0.7	0.8/1.0	25/20	25/20	20/18			4	0.4	B1
JXWBGF-E-2-0.5-600	0.5-600	0.2/0.4	0.3/0.4	0.7/1.0	25/20	25/20	25/20			6	0.5	E
JXWBGF-E-2-10-1000	10-1000	0.4-0.8	0.6/1.0	0.7/1.2	25/20	25/20	20/18			6	0.5	E

Notes:

- Operating Temperature : -40 °C to +80 °C. Storage Temperature : -55 °C to +85 °C.
- L=low range [f_L to 10 f_L] M=mid range [10 f_L to f_U/2] U=upper range[f_U/2 to f_U]
- Customer Designs Available