


## Low Noise Amplifier

P/N: JXWBLA-T-10-500-29-S16

Frequency Range(MHz)	10-500
Gain(dB)	29 Typ.
Pout@1dB(dBm)	10 min
Noise Figure(dB)	2.5 Typ.
Input VSWR	2.5:1 Typ.
Output VSWR	2.5:1 Typ.
Power Supply(V)	+9 or +12
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +70
Storage Temperature(°C)	-55 ~ +80

### Outline Drawing (Size: mm)

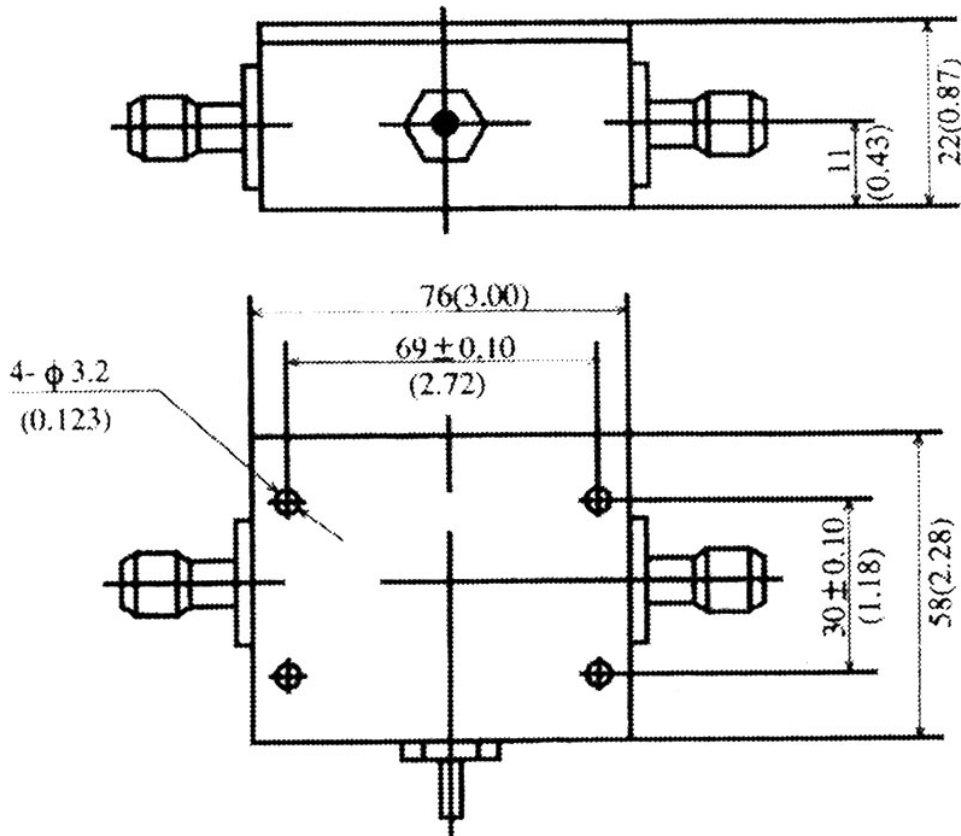

For current data sheets, please contact: [sales@aacix.com](mailto:sales@aacix.com)