



1. Dimensions:

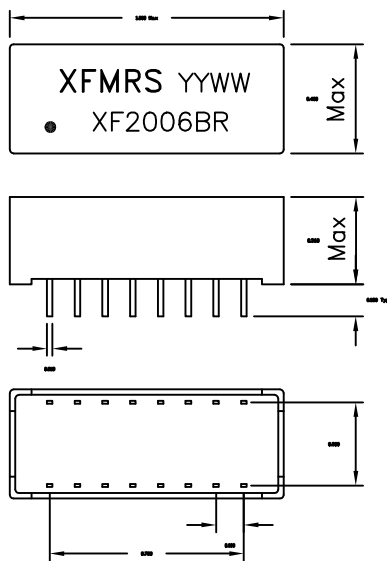

2. Schematic:

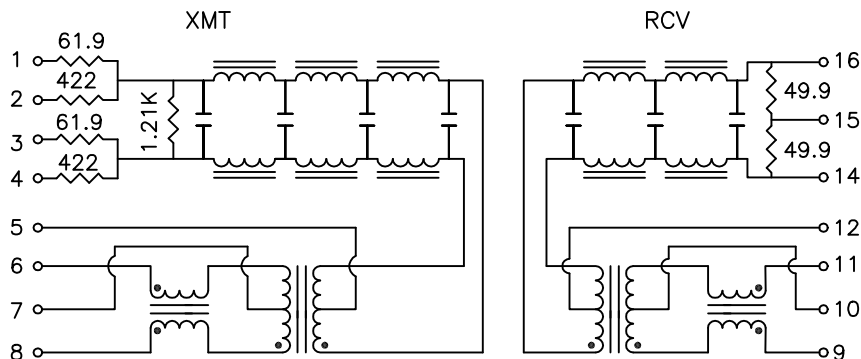

3. Electrical Specifications: @25°C

Dielectric Withstanding Voltage: 1500VAC

*Insertion Loss (1-10MHz): -1.0dB Maximum

Return Loss (1-10MHz): -15dB Minimum

Cross Talk (1-10MHz): -35dB Minimum

*Attenuation @30MHz

Transmit -30dB Minimum

Receive -20dB Minimum

Cut off Frequency: 17MHz Typical

Turns Ratio: 1CT:1CT (XMT & RCV)

Nominal Input Impedance: 200 ohms (XMT)

Nominal Input Impedance: 100 ohms (RCV)

*Excluding the losses due to resistors

XFMS Inc. UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 1.5:1 SHT 1 OF 1	Title: 10 BASE - T FILTER	
	P/N: XF2006BR	REV. A
	DWN. 李小锋	May-31-02
	CHK. 廖玉坤	May-31-02
	APP. Joe Huff	May-31-02