



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2N7002T

N-Channel Plastic-Encapsulate Transistor

Features

- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Low ON-Resistance and low Input Capacitance
- Low Gate Threshold Voltage
- Fast Switching Speed
- Low Input/Output Leakage
- Ultra-Small Surface Mount Package
- Available in Lead Free/RoHS Compliant Version
- Case Material:Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:K72

Mechanical Data

- Case: SOT-523, Molded Plastic
- Terminal Connections: See Diagram



Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

Parameter	Symbol	Value	Unit
Drain-Source-Voltage	V_{DSS}	60	V
Drain-Gate Voltage $R_{GS} \leq 1.0M\Omega$	V_{DGR}	60	V
Gate-Source-Voltage Continuous Pulsed	V_{GSS}	± 20 ± 40	V
Drain Current (Note 1) Continuous Continuous @ 100°C Pulsed	I_D	115 73 800	mA
Total Power Dissipation (Note 1)	P_D	150	mW

Note: 1. Valid provided that terminals are kept at specified ambient temperature.

SOT-523

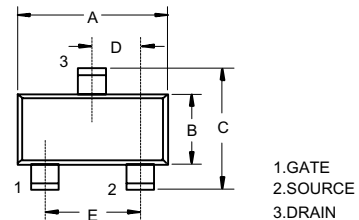

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.059	.067	1.50	1.70	
B	.030	.033	0.75	0.85	
C	.057	.069	1.45	1.75	
D	.020 Nominal		0.50Nominal		
E	.035	.043	0.90	1.10	
G	.000	.004	.000	.100	
H	.028	.031	.70	0.80	
J	.004	.008	.100	.200	
K	.010	.014	.25	.35	

2N7002T









Micro Commercial Components

Electrical Characteristics @ T_A = 25 C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 2)						
Drain-Source Breakdown Voltage	BV _{DSS}	60			V	V _{GS} = 0V, I _D = 10 μ A
Zero Gate Voltage Drain Current	I _{DSS}			1.0 500	μ A	V _{DS} = 60V, V _{GS} = 0V @ T _C = 25°C @ T _C = 125°C
Gate-Body Leakage	I _{GSS}			\pm 10	nA	V _{GS} = \pm 20V, V _{DS} = 0V
ON CHARACTERISTICS (Note 2)						
Gate Threshold Voltage	V _{GS(th)}	1.0		2.0	V	V _{DS} = V _{GS} , I _D = 250 μ A
Static Drain-Source On-Resistance	R _{DS(ON)}		2.0 4.4	7.5 13.5	Ω	V _{GS} = 5.0V, I _D = 0.05A V _{GS} = 10V, I _D = 0.5A
On-State Drain Current	I _{D(ON)}	0.5	1.0		A	V _{GS} = 10V, V _{DS} = 7.5V
Forward Transconductance	g _{FS}	80			mS	V _{DS} = 10V, I _D = 0.2A
DYNAMIC CHARACTERISTICS						
Input Capacitance	C _{iss}		22	50	pF	V _{DS} = 25V, V _{GS} = 0V f = 1.0MHz
Output Capacitance	C _{oss}		11	25	pF	
Reverse Transfer Capacitance	C _{rss}		2.0	5.0	pF	
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{D(ON)}		7.0	20	ns	V _{DD} = 30V, I _D = 0.2A, R _L = 150 ohm, V _{GEN} = 10V, R _{GEN} = 25 ohm
Turn-Off Delay Time	t _{D(OFF)}		11	20	ns	

Note: 2. Short duration test pulse used to minimize self-heating effect.

2N7002T

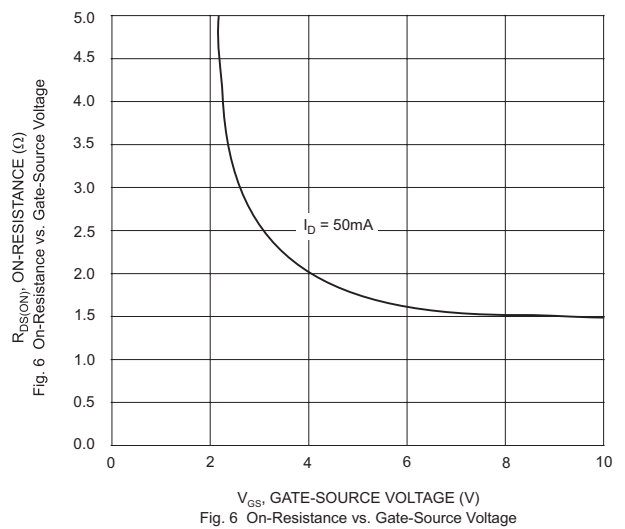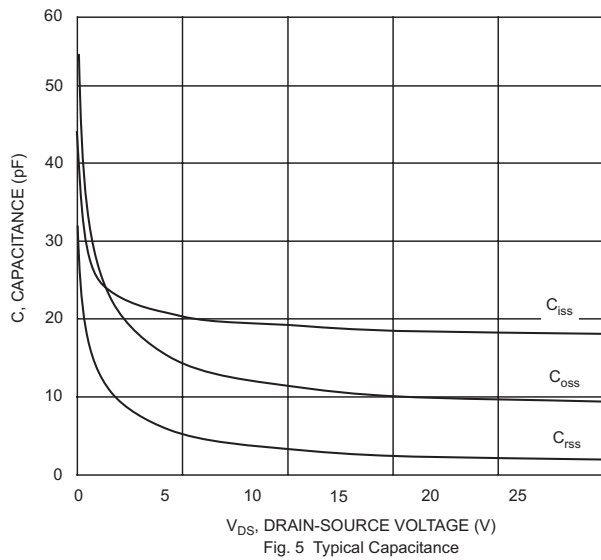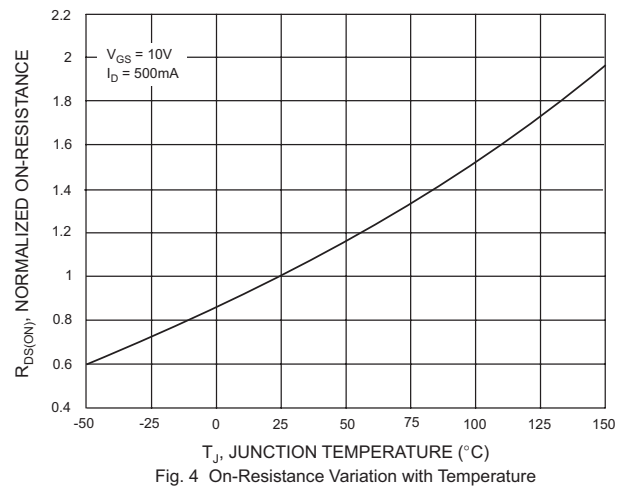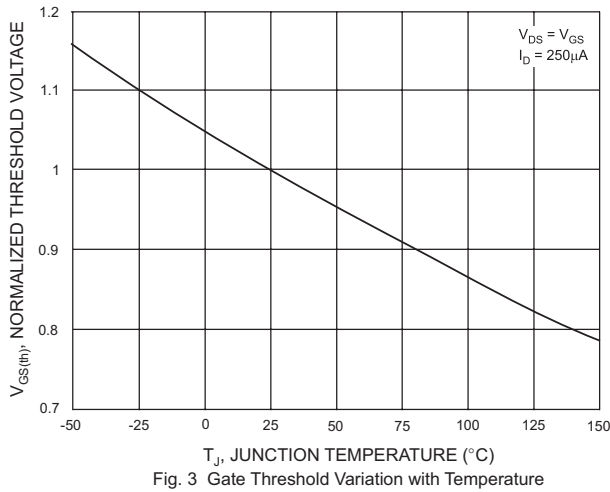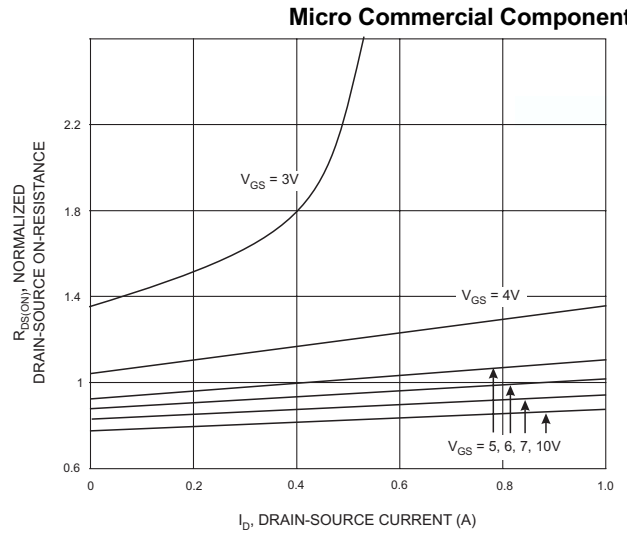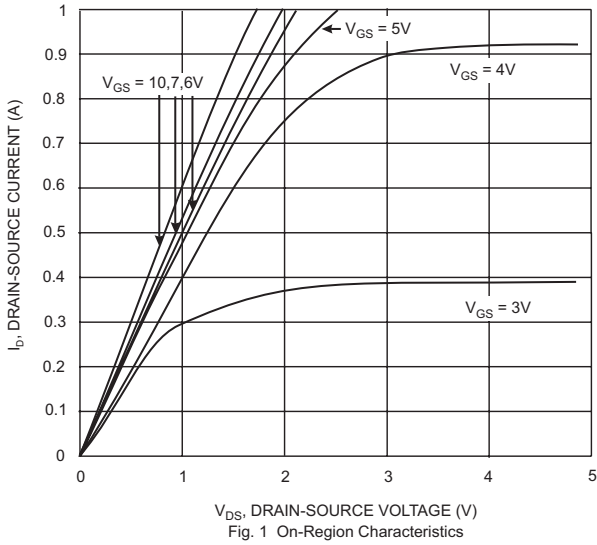



Micro Commercial Components

Ordering Information

Device (Part Number)-TP	Packing Tape&Reel;3Kpcs/Reel
----------------------------	---------------------------------

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com