


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

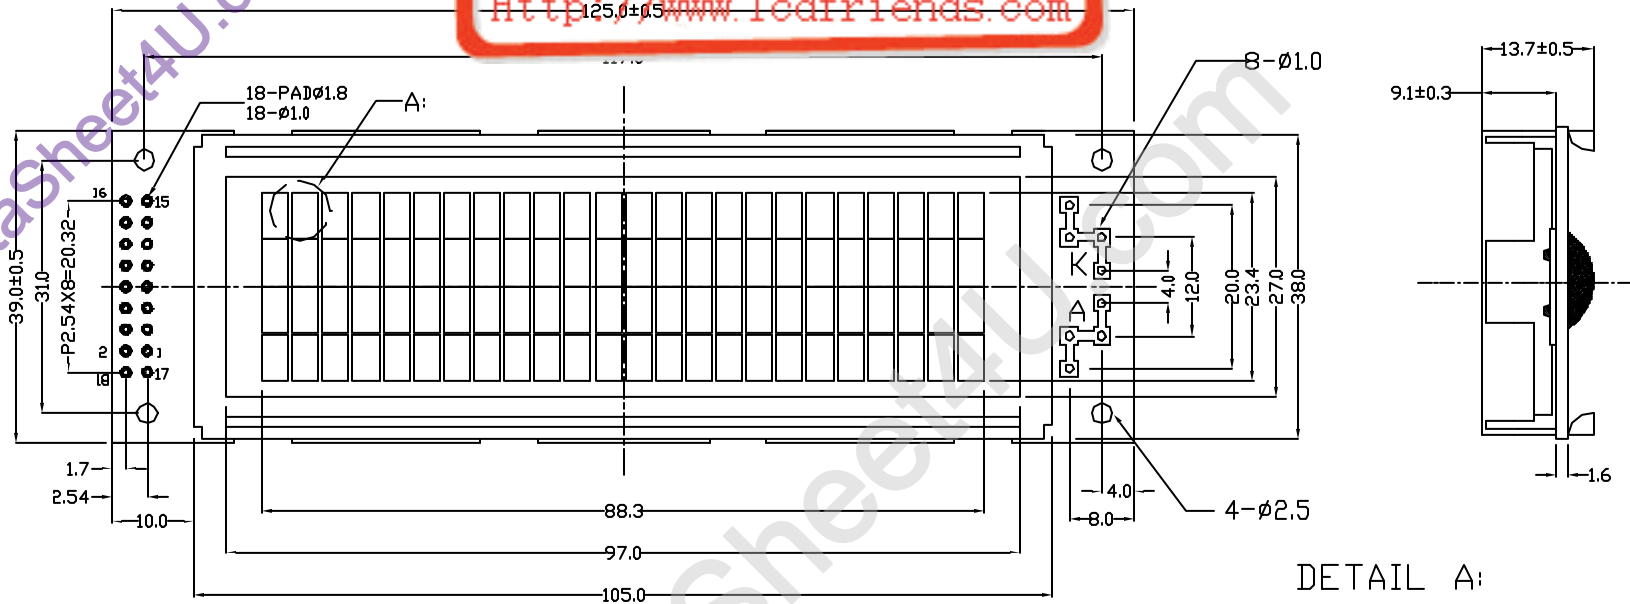

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Vss	Vdd	Vci	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K	Vout	NC

NOTES:

1. DISPLAY TYPE: TN, STN, or FSTN
2. VIEWING DIRECTION: 6:00 or 12:00
3. POLARIZER MODE: REFLECTIVE or TRANFLECTIVE
4. OPERATING TEMP: NORMAL or WIDE
5. STORAGE TEMP: NORMAL or WIDE
6. BACKLIGHT TYPE: none or LED(thickness depicted)
7. DRIVER METHOD: 1/33 DUTY 1/6 BIAS
8. IC: S6A0079X01-COCX
9. BUILD IN DC-DC: Vci (1.0~4.5)V
10. LCD OPERATING VOLTAGE: 7.0V VDD=5.0V
11. BEZEL IS TO BE PAINTED BLACK
12. ALL UNMARKED TOLERANCE: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China.

DRAWN BY:	TITLE: TM244B	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM244B G-1	UNITS: mm
CONFIRMED BY:	SHEET NO: 01	OF