
# Tactile Switches With Button SOF Series

**Switches** 

#### FEATURES


- 1. Minimized mounting area.
- 2. Using the stainless steel metal dome with long life and sharp feeling.
- 3. Suitable for mounting a narrow key pitch.
- 4. Suitable for SMT reflow soldering.

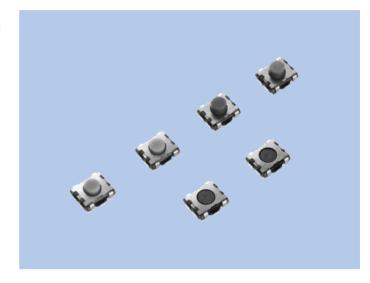

## APPLICATIONS

1. For small electronic equipment.

#### MODEL NAME CODE

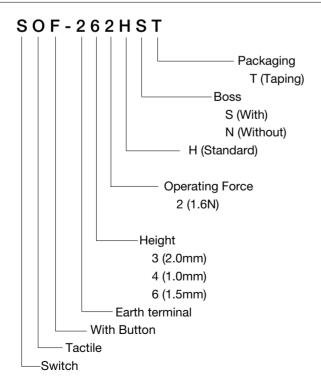


## SPECIFICATIONS

	Rating	50mA, 12V DC
Electrical	Contact Resistance	$1\Omega$ or less
Characteristics	Insulation Resistance	$10 \mathrm{M}\Omega$ or more
	Withstand Voltage	1 minute at 100V
Mechanical Characteristics	Operating Force	1.6N
	Life	100,000cycles

# TYPE

Model Name Code	Order Number	Operating Force	Boss	Mounting Height (h)	Pcs
SOF-242HST	R66 7074	1.6N	With	1.0mm	5,000
SOF-242HNT	R66 7075	1.6N	Without	1.0mm	5,000
SOF-262HST	R66 7076	1.6N	With	1.5mm	5,000
SOF-262HNT	R66 7077	1.6N	Without	1.5mm	5,000
SOF-232HST	R66 7078	1.6N	With	2.0mm	4,000
SOF-232HNT	R66 7079	1.6N	Without	2.0mm	4,000

## DIMENSIONS

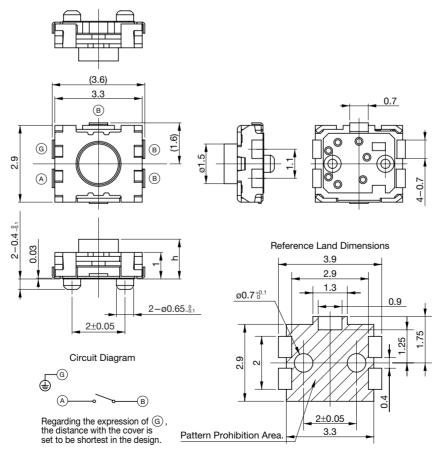

Metal Mask thickness:100μm

☆Tolerance: ±0.3mm