



# CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505


PHONE (630) 851-4722

FAX (630) 851-5040

## ACMOS ENABLE/DISABLE TRISTATE OUTPUT

SPECIFICATIONS	AC61R	AC62R	AC63R	AC64R	
Frequency Range	13MHz to 135MHz				
Frequency Stability	±25ppm	±50ppm	±100ppm	±20ppm	
	(Inclusive of calibration tolerance at 25°C and operating temperature range)				
Temperature Range	-40°C to +85°C				
Output	Waveform	CMOS Squarewave, TTL Compatible			
	Load	50pF			
	Voltage	Voh	4.4V Minimum		
		Vol	0.44V Maximum		
	Current	Ioh	-24mA		
		Iol	24mA Maximum		
	Duty Cycle	45/55 Maximum Measured at 2.5V			
	Rise/Fall Time	2nS Maximum			
Input	Output E/D Time	100nS Maximum			
	Enable (Vih)	2.0V Minimum			
	Disable (Vil)	0.8V Maximum			
	Oscillator output is enabled with no connection on pin 1				
Start Up Time	10mS Maximum				
Supply Voltage	+5Vdc ±5%				
Supply Current	150mA Maximum				
Package	All metal, hermetically sealed, welded package				

**WARNING!** Do not insert oscillator into a hot circuit. Failure to comply will result in damage to oscillator.

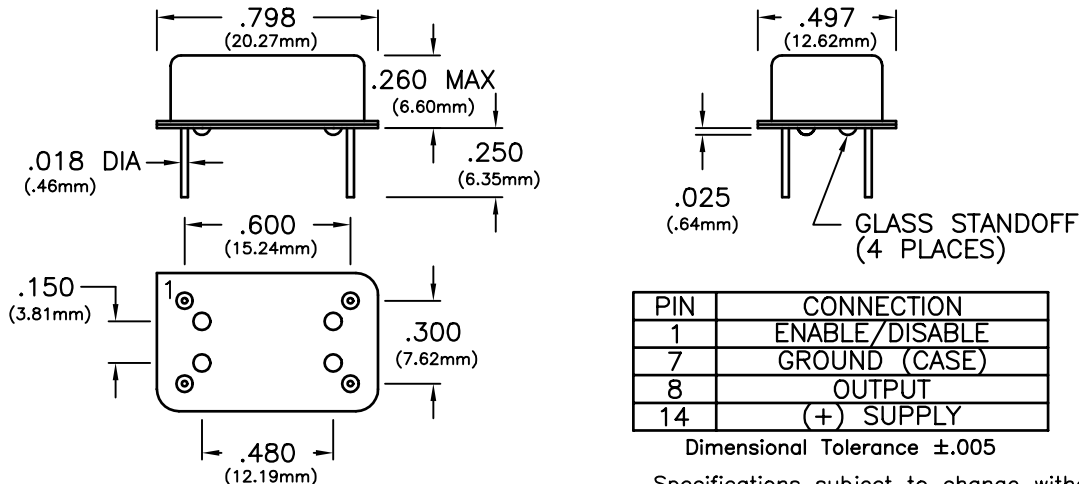

BULLETIN #: AC088  
PAGE 1 OF 1

REV: 00  
DATE: 4/20/95

ISSUED BY: \_\_\_\_\_