


Subminiature, Leaded Solid Tantalum Capacitors

Polar or Non-polar



FEATURES

- Subminiature package size and light weight
- Rectangular case with axial or radial leads
- 2 to 35 VDC
- 0.0022 μ F to 470 μ F
- Operating temperature range : - 55°C to + 125°C
- High stability and reliability
- Tested in accordance with MIL-PRF-49137
- Unique and comprehensive custom design capability

ELECTRICAL CHARACTERISTICS

Operating temperature range: - 55°C to + 125°C

Capacitance: Measured at 120 Hz and 25°C with a maximum of 2.2 VDC bias and 1.0 volt rms signal.

Capacitance Tolerance: Standard tolerance is $\pm 20\%$ for ratings 0.1 μ F and above, and + 40, - 20% for ratings below 0.1 μ F. Special tolerances are also available.

Dissipation Factor: When measured simultaneously with capacitance, DF shall not exceed the value shown in the ratings tables.

DC Leakage Current (DCL Max):

When measured with DC voltage applied through a 1,000 Ω resistor for 5 minutes, DC leakage (μ A) shall not exceed:

At @ 25°C: Leakage current shall not exceed the values listed in the Standard Ratings Tables

At @ 85°C: Leakage current shall not exceed 10 times the values listed in the Standard Ratings Tables

At @ 125°C and 66% of rated voltage: Leakage current shall not exceed 15 times the values listed in the Standard Ratings Tables.

Operating Voltage: Full working voltage up to 85°C. From 85°C to 125°C working voltage derates linearly to 66% of the 85°C working voltage.

APPLICATIONS

- Hearing aids
- Portable communications
- Space/avionics
- Laptop computers.

MECHANICAL SPECIFICATIONS

Solder coated nickel leads (type N32 per MIL-STD-1276) are standard on all case sizes.

Leads are weldable and/or solderable.

Special leads are available on request (e.g. bare nickle, gold plated nickle or ribbon leads).

Lead length is 1 1/2" [38.1 mm] minimum on nonpolar parts.

On polar parts the negative lead is 1-1/4" [31.8mm] minimum and the positive lead is 1-1/2" [38.1mm] minimum.

ORDERING INFORMATION


STC MODEL	1.0 CAPACITANCE IN μ F	35 DC VOLTAGE RATING AT + 85°C	C7 CASE CODE	A* LEAD CONFIGURATION	M CAPACITANCE TOLERANCE
			C = Polar N = Nonpolar	A = Axial R = Radial	E = +40, -20% M = $\pm 20\%$ K = $\pm 10\%$ J = $\pm 5\%$

Example of Part Number Code: TC1.0-35C7AM

* To complete part number in rating tables, add A or R.
Change suffix if special capacitance tolerance is required.


DIMENSIONS in inches [millimeters]

POLAR STYLE

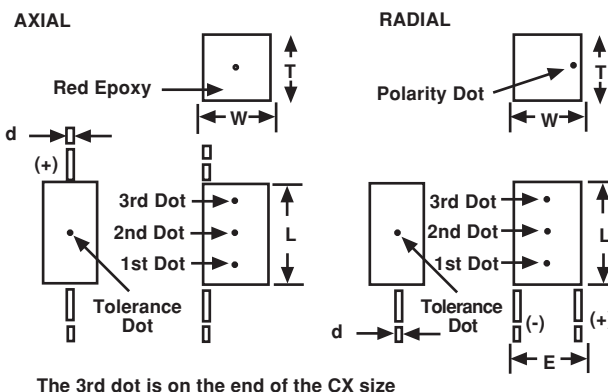

CASE CODE	L MAX	W MAX	T MAX	E	E TOL ±	d
CX	0.075 [1.91]	0.050 [1.27]	0.040 [1.02]	0.030 [0.76]	0.015 [0.38]	0.007 [0.18]
C0	0.100 [2.54]	0.050 [1.27]	0.040 [1.02]	0.030 [0.76]	0.015 [0.38]	0.007 [0.18]
C1	0.125 [3.18]	0.070 [1.78]	0.040 [1.02]	0.050 [1.27]	0.015 [0.38]	0.010 [0.25]
C2	0.165 [4.19]	0.120 [3.05]	0.070 [1.78]	0.100 [2.54]	0.020 [0.51]	0.010 [0.25]
C3	0.225 [5.72]	0.185 [4.70]	0.075 [1.91]	0.150 [3.81]	0.020 [0.51]	0.010 [0.25]
C4	0.290 [7.37]	0.220 [5.59]	0.110 [2.79]	0.180 [4.57]	0.025 [0.64]	0.016 [0.41]
C5	0.310 [7.87]	0.230 [5.84]	0.130 [3.30]	0.200 [5.08]	0.025 [0.64]	0.016 [0.41]
C6	0.475 [12.07]	0.375 [9.53]	0.150 [3.81]	0.300 [7.62]	0.025 [0.64]	0.016 [0.41]

NON POLAR STYLE

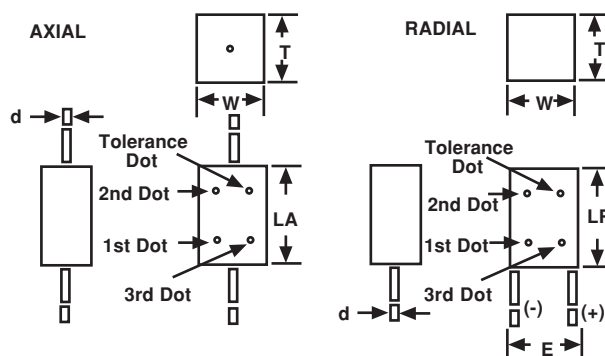

CASE LA	LR MAX	W MAX	T MAX	E MAX	E TOL ±	d	CODE
N1	0.220 [5.59]	0.180 [4.57]	0.125 [3.18]	0.125 [3.18]	0.100 [2.54]	0.020 [0.51]	0.010 [0.25]
N2	0.280 [7.11]	0.240 [6.10]	0.140 [3.56]	0.180 [4.57]	0.100 [2.54]	0.025 [0.64]	0.010 [0.25]
N3	0.370 [9.40]	0.315 [8.00]	0.180 [4.57]	0.220 [5.59]	0.150 [3.81]	0.025 [0.64]	0.016 [0.41]
N4	0.390 [9.91]	0.335 [8.51]	0.230 [5.84]	0.230 [5.84]	0.180 [4.57]	0.025 [0.64]	0.016 [0.41]



Subminiature, Leaded Solid Tantalum Capacitors
Polar or Non-polar

Vishay Sprague

STANDARD RATINGS - POLAR CAPACITORS				
CAPACITANCE (μF)	MAX DF (%)	MAX. DCL @ + 25°C (μA)	CASE CODE	PART NUMBER
2 WVDC @ + 85°C				
0.0022	10	0.5	CX	STC.0022-2CX*E
0.0033	10	0.5	CX	STC.0033-2CX*E
0.0047	10	0.5	CX	STC.0047-2CX*E
0.0068	10	0.5	CX	STC.0068-2CX*E
0.010	10	0.5	CX	STC.010-2CX*E
0.015	10	0.5	CX	STC.015-2CX*E
0.022	10	0.5	CX	STC.022-2CX*E
0.033	10	0.5	CX	STC.033-2CX*E
0.047	10	0.5	CX	STC.047-2CX*M
0.10	10	0.5	CX	STC.10-2CX*M
0.15	10	0.5	CX	STC.15-2CX*M
0.22	10	0.5	CX	STC.22-2CX*M
0.33	10	0.5	CX	STC.33-2CX*M
0.47	10	0.5	CX	STC.47-2CX*M
0.68	10	0.5	CX	STC.68-2CX*M
1.0	10	0.5	CX	STC1.0-2CX*M
1.5	10	0.5	CX	STC1.5-2CX*M
2.2	10	0.5	CX	STC2.2-2CX*M
2.2	10	0.5	C0	STC2.2-2C0*M
6.8	10	0.5	C1	STC6.8-2C1*M
100	10	2.0	C3	STC100-2C3*M
3 WVDC @ + 85°C				
1.5	10	0.5	C0	STC1.5-3C0*M
22	10	1.0	C2	STC22-3C2*M
68	10	2.0	C3	STC68-3C3*M
100	10	3.0	C4	STC100-3C4*M
4 WVDC @ + 85°C				
1.0	10	0.5	C0	STC1.0-4C0*M
4.7	10	0.5	C1	STC4.7-4C1*M
10	8	1.0	C2	STC10-4C2*M
15	8	1.0	C2	STC15-4C2*M
47	8	2.0	C3	STC47-4C3*M
68	8	3.0	C4	STC68-4C4*M
220	15	9.0	C5	STC220-4C5*M
470	15	10.0	C6	STC470-4C6*M
6 WVDC @ + 85°C				
0.68	10	0.5	C0	STC.68-6C0*M
3.3	8	0.5	C1	STC3.3-6C1*M
33	6	2.0	C3	STC33-6C3*M
47	6	3.0	C4	STC47-6C4*M
150	10	9.0	C5	STC150-6C5*M
330	15	10.0	C6	STC330-6C6*M

*Add A for axial, R for radial

STANDARD RATINGS - POLAR CAPACITORS

CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ A)	CASE CODE	PART NUMBER
10 WVDC @ + 85°C				
0.47	10	0.5	C0	STC.47-10C0*M
1.5	6	0.5	C1	STC1.5-10C1*M
2.2	6	0.5	C1	STC2.2-10C1*M
6.8	6	1.0	C2	STC6.8-10C2*M
22	6	2.0	C3	STC22-10C3*M
33	6	3.0	C4	STC33-10C4*M
100	8	9.0	C5	STC100-10C5*M
220	6	0.5	C6	STC220-10C6*M
15 WVDC @ + 85°C				
1.0	6	0.5	C1	STC1.0-15C1*M
4.7	6	1.0	C2	STC4.7-15C2*M
15	6	2.0	C3	STC15-15C3*M
22	6	3.0	C4	STC22-15C4*M
68	6	6.0	C5	STC68-15C5*M
150	10	10.0	C6	STC150-15C6*M
20 WVDC @ + 85°C				
0.68	6	0.5	C1	STC.68-20C1*M
3.3	6	1.0	C2	STC3.3-20C2*M
6.8	6	2.0	C3	STC6.8-20C3*M
10	6	2.0	C3	STC10-20C3*M
15	6	3.0	C4	STC15-20C4*M
47	6	6.0	C5	STC47-20C5*M
100	10	10.0	C6	STC100-20C6*M
25 WVDC @ + 85°C				
0.47	6	0.5	C1	STC.47-25C1*M
2.2	6	1.0	C2	STC2.2-25C2*M
3.3	6	2.0	C3	STC3.3-25C3*M
4.7	6	2.0	C3	STC4.7-25C3*M
10	6	3.0	C4	STC10-25C4*M
15	6	6.0	C5	STC15-25C5*M
22	6	6.0	C5	STC22-25C6*M
33	6	6.0	C5	STC33-25C5*M
68	6	10.0	C6	STC68-25C6*M
35 WVDC @ + 85°C				
0.33	6	0.5	C1	STC.33-35C1*M
0.68	6	1.0	C2	STC.68-35C2*M
1.0	6	1.0	C2	STC1.0-35C2*M
1.5	6	1.0	C2	STC1.5-35C2*M

*Add A for axial, R for radial

STANDARD RATINGS - NON-POLAR CAPACITORS

CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ A)	CASE CODE	PART NUMBER
2 WVDC @ + 85°C				
10	10	1.0	N1	STC10-2N1*M
3 WVDC @ + 85°C				
33	10	2.0	N2	STC33-3N2*M
47	8	3.0	N3	STC47-3N3*M
100	10	6.0	N4	STC100-3N4*M

*Add A for axial, R for radial



STANDARD RATINGS - NON-POLAR CAPACITORS				
CAPACITANCE (μ F)	MAX DF (%)	MAX. DCL @ + 25°C (μ A)	CASE CODE	PART NUMBER
4 WVDC @ + 85°C				
6.8	8	1.0	N1	STC6.8-4N1*M
22	8	2.0	N2	STC22-4N2*M
33	8	3.0	N3	STC33-4N3*M
68	8	6.0	N4	STC68-4N4*M
6 WVDC @ + 85°C				
4.7	6	1.0	N1	STC4.7-6N1*M
15	6	2.0	N2	STC15-6N2*M
22	6	3.0	N3	STC22-6N3*M
47	6	6.0	N4	STC47-6N4*M
10 WVDC @ + 85°C				
3.3	6	1.0	N1	STC3.3-10N1*M
10	6	2.0	N2	STC10-10N2*M
15	6	3.0	N3	STC15-10N3*M
33	6	6.0	N4	STC33-10N4*M
15 WVDC @ + 85°C				
2.2	6	1.0	N1	STC2.2-15N1*M
6.8	6	2.0	N2	STC6.8-15N2*M
10	6	3.0	N3	STC10-15N3*M
22	6	6.0	N4	STC22-15N4*M
20 WVDC @ + 85°C				
1.5	6	1.0	N1	STC1.5-20N1*M
4.7	6	2.0	N2	STC4.7-20N2*M
6.8	6	3.0	N3	STC6.8-20N3*M
15	6	6.0	N4	STC15-20N4*M
25 WVDC @ + 85°C				
1.0	6	1.0	N1	STC1.0-25N1*M
2.2	6	2.0	N2	STC2.2-25N2*M
3.3	6	2.0	N2	STC3.3-25N2*M
4.7	6	3.0	N3	STC4.7-25N3*M
10	6	6.0	N4	STC10-25N4*M
35 WVDC @ + 85°C				
0.68	6	1.0	N1	STC.68-35N1*M

*Add A for axial, R for radial

MARKING			
STC Capacitors case sizes C3 - C6 and N2 - N4 are print marked:		All other case sizes are have color dot marking:	
- Capacitance is in picofarads		Capacitance	Color Digit
- 1st and 2nd digits are significant figures		In picofarads, indicated by 3 dots.	Black 0
- 3rd digit indicates the number of zeros.		1st and 2nd dot give the significant digits.	Brown 1
		3rd dot indicates the number of zeros.	Red 2
		Color dot location is shown on the dimensional sketches.	Orange 3
		Black dot is omitted on black sleeve.	Yellow 4
			Green 5
			Blue 6
			Violet 7
			Grey 8
			White 9
Capacitance Tolerance	Color	Tolerance	
Is indicated by a dot on the side of the case.	Gold	\pm 5%	
Black dot is omitted.	Silver	\pm 10%	
	None	\pm 20%	
	None	+ 40%/- 20%	
The positive lead is indicated by a color dot of red epoxy on the unit.		e.g. Yellow-Violet-Green = 4,700,000 pf = 4.7 μF	

PERFORMANCE AND RELIABILITY

The capacitors are tested in accordance with MIL-PRF-49137, with specific requirements as follows:

Temperature Stability: When tested per MIL-PRF-49137/6, capacitance shall be within +/-15% at -55°C and 85°C, and +/-10% at 25°C after exposure to temperature extremes. DF shall be within 200% of initial limit at -55°C, 150% of initial limit at 85°C, and meet the initial at 25°C. DCL shall be within 10 x initial limit at 85°C, and meet the initial limit at 25°C.

Moisture Resistance: (per Method 106 of MIL-STD-202) After 10 cycles of 24 hours at 25°C to 65°C and 80-98% RH; capacitance shall be within +/-15% of initial value, DF within 1.5 x initial limit and leakage within 3 x initial limit.

Life: (per Method 108 of MIL-STD-202) after 1,000 hours at 85°C and rated voltage; capacitance shall be within +/-10% of initial limit, DF within initial limits, and leakage within 200% of initial limit.


Surge Voltage: (per MIL-PRF-49317) After 1,000 cycles at 85°C and 1.3 x WVDC; capacitance shall be within +/-10% of initial limit, DF and leakage within initial limits.

Resistance to Soldering Heat: (per Method 210 Of MIL-STD-202, Condition B) After immersion in 260°C molten solder to within a 1/4" of the body of the unit, there shall be no evidence of mechanical or electrical degradation.


Solderability: (per Method 208 of MIL-STD-202) After dipping leads in 235°C molten solder to within .125" of the body of the unit, the solder shall cover 95% of the lead surface.

Terminal Strength: (per Method 211 of MIL-STD-202) After the following test there shall be no loosening of the terminals or permanent damage to the terminals. Test Condition A: (Pull Test) 0.010" leads withstand 1 pound, 0.016" leads 2 pounds and 0.007" leads 1/2 pound. Test Condition C: (Bend Test) All leads shall withstand 3-90° bends with a 1/2 pound applied force.

IMPEDANCE vs. FREQUENCY

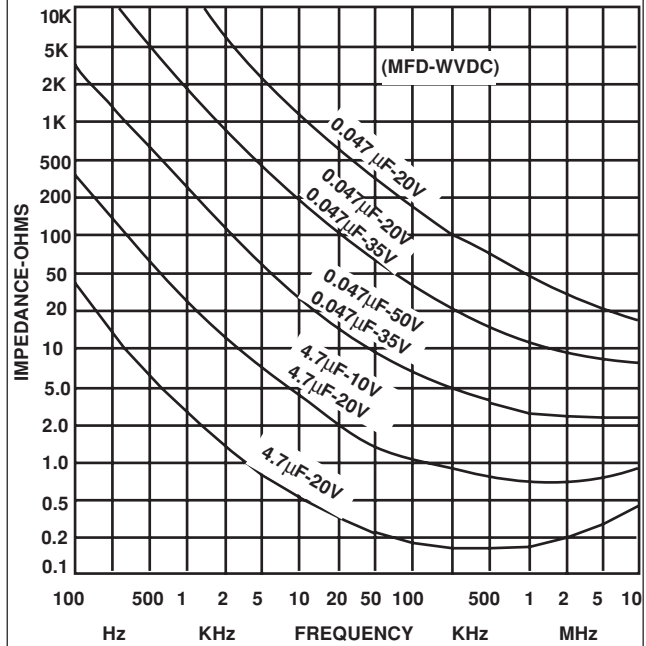

CAPACITANCE vs. TEMPERATURE

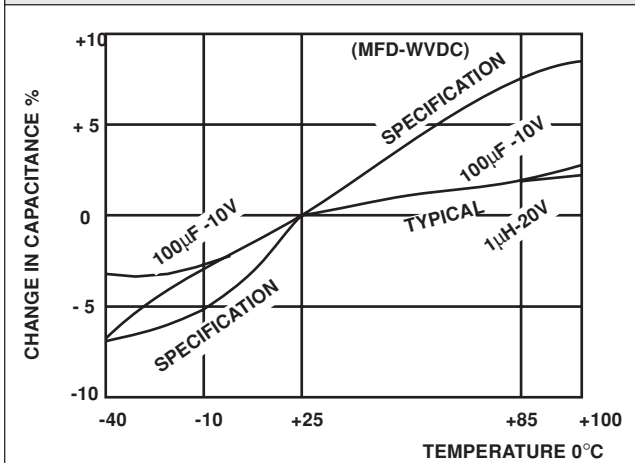

LEAKAGE CURRENT - TEMPERATURE

