




MicroCross™ DVI Digital Visual Interface Shielded I/O Cable Assembly

88741

DVI-Analog to DVI-Analog

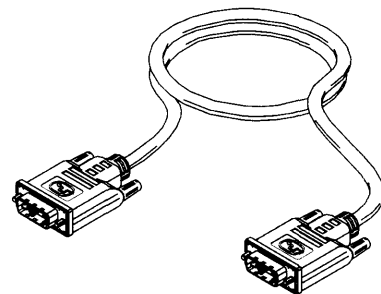

FEATURES AND SPECIFICATIONS

Features and Benefits

- LFH™ (Low Force Helix) rugged contacts offer increased cycle life, mechanical reliability and optimal signal integrity
- Supports up to 2.5 GHz for the analog interface
- Fully shielded against RFI/EMI
- Grounding detents on mating shell
- Positive retention jackscrew: thread 4-40 UNC-2A

Reference Information

Product Specification: PS-74320-001

Packaging: Bag

Mates With: 74320 receptacles (analog or integrated only)

Designed In: Millimeters

Electrical

Voltage: 40V

Current: 1.5A

Dielectric Withstanding Voltage: 500V

Insulation Resistance: Signal—1000 MΩ min.

Coaxial—3300 MΩ min.


Mechanical

Mating Force: 10.0 lbf (4.5kgf) max.

Unmating Force: 2.2 lbf (1.0kgf) min.

Durability: 100 cycles

CATALOG DRAWING (FOR REFERENCE ONLY)

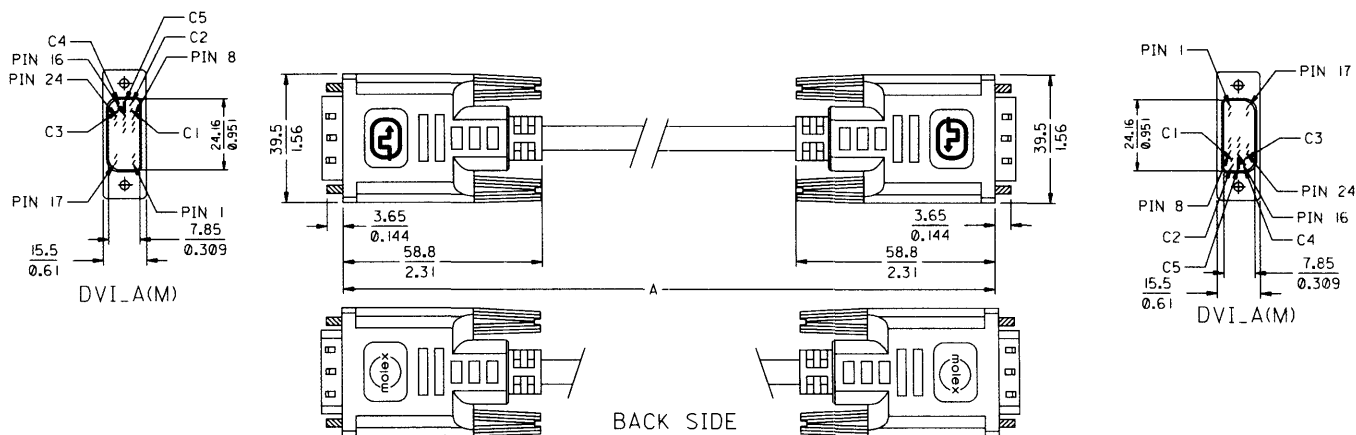

ORDERING INFORMATION AND DIMENSIONS

Order No.	Dimension A	Color
88741-8200	2m (6.56ft)	Black
88741-8210	3m (9.84ft)	Black
88741-8220	5m (16.40ft)	Black
88741-8201	2m (6.56ft)	White
88741-8211	3m (9.84ft)	White
88741-8221	5m (16.40ft)	White