


Dual In-line Adapters / Discrete Component Carriers

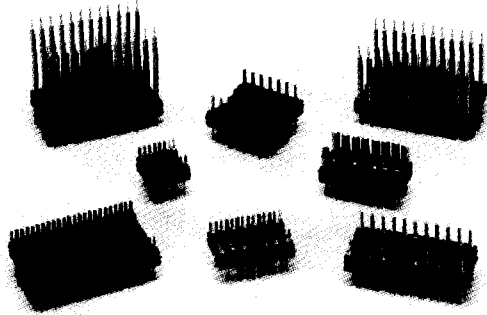

Features:

- Low Profile.
- Design allows for stacking on .100"(2.54mm) grid.
- Board to Board applicable.
- For hand soldering or surface mount applications use HDA only.
- Easily customized to fit your application.
- Also available in open frame see pages 8 and 9 for details.

Terminals:

Brass - Copper Alloy 360, ASTM-B-16

Plating:


Gold over Nickel or
Tin-Lead over Nickel

Standard Adapters

DA - Insulator Material:

Glass Filled Thermoplastic Polyester (P.B.T.)

U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)

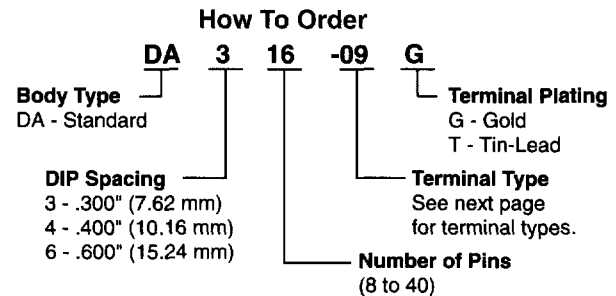



High Temperature Adapters

HDA - Insulator Material:

High Temp. Glass Filled Thermoplastic


U.L. Rated 94V-O, -60° C to 260°C (-76°F to 500°F)

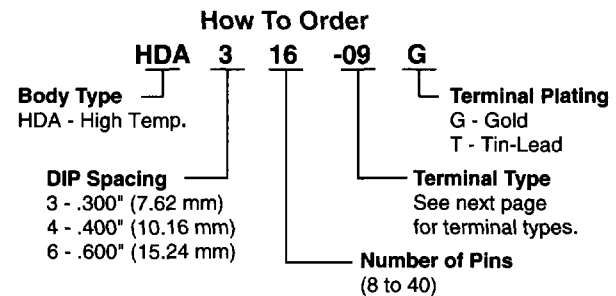




Dual In-line Adapters / Discrete Component Carriers

Dual In-Line

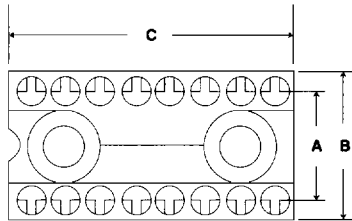

Terminal Type -06 Shown

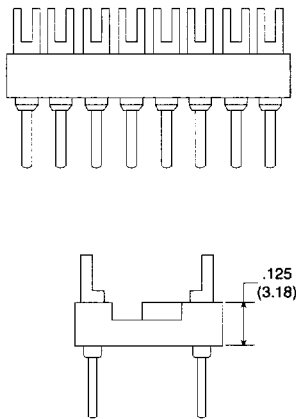

Terminal Information

Terminal Type	Dimensions (inches/mm)
Type -06	.035 Dia. (.89), .100 (2.54), .157 (3.99), .156 (3.96), .018 Dia. (.46)
Type -07	.038 (.97), .232 (5.89), .156 (3.96), .018 Dia. (.46)
Type -08	.025 Dia. (.64), .052 (1.32), .166 (4.22), .103 (2.62), .156 (3.96), .018 Dia. (.46)
Type -09	.018 Dia. (.46), .166 (4.22), .103 (2.62), .156 (3.96), .018 Dia. (.46), .052 (1.32)
Type -68	.018 Dia. (.46), .125 (3.18), .210 (5.33), .125 (3.18), .100 (2.54), .018 Dia. (.46)
Type -43	.018 Dia. (.46), .125 (3.18), .335 (8.51), .100 (2.54), .018 Dia. (.46), .125 (3.18)
Type -399	.018 Dia. (.46), .125 (3.18), .379 (9.63), .100 (2.54), .018 Dia. (.46), .125 (3.18)
Type -185	.018 Dia. (.46), .125 (3.18), .500 (12.70), .100 (2.54), .018 Dia. (.46), .125 (3.18)
Type -42	.018 Dia. (.46), .125 (3.18), .585 (14.86), .100 (2.54), .018 Dia. (.46), .125 (3.18)
Type -398	.018 Dia. (.46), .125 (3.18), .679 (17.25), .100 (2.54), .018 Dia. (.46), .125 (3.18)
Type -403	.018 Dia. (.46), .125 (3.18), .750 (19.06), .100 (2.54), .018 Dia. (.46), .125 (3.18)
Type -71	.018 Dia. (.46), .125 (3.18), .835 (21.21), .100 (2.54), .018 Dia. (.46), .125 (3.18)

Dimensional Information

# of Pins	A	B	C
8	.300 (7.62)	.400 (10.16)	.400 (10.16)
14	.300 (7.62)	.400 (10.16)	.700 (17.78)
16	.300 (7.62)	.400 (10.16)	.800 (20.32)
18	.300 (7.62)	.400 (10.16)	.900 (22.86)
20	.300 (7.62)	.400 (10.16)	1.000 (25.40)
22	.400 (10.16)	.500 (12.70)	1.100 (27.94)
24	.600 (15.24)	.700 (17.78)	1.200 (30.48)
28	.600 (15.24)	.700 (17.78)	1.400 (35.56)
40	.600 (15.24)	.700 (17.78)	2.000 (50.80)

Quick turn delivery available on standard terminal types.

Additional terminal types available.
See terminal section for detailed terminal information.