
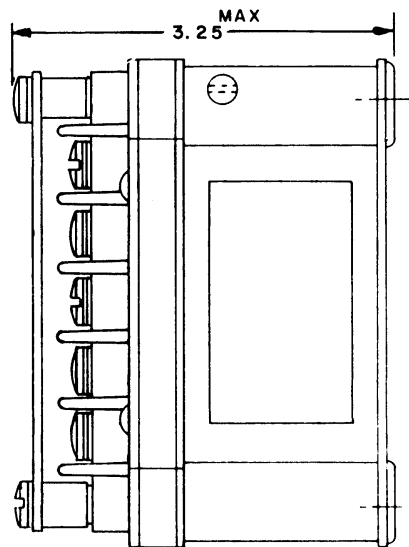



E-326E SPDT, 5 Amps, 460 VAC

Features:

- SPDT Main Contacts
- 460 VAC, 60 Hz, 3Ø Operation
- 5 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

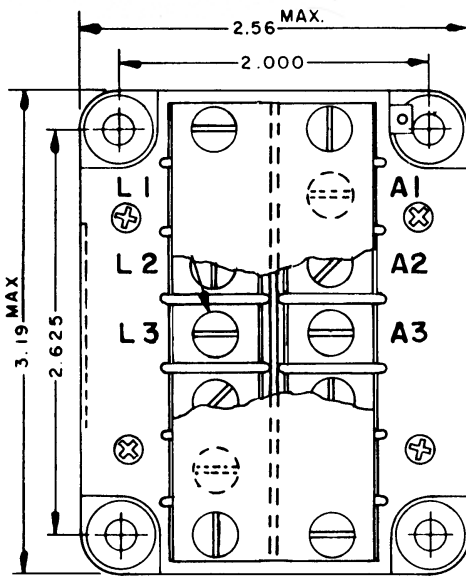

CONTACTOR CONFIGURATION

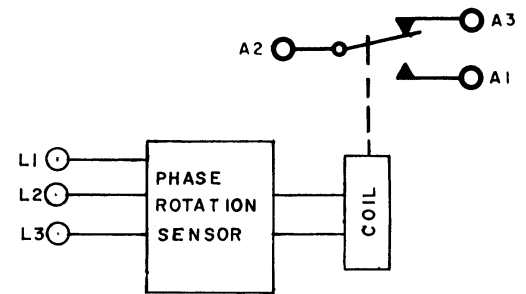

Notes:

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

PRODUCT SPECIFICATIONS	
Construction	Aluminum Can, Glass Mat, Polyester Gasket Sealed
Operating Voltage Input to Sensor	460V, 3 Phase, 3 Wire, L to L
Frequency	60 Hz
Operating Characteristic: Contacts	A1-A2 will close if the input phase rotation is L1-L2-L3. A1-A2 will open if the phase rotation is other than L1-L2-L3.
Contacts: Configuration Rating	SPDT 5 Amps Resistive at 28 VDC and 115 VAC
Environmental Requirements: Operating Ambient Temperature Altitude	-55°F to +165°F 50,000 Feet
Weight Maximum	1 Lb.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.