




**FEATURES**

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Glass passivated junction in a DO-201AD package
- 3 ampere operation at  $T_A=55^{\circ}\text{C}$  with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Fast switching for high efficiency

**MECHANICAL DATA**

Case: Molded plastic, DO-201AD  
 Terminals: axial leads, solderable per MIL-STD-202, Method 208  
 Mounting Position: Any  
 Weight: 0.04 ounce, 1.1 grams

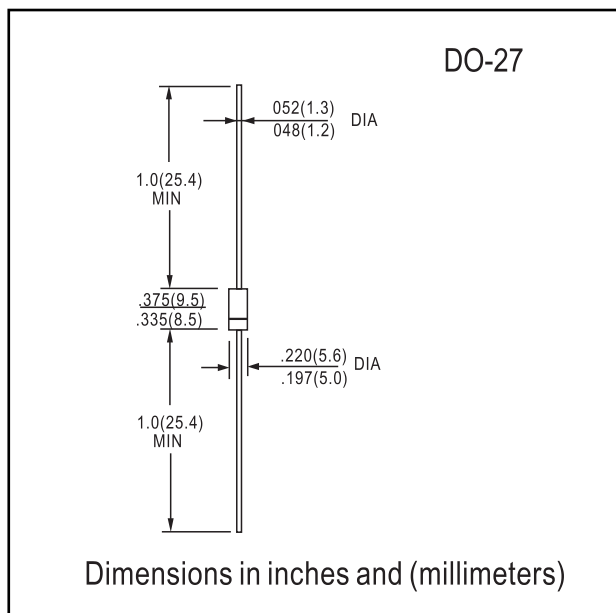

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.


For capacitive load, derate current by 20%.

	PG300R	PG301R	PG302R	PG304R	PG306R	PG308R	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	V
Maximum RMS Voltage	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	V
Maximum Average Forward Rectified Current .375", 9.5mm Lead Length at $T_A=55^{\circ}\text{C}$	3.0						A
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load(JECEC method)	125						A
Maximum Forward Voltage at 3.0A	1.3						V
Maximum Reverse Current at Rated DC $T_a=25^{\circ}\text{C}$	5.0						A
Blocking Voltage $T_a=100^{\circ}\text{C}$	300						
Typical Junction capacitance (Note 1) $C_J$	60						pF
Typical Thermal Resistance (Note 2) $R_{\theta KJA}$	22.0						$^{\circ}\text{C/W}$
Maximum Reverse Recovery Time(Note 3)	150	150	150	150	250	500	ns
Operating and Storage Temperature Range $T_A$	-55 to +150						$^{\circ}\text{C}$

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length P.C.B. mounted
3. Reverse Recovery Test Conditions:  $I_F=.5A$ ,  $I_R=1A$ ,  $I_{rr}=.25A$

**RATINGS AND CHARACTERISTIC CURVES PG300R THRU PG308R**

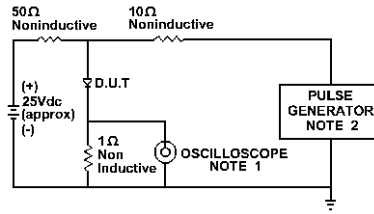

NOTE:1. Rise Time = 7ns max.  
 Input Impedance = 1 megohm. 22pF  
 2. Rise Time = 10ns max.  
 Source Impedance = 50 Ohms




Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

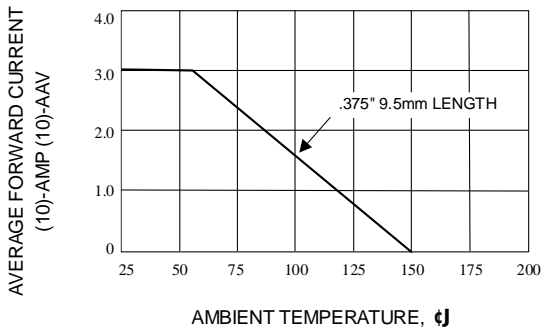


Fig. 2-FORWARD CURRENT CURVE

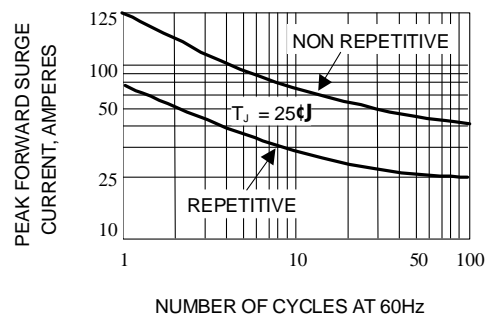


Fig. 3-PEAK FORWARD SURGE CURRENT

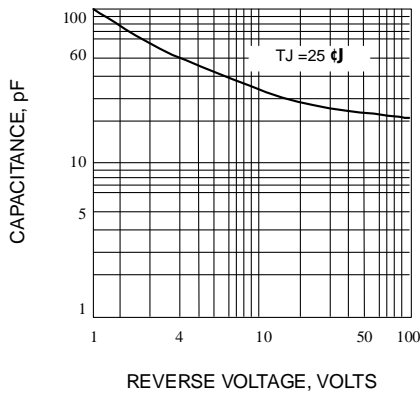


Fig. 4-TYPICAL JUNCTION CAPACITANCE

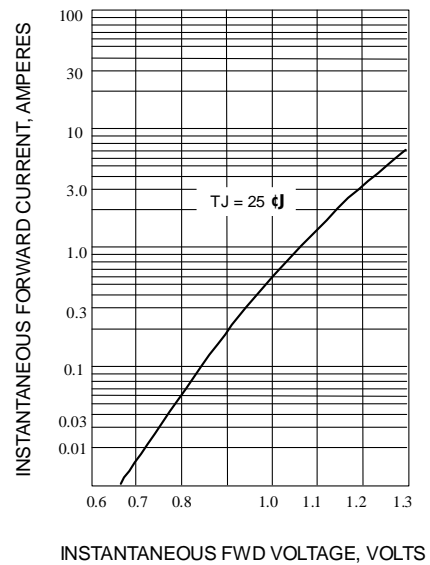


Fig. 5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC