

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412)925-7272
 Powerex Europe, S.A., 428 Avenue G. Durand, BP107, 72003 Le Mans, France(43) 72.75.15

High Frequency Gate-Turn-Off Thyristors

2000 Amperes/ 2000 & 2500 Volts

Description:



Powerex GTOs are designed for use in voltage-source inverter applications requiring fast switching GTOs with low snubber capacitances.

Features:

- Low Snubber Capacitance (2.0 μ F for 2000A switch)
- High Frequency Operation (1.5kHz)
- Low Switching Losses
- Fast Switching Time (t_{tr} = 20 μ S maximum)
- Low On-State Voltage

Applications:

- Motor Control Inverters
- UPS Inverters
- Traction
- Choppers
- Induction Heaters
- DC to DC Converters

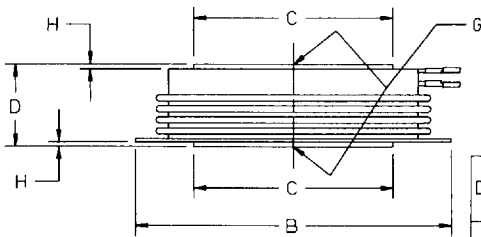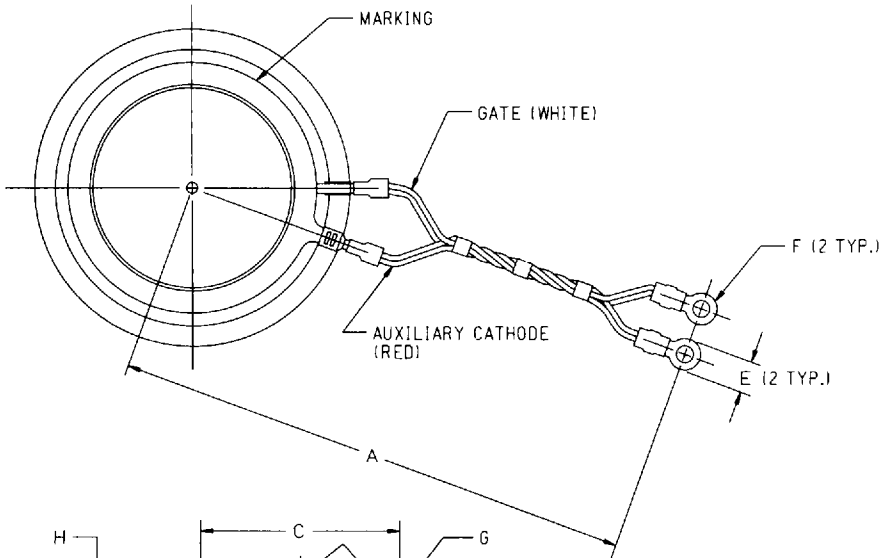

DIM	INCHES	MILLIMETERS
A	15.4 \pm .3	390 \pm 8
B	3.94 DIA. MAX	DIA. 100.0 MAX
C	2.48 DIA.	DIA. 63.0
D	1.02 \pm .02	26.0 \pm 0.5
E	.39	10.0
F	.21	5.4
G	.138 \pm .008 DIA.	DIA. 3.50 \pm 0.20
	.087 \pm .008 DEEP	DEEP 2.20 \pm 0.20
H	.016 MIN	MIN 0.40

Ordering Information

Example: Select the complete ten digit device part number from the table below.

DEVICE	CURRENT RATING	MANU. NUMBER	TYPE	VOLTAGE RATING
FG	2000	D	X	- 40 - 50
PRESS PACK GTO	I_{TORM} 2000 A		HIGH FREQUENCY High Voltage	V_{DRM} 40=2000V 50=2500V

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412)925-7272
 Powerex Europe, S.A., 428 Avenue G. Durand, BP107, 72003 Le Mans, France(43) 72.75.15

FG2000DX-40,50
 High Frequency
Gate-Turn-Off Thyristors
 2000 Amperes/2000 & 2500 Volts

Absolute Maximum Ratings, $T_J=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	FG2000DX-40	FG2000DX-50	Units
Repetitive Peak Reverse Voltage	V_{RRM}	17	17	Volts
Non-Repetitive Peak Reverse Voltage	V_{RSM}	17	17	Volts
DC Reverse Voltage	$V_{R(DC)}$	17	17	Volts
Repetitive Peak Off-State Voltage	V_{ORM}	2000	2500	Volts
Non-Repetitive Peak Off-State Voltage	V_{OSM}	2100	2500	Volts
DC Off-State Voltage	$V_{O(DC)}$	1600	2000	Volts
Controllable On-State Current	$V_D=1/2V_{ORM}, T_J=125^\circ\text{C}, C_S=2.0\mu\text{F}$ $L_S=0.2\mu\text{H}, I_{GQ}=-200\text{A}$		$I_{T(ORM)}$ 2000	A
RMS On-State Current			$I_{T(RMS)}$ 1180	A
Average On-State Current	Sine-wave $\Theta=180^\circ, T_s=73^\circ\text{C}, f=60\text{ Hz}$		$I_{T(AV)}$ 750	A
Surge On-State Current	NON-REP, One half cycle at 60Hz		I_{TSM} 13,000	A
I^2t for Fusing	One half cycle at 60 Hz		I^2t 700,000	$\text{A}^2\text{-sec}$
Critical Rate of Rise of On-State Current	$V_G=1/2 V_{ORM}, I_{GM}=30\text{A}, T_J=125^\circ\text{C}$		di/dt 600	$\text{A}/\mu\text{S}$
Peak Gate Forward Current			I_{FGM} 70	A
Peak Gate Reverse Current			I_{RGM} 600	A
Peak Gate Forward Voltage			V_{FGM} 10	V
Peak Gate Reverse Voltage			V_{RGM} 17	V
Peak Gate Forward Power Dissipation			P_{FGM} 280	W
Peak Gate Reverse Power Dissipation			P_{RGM} 18,000	W
Average Gate Forward Power Dissipation			$P_{FG(AV)}$ 50	W
Average Gate Reverse Power Dissipation			$P_{RG(AV)}$ 150	W
Junction Temperature			T_J -40 TO +125	$^\circ\text{C}$
Storage Temperature			T_{stg} -40 TO +150	$^\circ\text{C}$
Mounting Force	RECOMMENDED VALUE 25.5 kN or 5732 lbs.		23.5 TO 30.4 5290 TO 6835	kN lbs.
Weight (typical)			880	grams

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412)925-7272

Powerex Europe, S.A., 428 Avenue G. Durand, BP107, 72003 Le Mans, France(43) 72.75.15

FG2000DX-40,50
High-Frequency
Gate-Turn-Off Thyristors
2000 Amperes/2000 & 2500 Volts


Electrical Characteristics, $T_j=25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Repetitive Peak Reverse Leakage Current	I_{RRM}	$T_j=125^\circ\text{C}$, $V_R=V_{RRM}$	-----	-----	100	mA
Repetitive Peak Forward Leakage Current	I_{DRM}	$T_j=125^\circ\text{C}$, $V_D=V_{DRM}$, $V_{GK}=-2\text{V}$	-----	-----	100	mA
Gate Reverse Blocking Current	I_{RG}	$T_j=125^\circ\text{C}$, $V_{RG}=-15\text{V}$	-----	-----	100	mA
Peak On-State Voltage	V_{TM}	$T_j=125^\circ\text{C}$, $I_{TM}=2000\text{A}$	-----	-----	3.5	V
Critical Rate of Rise of Off-State Voltage	dv/dt	$T_j=125^\circ\text{C}$, $V_D=50\% V_{DRM}$, $V_{GK}=-2\text{V}$	1000	-----	-----	V/ μS
Turn-Off Time	t_{pr}	$I_{TM}=2000\text{A}$, $T_j=125^\circ\text{C}$, $V_{GR}=-17\text{V}$, $C_S=2.0\mu\text{F}$, $L_S=0.2\mu\text{H}$ $di_d/dt=40\text{A}/\mu\text{s}$, $V_D=50\% V_{DRM}$	-----	-----	20	μS
Critical Off-Bias Time ($t_{pr} + t_{sw}$)	t_{sw}				50	μS
Turn-On Time	t_{pi}	$I_{TM}=2000\text{A}$, $T_j=125^\circ\text{C}$, $I_{GM}=30\text{A}$, $V_D=1/2 V_{DRM}$	-----	-----	10	μS
Gate Trigger Current	I_{GT}	$V_D=5\text{V TO } 20\text{V}$, $I_T=25\text{A TO } 200\text{A}$	-----	-----	4.0	A
Gate Trigger Voltage	V_{GT}	$V_D=5\text{V TO } 20\text{V}$, $I_T=25\text{A TO } 200\text{A}$	-----	-----	1.5	V


Thermal Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Units
Thermal Resistance Junction to Sink	$R_{\theta js}$	-----	-----	0.018	$^\circ\text{C/W}$

MAXIMUM ON-STATE CHARACTERISTIC

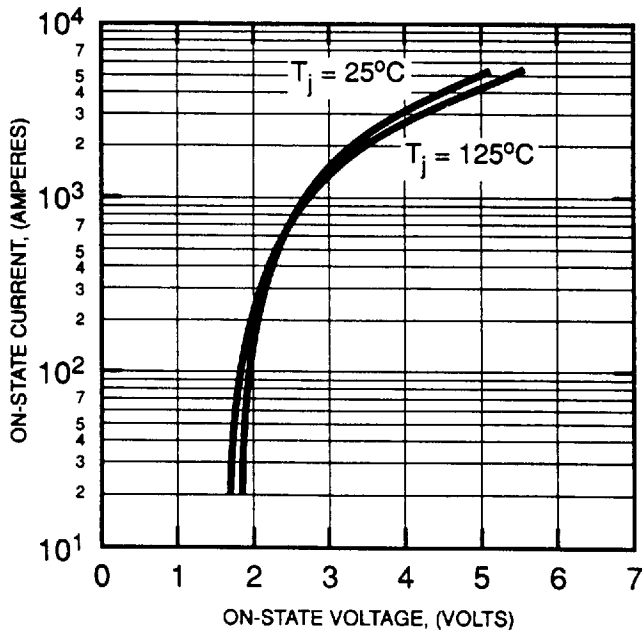


TRANSIENT THERMAL IMPEDANCE CHARACTERISTIC, (JUNCTION TO SINK)

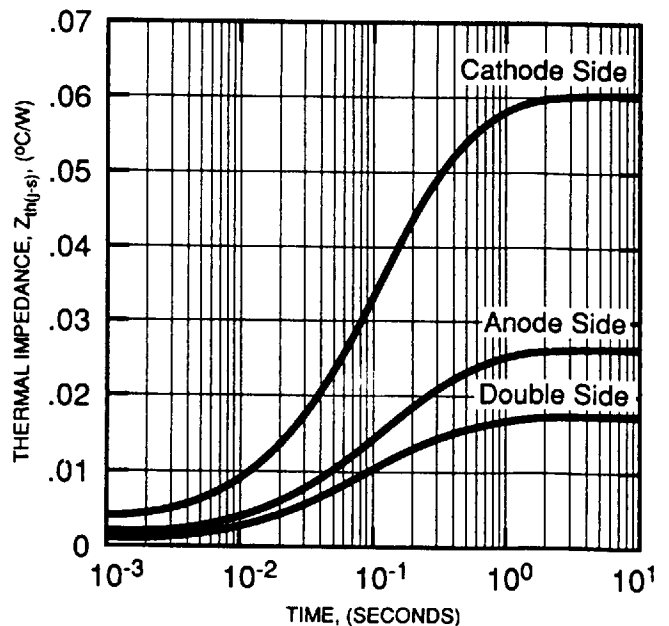


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412)925-7272
 Powerex Europe, S.A., 428 Avenue G. Durand, BP107, 72003 Le Mans, France(43) 72.75.15

FG2000DX-40,50
 High Frequency
Gate-Turn-Off Thyristors
 2000 Amperes/2000 & 2500 Volts


MAXIMUM TURN-ON SWITCHING ENERGY DISSIPATION PER PULSE

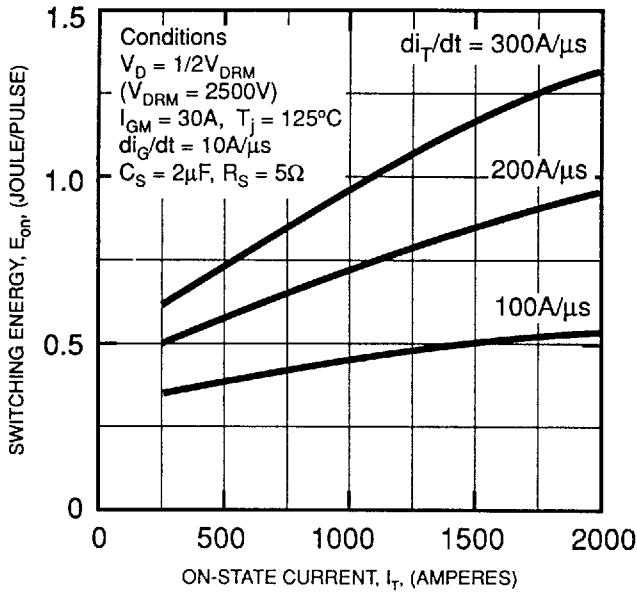


MAXIMUM TURN-OFF SWITCHING ENERGY DISSIPATION PER PULSE

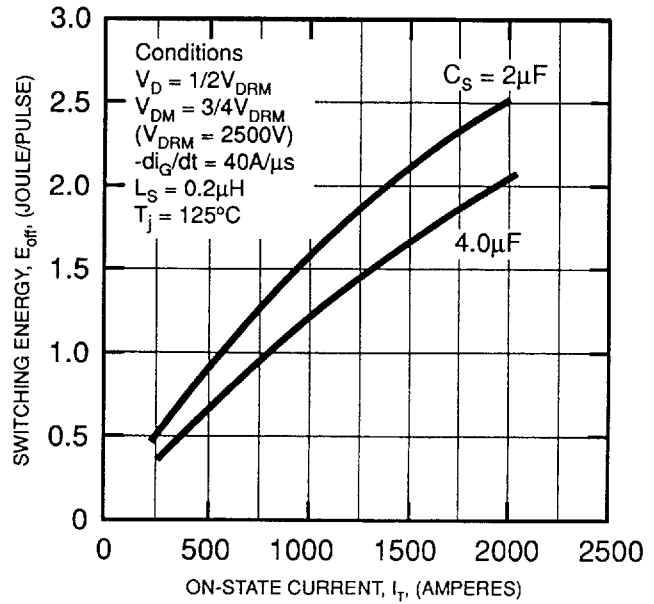

MAXIMUM CONTROLLABLE ON-STATE CURRENT VS. SNUBBER CAPACITANCE

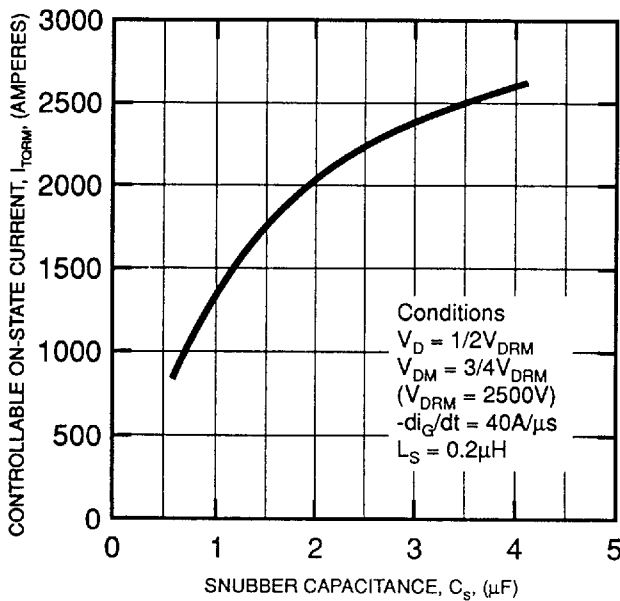


PEAK ONE-CYCLE ON-STATE SURGE CURRENT AND I²t

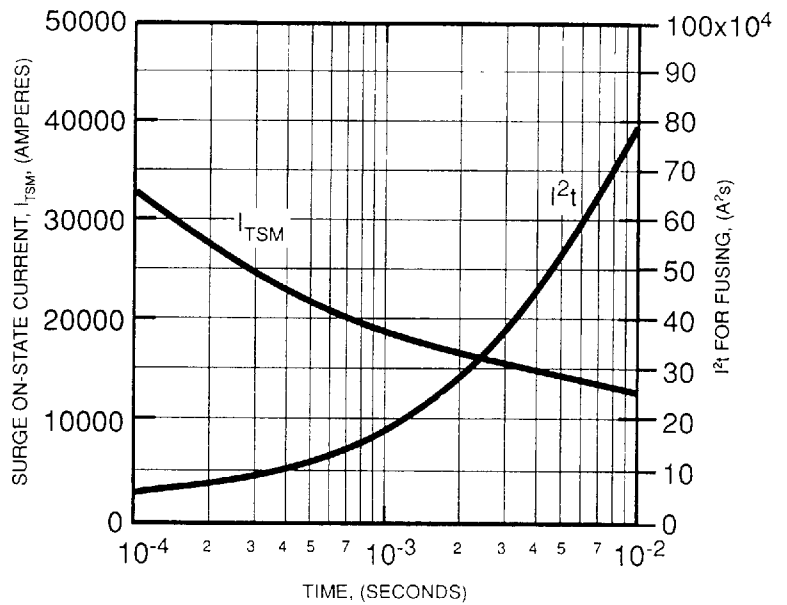


Powerex, Inc., Hills Street, Youngwood, Pennsylvania 15697 (412)925-7272
 Powerex Europe, S.A., 42B Avenue G. Durand, BP107, 72003 Le Mans, France(43) 72.75.15

FG2000DX-40,50
 High Frequency
Gate-Turn-Off Thyristors
 2000 Amperes/2000 & 2500 Volts


TURN-OFF TIME, STORAGE TIME, FALL TIME VS. ON-STATE CURRENT

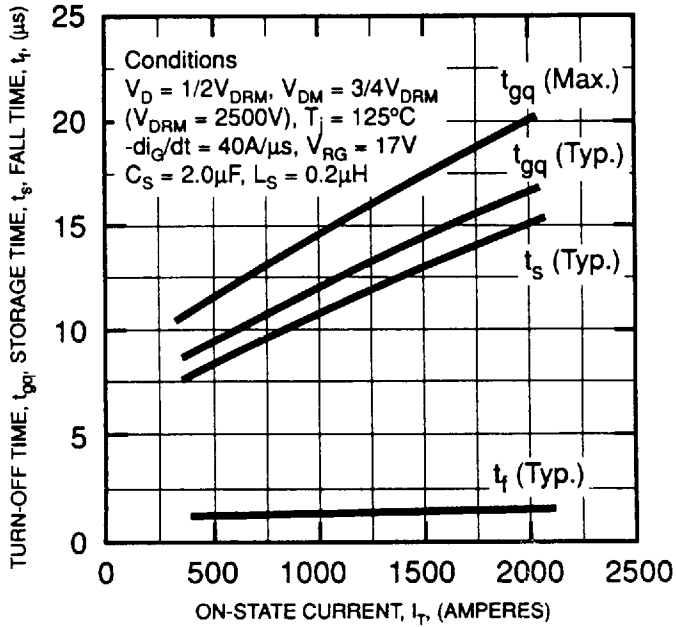


TURN-OFF TIME, STORAGE TIME, FALL TIME VS. RATE-OF-FALL OF GATE TURN-OFF CURRENT

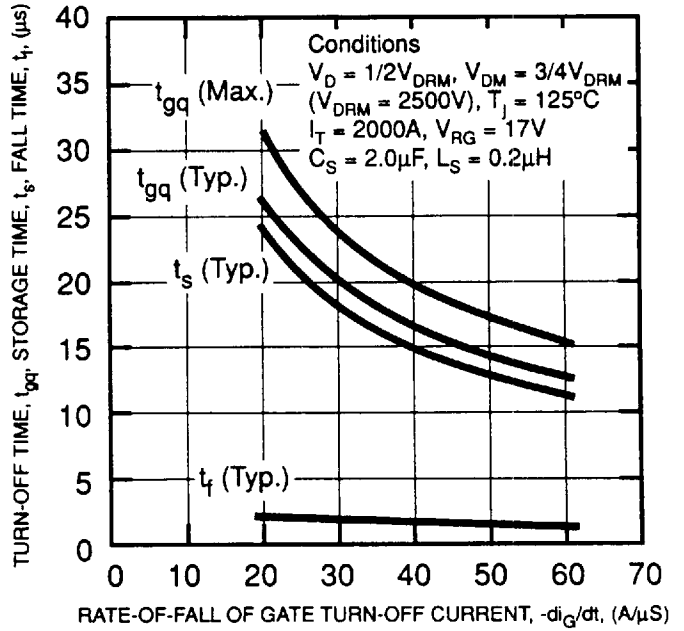

TYPICAL TURN-ON TIME, TURN-ON DELAY TIME VS. GATE CURRENT

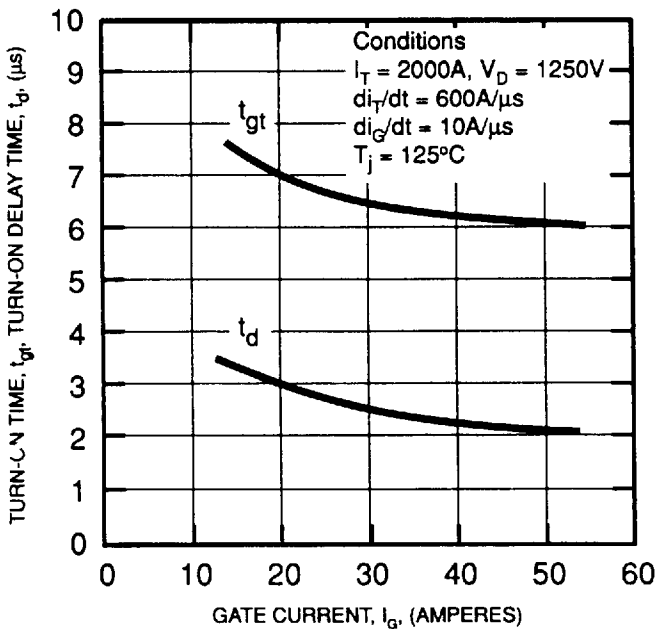

MAXIMUM CRITICAL REVERSE BIAS TIME, TAIL TIME VS. OFF-STATE VOLTAGE

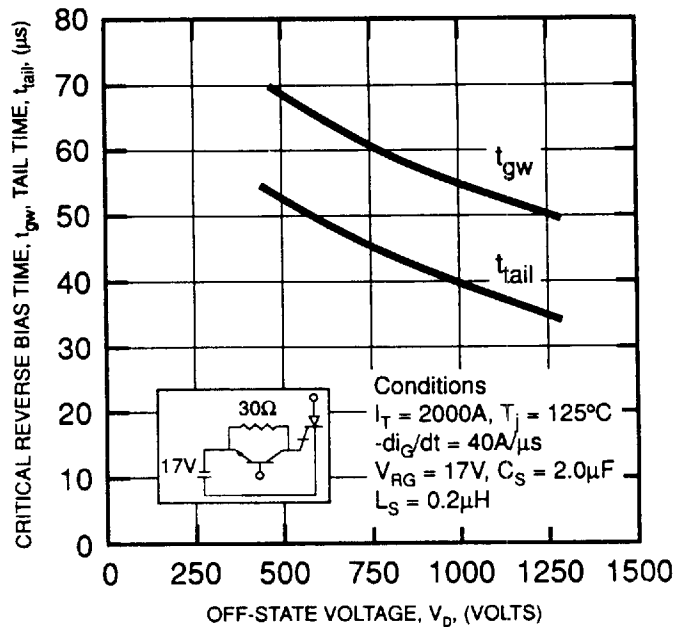


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412)925-7272
 Powerex Europe, S.A., 428 Avenue G. Durand, BP107, 72003 Le Mans, France(43) 72.75.15


FG2000DX-40,50
 High Frequency
 Gate-Turn-Off Thyristors
 2000 Amperes/2000 & 2500 Volts

POWEREX INC

MAXIMUM GATE TURN-OFF CURRENT VS. ON-STATE CURRENT

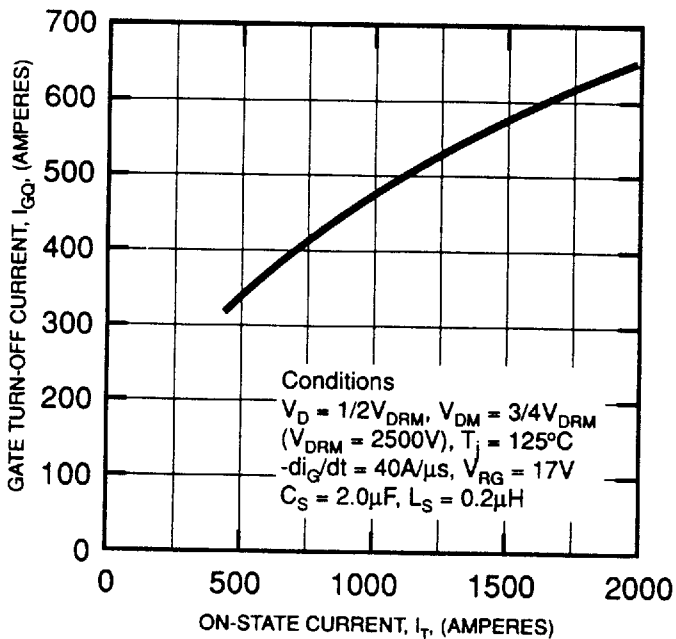

MAXIMUM GATE TURN-OFF CURRENT VS. RATE-OF-FALL OF GATE TURN-OFF CURRENT

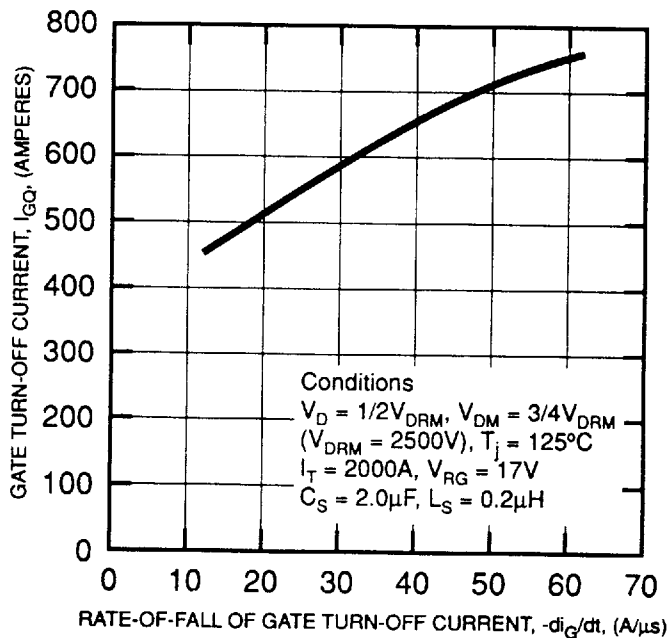

MAXIMUM GATE TRIGGER VOLTAGE, GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE

