

PARAMETERS


1N2996A
 REF/REG DIODE, 5W < P(D) s 10W

Description: Ref/Reg Diode, 5W < P(D) s 10W

Manufacturer.....	
Mil/High-Rel? (Y/N).....	
Nom. Ref. Volt.....	50
Test Current.....	50m
Tol. (%).....	10
PD Max. (W).....	10
Dyn. Zmax (j).....	15
Temp Coef pp/10k.....	9.0
Oper. Temp (x°C) Max.....	175 ~
Pkg Style.....	DO-4
Surface Mounted Yes/No.....	NO

~ Storage Temperature

D04

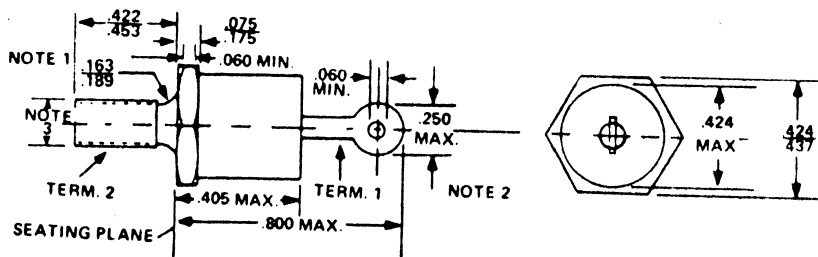

NOTES:

1. COMPLETE THREADS TO EXTEND TO WITHIN 2-1/2 THREADS OF SEATING PLANE.
2. ANGULAR ORIENTATION OF THIS TERMINAL IS UNDEFINED.
3. 10-32 UNF 2A MAXIMUM PITCH DIAMETER OF PLATED THREADS SHALL BE BASIC PITCH DIAMETER (.1697", 4.29 MM) REF. (SCREW THREAD STANDARDS FOR FEDERAL SERVICES 1957) HANDBOOK H28 P1.

