

# 1.27X1.27mm DUAL ROW SOCKET DIP TYPE

(WITH POLARIZATION KEY)




## 127150FS Series

Mates with SUYIN 127153, 127154, 127155, 127157, 127196 Series

### Specifications:

- **10-100 Circuits**
- **Insulator material** : Black High Temp . Plastic
- **Max.Processing Temp.** : 230°C for 30 Seconds
- **Terminal Material** : Phosphor Bronze
- **Plating** : Selective Plated(Gold/Tin) or Full Gold Plated
- **Max. Current Rating** : 1.0A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V(Min. 60 seconds)

1.27  
mm

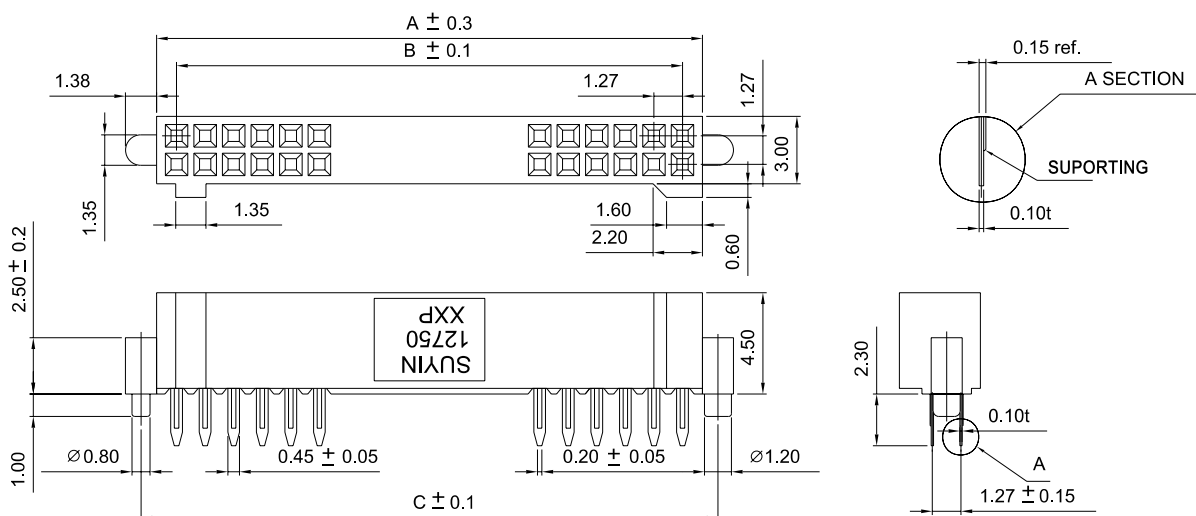

## Order Information


127150FS□□□□42ZU  
1 2 3 4 5

1. 'S' : Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package

'U' : Tube Package Without CAP

Reference Page 11

## Recommended P.C.B. Layout

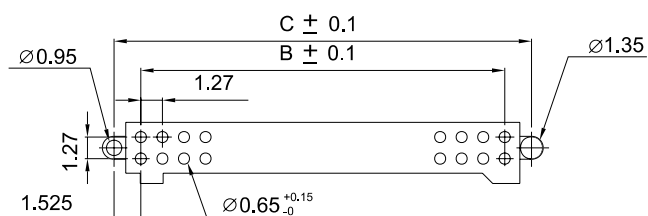

## Dimensional Information

SUYIN P/NO.	NO. PINS	DIM.A	DIM.B	DIM.C
127150FS010□□42ZU	10	6.75	5.08	8.13
127150FS016□□42ZU	16	10.56	8.89	11.94
127150FS020□□42ZU	20	13.10	11.43	14.48
127150FS024□□42ZU	24	15.64	13.97	17.02
127150FS030□□42ZU	30	19.45	17.78	20.83
127150FS040□□42ZU	40	25.80	24.13	27.18
127150FS044□□42ZU	44	28.34	26.67	29.72
127150FS050□□42ZU	50	32.15	30.48	33.53
127150FS060□□42ZU	60	38.50	36.83	39.88
127150FS068□□42ZU	68	43.58	41.91	44.96
127150FS070□□42ZU	70	44.85	43.18	46.23
127150FS080□□42ZU	80	51.20	49.53	52.58
127150FS090□□42ZU	90	57.55	55.88	58.93
127150FS100□□42ZU	100	63.90	62.23	65.28