


5.08mm (.200") Pitch SPOX™ Crimp Terminal Housing

5197-N

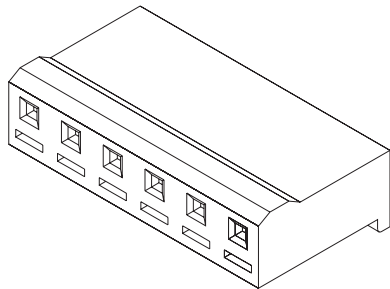

| Circuits | Order No. |
|----------|----------------------------|
| 2 | 10-01-3026 |
| 3 | 10-01-3036 |
| 4 | 10-01-3046 |
| 5 | 10-01-3056 |
| 6 | 10-01-3066 |
| 7 | 10-01-3076 |
| 8 | 10-01-3086 |
| 9 | 10-01-3096 |

Features and Benefits

- Sizes 2 to 9 circuits
- Molded pull tab
- With locking ramp
- Molded-in locking arm for terminal

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5279-NA, 5280-NA, 5281-NA and
 5282-NA headers
 Use With: 5194 terminal
 Designed In: Millimeters

Electrical


Voltage: 250V
 Current: 5194—7.0A
 5225—4.0A
 Contact Resistance: 10 milliohms max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 Megohms min.

Physical

Housing: 6/6 nylon, UL 94V-2
 Operating Temperature: -40 to +105°C

5.08mm (.200") Pitch SPOX™ Crimp Terminal Housing

**5198-N
With Void**

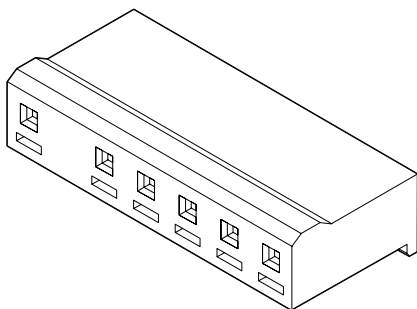

| Circuits | Order No. |
|----------|----------------------------|
| 2 | 10-22-1022 |
| 3 | 10-22-1032 |
| 4 | 10-22-1042 |
| 5 | 10-22-1052 |
| 6 | 10-22-1062 |
| 7 | 10-22-1072 |
| 8 | 10-22-1082 |

Features and Benefits

- Sizes 2 to 8 circuits
- Same as 5197 but with second circuit void

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5283-NA, 5284-NA, 5285-NA and
 5286-NA headers
 Use With: 5194, 5225
 Designed In: Millimeters

Electrical

Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10 milliohms max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 Megohms min.

Physical

Housing: 6/6 nylon, UL 94V-2
 Operating Temperature: -40 to +105°C