

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.75Lbs (0.34kgf) min. per Contact

Durability: 25 Cycles

Dram Board Insertion Force: 3 oz max. per Contact

Electrical

Voltage Raging: 250V AC

Current Rating: 1.0A max., 30 max., in Temperature Rise

Insulation Resistance: 1000MW min. initial

Dielectric Withstanding Voltage: 500V AC at Sea Level **Low Level Contact Resistance:** 30mW max. initial

Physical

Housing: Thermoplastic, UL 94V-0 rated in White Color

Contact: Copper alloy


Ejector: Thermoplastic, UL 94V-0 rated in Ivory or Natural Color


Metal Hold Down: Copper alloy

Operating Temperature: -55 to +105


DDR II Connector

AT240 Series Vertical Type, T/H Type 1.00mm [.039"] Pitch 240 Pos.



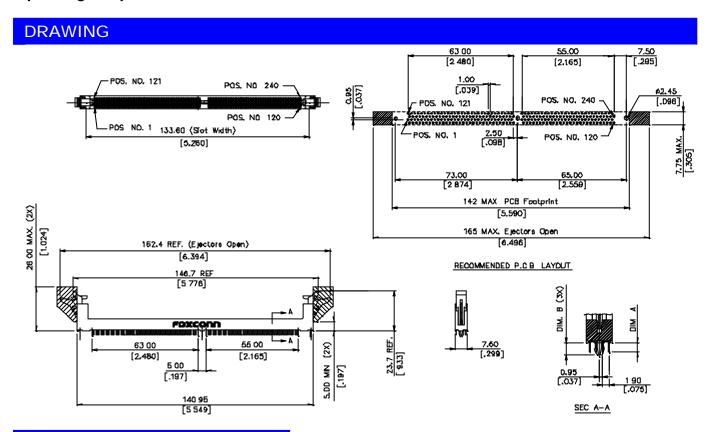

ORDERING INFORMATION

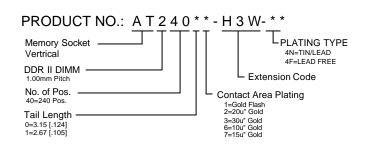

AT2400*—H3W—**	240	1,8V	3.15 [124]	3.78 [.149]
AT2401*—H3W-**		1 8V	2.67 [105]	4.57 [.1 8 0]
P/N	P05.	VOLTAGE MARKING	DIM. A	DIM. 8