


DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF TROMPETER ELECTRONICS INC.



REVISIONS		305-1518	SH 1
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER ECO #15385	4-01-04	RM.

TABLE 1		
DASH NO	CABLES ACCOMMODATED	ASSEMBLE PER
-7	TRC-50-2/TRC-75-2	TAI-189
-9	TWC-78-2/TWC-124-2	TAI-102
-23	250-3884, MICRODOT	TAI-189
-24	202-3934, MICRODOT	TAI-102
-24A	9530A5117, RAYCHEM	TAI-189
-25	T-43M, GENERAL	TAI-102
-25A	5021H5331, RAYCHEM	TAI-189
-26	7028A5518, RAYCHEM	TAI-189
-27	202-3927, MICRODOT	TAI-102
-29	TWC-78-1/TWC-124-1A	TAI-102
-30	761A, W.E.CO./B441, BELDEN	TAI-102
-32	TRC-50-1	TAI-189
-33	TRC-75-1	TAI-189
-42	21-204, ESSEX 4463, CONSOLIDATED	TAI-189
-43	250-4044/250-4045 293-3930, MICRODOT	TAI-102
-45	M27500-22TE2T14 1100-66F, STANDARD	TAI-189
-47	M17/176-00002	TAI-102
-49	TWAC-78-1F2	TAI-189
-55	89272, BELDEN	TAI-102
-56	GC875GC1, GRUMMAN	TAI-189
-57	GC875GB1, GRUMMAN	TAI-102
-58	GC875TM24H, GRUMMAN	TAI-189
-59	GC875LN1, GRUMMAN	TAI-102
-60	M17/177, THERMATICS 380-10045, BOEING	TAI-189
-64	7528A5314, RAYCHEM	TAI-189


TABLE 3			
POLARIZATION CHART			
KEYING LETTER	A DEGREES	B DEGREES	C DEGREES
NONE	120°	120°	120°
T	100°	150°	110°
U	120°	130°	110°
V	115°	130°	115°
W	125°	110°	125°
X	130°	100°	130°
Y	110°	140°	110°
Z	100°	160°	100°
S	135°	135°	90°

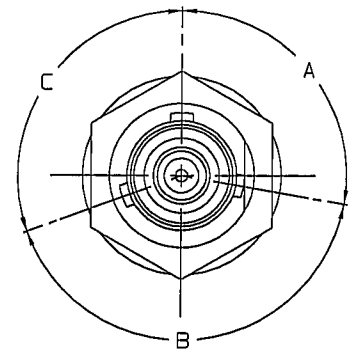

-7 SHOWN
FIG 1

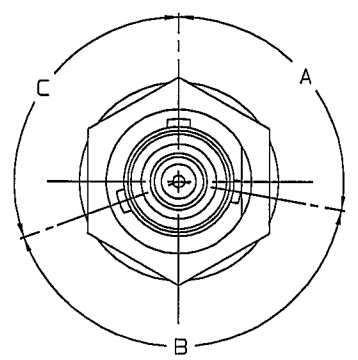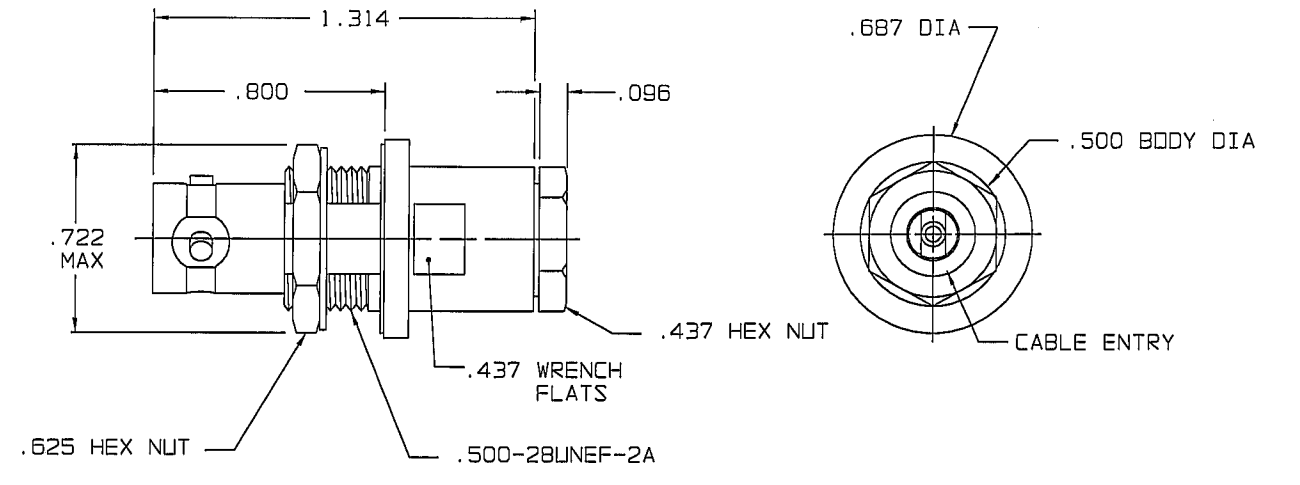

-7 SHOWN
FIG 2

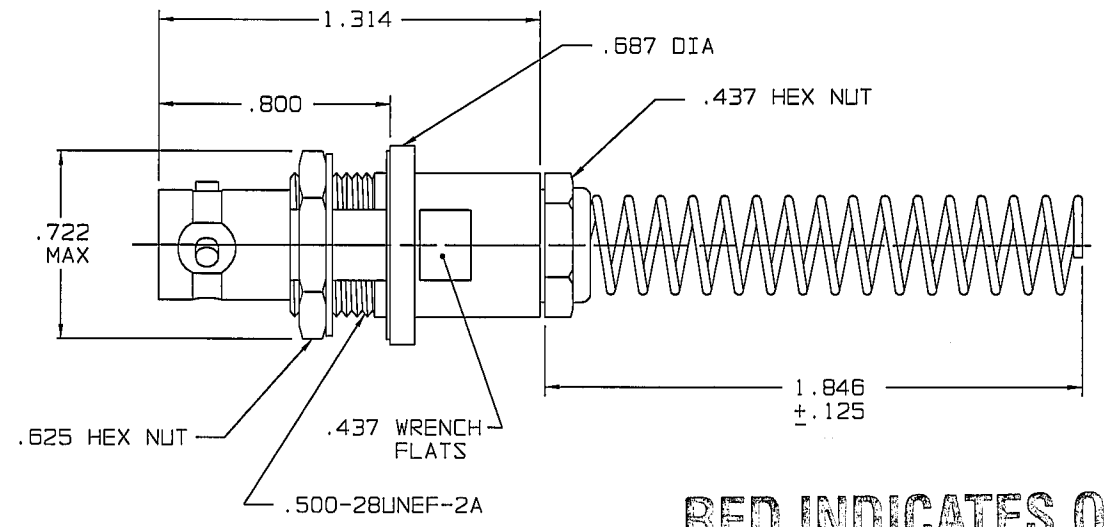


RED INDICATES ORIGINAL

8 CHECK WITH CABLE MANUFACTURER FOR OUTGASSING PROPERTIES OF THE SELECTED CABLE

7. ALL MATERIALS MEET THE OUTGASSING REQUIREMENTS OF NASA SPECIFICATION SP-R-0022A AND TEI VACUUM READY SPECIFICATION TT-09

6. EXAMPLE OF COMPLETE PART NO:

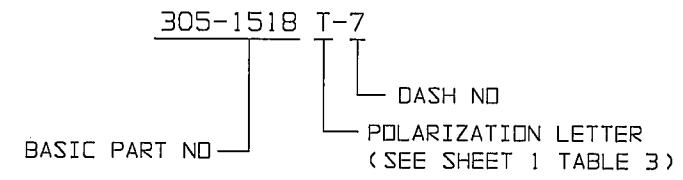


5 IF BEND RELIEF SPRING REQD ADD SUFFIX "BR" TO MODEL NO (SEE FIG 2)

4. CONCENTRIC TWINAX/TRIAX TRB BULKHEAD MOUNT VACUUM READY CABLE RECEPTACLE

3. MAX PANEL THK .160

2. FINISH: TFS-1A (NICKEL)

1. ALL DIM ARE IN INCHES

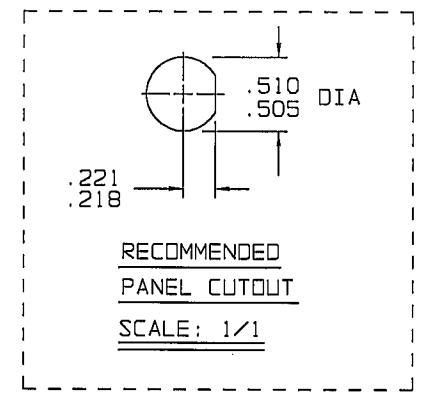

INTERPRET DRAWING PER MIL-STD-100 DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED		TOL: UNLESS SPECIFIED .XX .XXX .005 .XXXX			TITLE: BJ79/T/U/V/W/ X/Y/Z/S/BR VACUUM READY
DRAWN PD CHECKED RM/MSK 4/1/04 QUALITY RM/MSK 4/1/04 MANUF RM/MSK 4/1/04 APPROVED RM/MSK 4/1/04 CAD FILE NO 305-1518B	DATE 3-23-04 MATERIAL: FINISH:	SIZE B CAGE CODE 14949 SCALE NONE	DRAWING NO. 305-1518 DATE: 12-17-01 SHEET 1C		

NEXT ASSY