


PANDUIT® Copper Long Barrel Butt Splices (Type SCL)

Copper Splices

For Use With Copper Cables Only

Butt Splice Long Barrel Type SCL

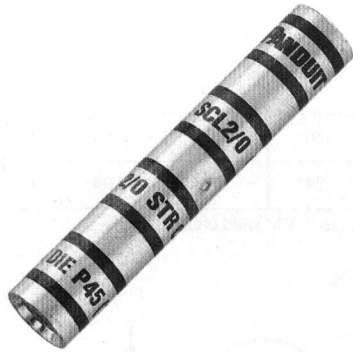


- Color coded to show proper die number and color for code cable
- U.L. listed per 486A up to 35KV**
- Internal wire stops to prevent over insertion of cable



Part Number	* Copper Conductor Size	* Locomotive Conductor Size	Code Cable Die Color & No.	Dimensions (In.)			Std. Pkg. Qty.
				Barrel		A	
				I.D.	O.D.		
SCL8-L	#8 AWG or 23 Navy	37/24	Red 21	.18	.27	2.25	50
SCL6-L	#6 AWG or #6 Weld 30 Navy	61/24	Blue 24	.22	.31	2.38	50
SCL4-L	#4 AWG or #4 Weld 40-50 Navy	105/24	Gray 29	.28	.38	2.38	50
SCL2-Q	#2 AWG or 60 Navy	—	Brown 33	.31	.42	2.62	25
SCL1-E	#1 AWG or #2 Weld 75 Navy	150/24	Green 37	.36	.46	2.87	20
SCL1/0-X	1/0 AWG or #1 Weld 100 Navy	225/24	Pink 42	.39	.52	2.87	10
SCL2/0-X	#2/0 AWG or #1/0 Weld 125 Navy	275/24	Black 45	.45	.58	3.13	10
SCL3/0-X	#3/0 AWG or #2/0 Weld 150 Navy	325/24	Orange 50	.51	.64	3.12	10
SCL4/0-X	#4/0 AWG or #3/0 Weld 200 Navy	450/24	Purple 54	.57	.71	3.37	10
SCL250-X	250 kcmil or #4/0 Weld 250 Navy	550/24	Yellow 62	.63	.77	3.38	10
SCL300-X	300 kcmil	—	White 66	.65	.81	4.12	10
SCL350-X	350 kcmil or 250 kcmil Weld	650/24	Red 71	.70	.88	4.12	10
SCL400-6	400 kcmil or 300 kcmil Weld	775/24	Blue 76	.76	.95	4.37	6
SCL500-6	500 kcmil or 350 kcmil Weld	925/24	Brown 87	.84	1.06	4.62	6
SCL600-6	600 kcmil or 400 kcmil Weld	1100/24	Green 94	.92	1.19	5.50	6
SCL750-6	750 kcmil or 500 kcmil Weld	1325/24	Black 106	1.03	1.30	5.87	6
SCL1000-3	1000 kcmil	1925/24	White 125	1.17	1.50	6.12	3

*UL LISTED and CSA CERTIFIED with code, locomotive and class K & M weld cables

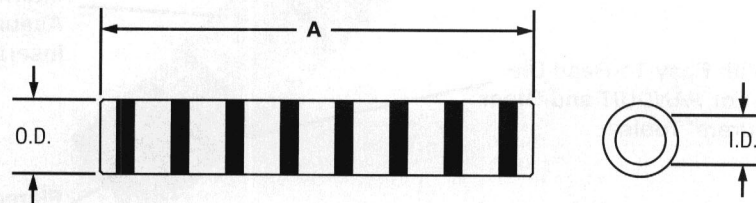

**Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. See tool chart on page 76-77 for additional information.

Order the number of pieces required in multiples of standard package quantity.
3 = 3 pcs., 6 = 6 pcs., X = 10 pcs., E = 20 pcs., Q = 25 pcs., and L = 50 pcs.