


TCMD-20-S-10.00-01



TCMD-05-S-12.00-01

2mm IDC CABLE STRIPS TCMD SERIES

Mates with:
SMM, MMS

FEATURES

- Low profile, only (5,00mm) .200" assembled height
- Ask about our custom IDC design capabilities

SPECIFICATIONS

For complete specifications see www.samtec.com?TCMD

Insulator Material:
Black Glass Filled Polyester
Terminal:
Phosphor Bronze
Current Rating:
1A
Plating:
150µ" (3,8µm) Sn over 50µ" (1,27µm) Ni
Operating Temp Range:
-40°C to +105°C
Wire:
28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator












TYPE STRIP	NO. PINS PER ROW	END OPTION	OVERALL LENGTH	01	TRANSFER OPTION	OTHER OPTION
------------	------------------	------------	----------------	----	-----------------	--------------

-05, -08,
-10, -12, -13,
-15, -17, -20,
-22, -25
(Call for other sizes)

- "XX.XX"
= Assembled Length
Assembled Length in INCHES (3.1-8")
2 inches minimum

Leave blank for -S and -D End Options.
For -T End Option Specify "-N" (Socket has notch polarization)

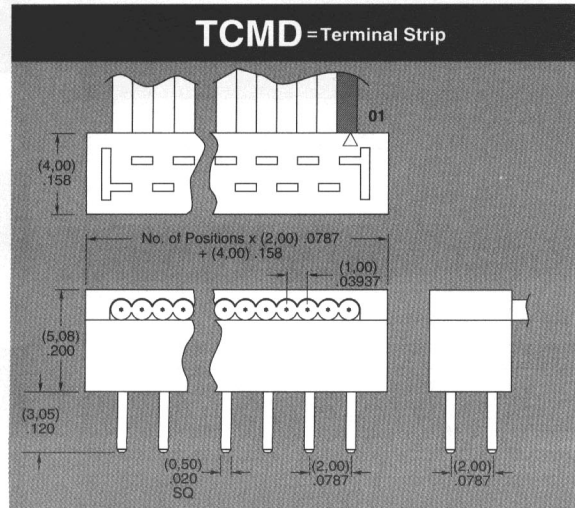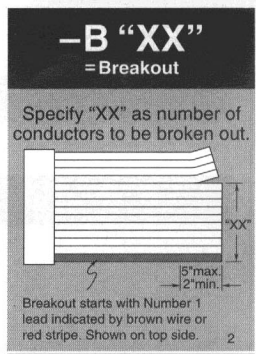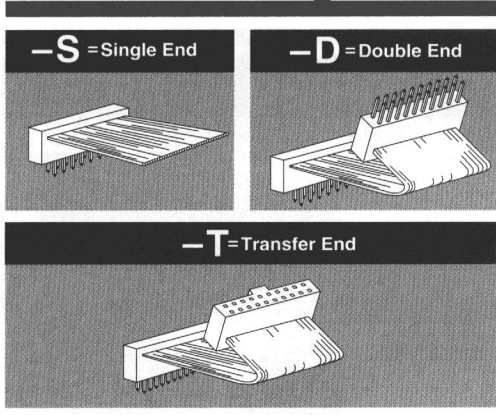

Note: TCMD Series assemblies are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

IDC CABLE