


Legacy NMA2010-A2S 100 kHz to 1000 MHz

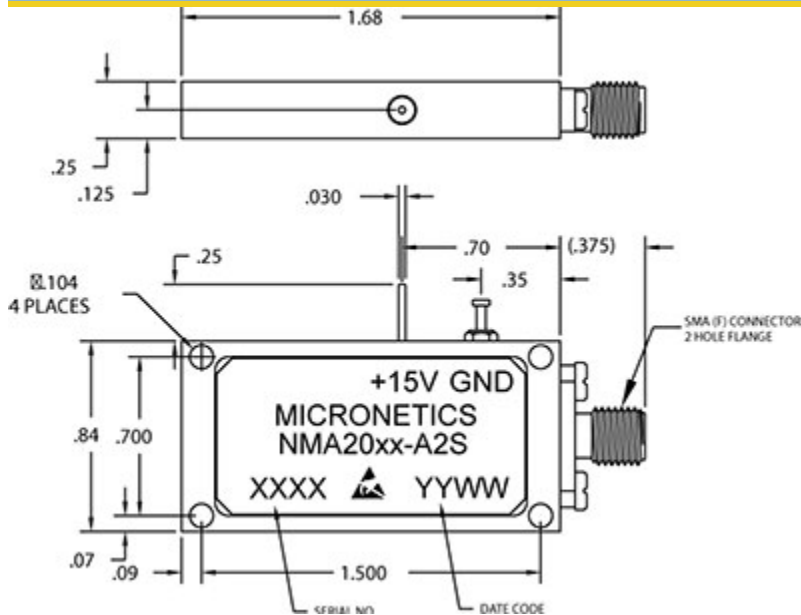

Specifications

RF Frequency	100 kHz to 1000 MHz
Noise Output	57 dB Min ENR
Noise Spectral Density (N_o)	-117 dBm/Hz Min
Flatness	4 dB P-P Max
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	75 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	S Package
Connector Type	SMA(f)

Environmental

Operating Temperature	-55 to 95 °C
Storage Temperature	-65 to 125 °C

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

