

SPECIFICATIONS

Mechanical

Connector Mating Force: 0.4~3.0kgf.
Connector Un mating Force: 0.4~3.0kgf.
Durability: 1500 Cycles.

Electrical


Current Rating: 1A.
Contact Resistance: 50mΩ max.
Dielectric Withstanding Voltage: 500V AC/min.
Insulation Resistance: 100MΩ min.

Physical





Housing: Thermoplastic, UL 94V-0 rated.
Contact: Copper alloy.
Plating: See "ORDERING INFORMATION".
Operating Temperature: -25°C to +85°C.
Recommended Thickness of PCB: 1.57[.062].

Audio Jack Connector

HD Audio Jack Series
Right Angle Type, T/H
2.50mm [.098"] Pitch
8Pos.



DRAWING

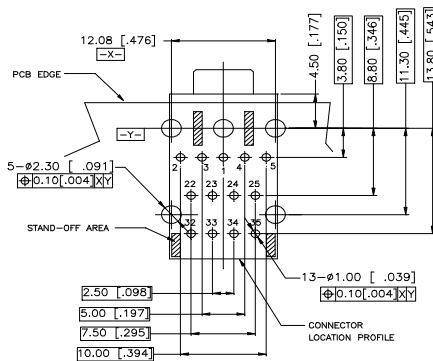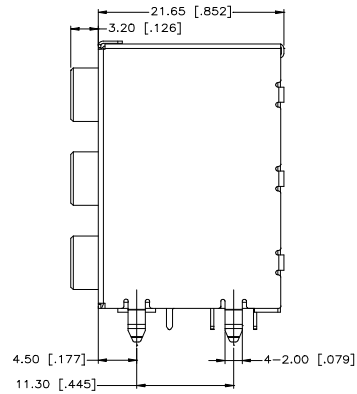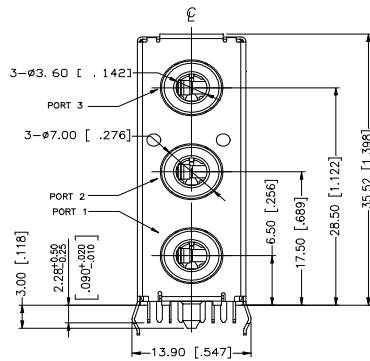

ORDERING INFORMATION

PRODUCT NO.: JA 3 3 3 3 1 - F1*P - 4 H

AUDIO JACK ————
Body Type ————
 3=Triple Jack
Sleeve Type: ————
 3= All plastic cylindrical
Plug Type ————
 3=3 bands
Plug Diameter ————
 3=3.5mm
Halogen Free Code ————
Tray Packing ————
Extension Code ————
Contact Area Gold Plating
 1=Gold Flash

P/N	PORT 1	PORT 2	PORT 3
JA33331-F11P-4H	PINK	LIME	LIGHT BLUE
JA33331-F14P-4H	GRAY	BLACK	ORANGE
JA33331-F13P-4H	LIME	BLUE	PINK
JA33331-F15P-4H	ORANGE	BLACK	GRAY
JA33331-F1CP-4H	PINK	LIGHT BLUE	LIME