

#### **SPECIFICATIONS**

#### Mechanical

Contact Normal Force: 75g min.

Durability: 100 Cycles

Contact Retention Force: 0.45kg min.

#### **Electrical**

Current Rating: 1.0A, 30 Rise above Ambient

Contact Resistance: 30mW max. initial. 40mW max. after Test

**Dielectric Withstand Voltage:** 500V min. at Sea Level **Pin to Pin Insulation Resistance:** 1000MW min.

### **Physical**

Housing: Thermoplastic, UL 94V-0 rated in White Color

Contact: Copper alloy


**Plating: See** "ORDERING INFORMATION" **Operating Temperature:** -40 to +105


## **PCI** Connector


EH Series Vertical Type, T/H 1.27mm [.050"] Pitch 120 Pos.




### **DRAWING**

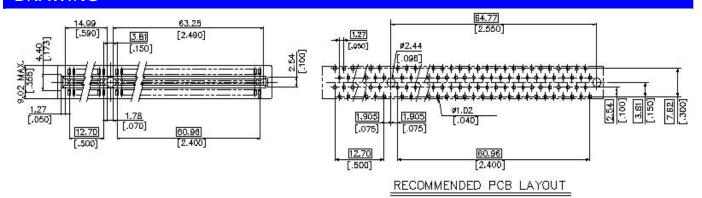

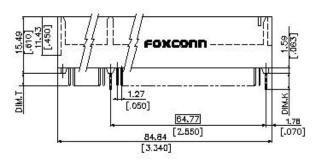



# ORDERING INFORMATION

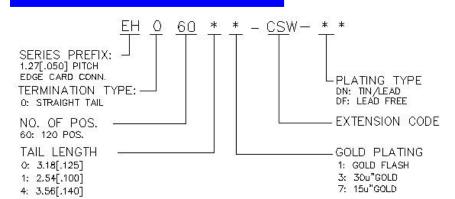

EH0604*-CSW-**	3.56	4.72	2.36±0.13
	[.140]	[.186]	[.093±.005]
EH0601*-CSW-**	2.54	4.52	1.57±0.13
	[.100]	[.178]	[.062±.005]
EH0600*-CSW-**	3.18	4,52	1.57±0.13
	[.125]	[.178]	[.062±.005]
PROD. NO.	DIM.T	DIM,K	PCB THICKNESS