

**SPECIFICATIONS**

**Mechanical**

**Mating Force:** 3.50KG(7.71Lb) max.  
**Unmating Force:** 1.00KG(2.20Lb)~ 3.50KG(7.71Lb)  
**Durability:** 1500Cycles


**Electrical**

**Current Rating:** 1.5A  
**Contact Resistance:** 30mΩ max.  
**Dielectric Withstanding Voltage:** 500V AC/1min min.  
**Insulation Resistance:** 1000MΩ min.


**Physical**

**Housing:** Thermoplastic, UL 94V-0 rated  
**Contact and Shell:** Copper alloy  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** -55°C to +85°C

**UB Series  
 Right Angle,T/H  
 Triple USB Receptacle**



**DRAWING**

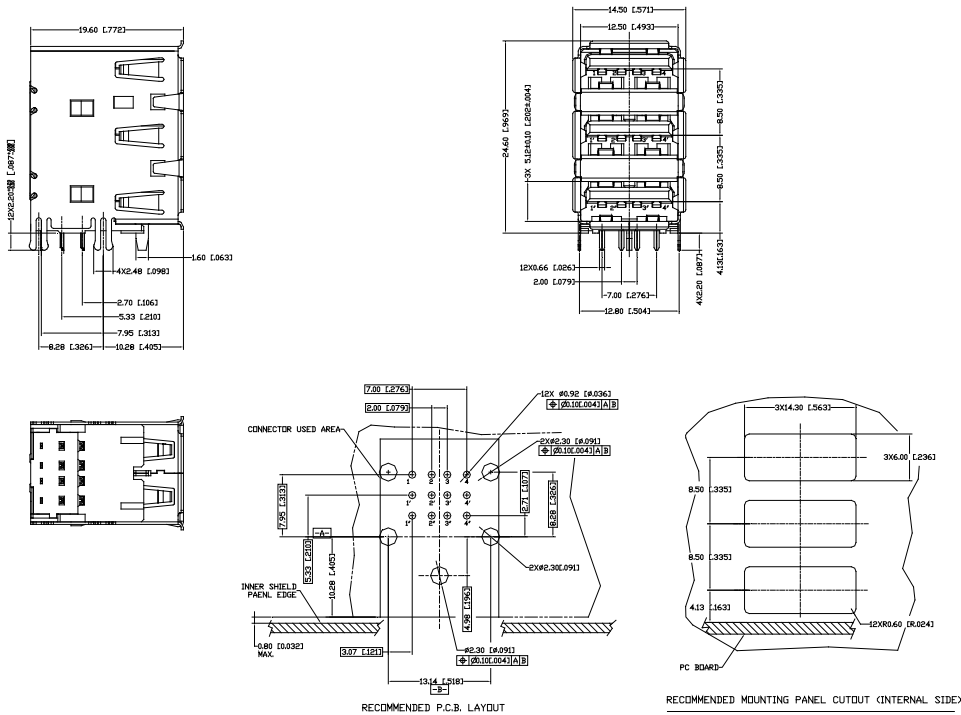

**ORDERING INFORMATION**

