


DETAIL A:

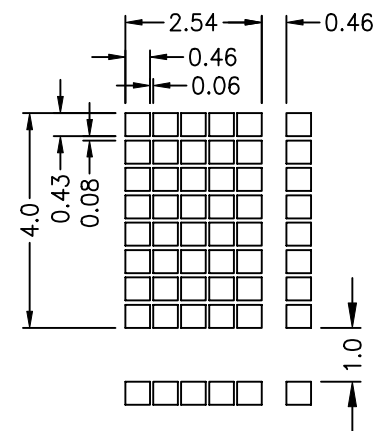

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTE:

- | | |
|----------------------------|--------------------------------|
| 1. DISPLAY TYPE: | STN/YELLOW GREEN |
| 2. VIEWING DIRECTION: | 6: 00 |
| 3. POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4. OPERATING TEMP: | 0°C~+50°C |
| 5. STORAGE TEMP: | -20°C~+60°C |
| 6. LCD OPERATING VOLTAGE: | 4.7V |
| 7. DRIVE METHOD: | 1/16 DUTY 1/5 BIAS |
| 8. BACKLIGHT TYPE: | LED |
| 9. CONTROLLER: | S6A0069X01-COCX(KS0066UP-00CC) |
| 10. UNMARKED TOLERANCE: | ±0.3mm |
| 11. BEZEL IS TO BE PAINTED | BLACK |



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM162YBC6	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	SHEET NO: OF	