

SPECIFICATIONS

Mechanical

Mating Force: 0.142Kgf max. per contact pair Unmating Force: 0.017Kgf min. per contact pair Contact Retention Force: 0.91Kgf min per contact.

Electrical

Current Rating: 1.0A

Contact Resistance: $35m\Omega$ max.

Dielectric Withstanding Voltage: 500V/1min. **Insulation Resistance:** $1000M\Omega$ min, initial.

Physical


Housing: Thermoplastic, UL 94V-0 rated in black Color

Contact: Copper alloy


Plating: See "ORDERING INFORMATION" **Operating Temperature:** -55 $^{\circ}$ C to +85 $^{\circ}$ C

SCSI Serial Connector


QA Series Right Angle, T/H Type 2.54mm [.100] Pitch Stacked 68 Pos.



DRAWING

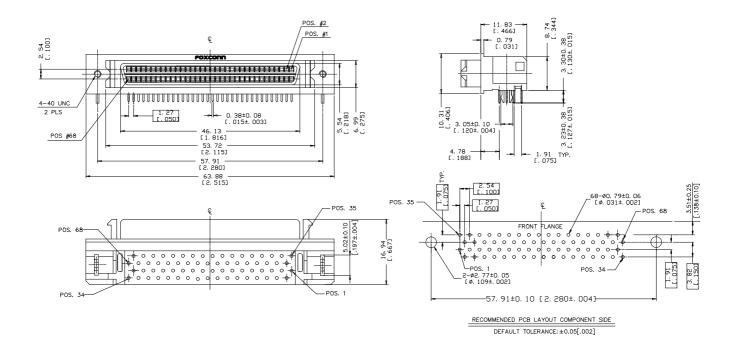

ORDERING INFORMATION

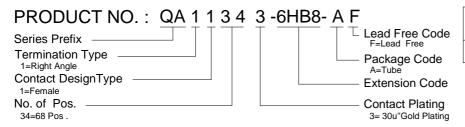

QA11343-6HB8-AF	30u" GOLD PLATING AT CONTACT AREA
P/N	PLATING