

Pomona®

Model 4240 Type "N" Male Terminated Plug

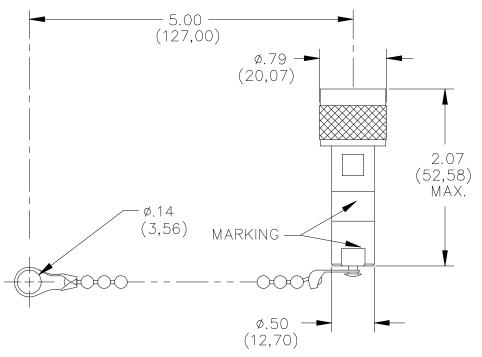



MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Plating. Center Contact: Brass, Gold Plated. Dielectric: Teflon Gasket: Silicone rubber Resistor: Deposited carbon film Marking: "Pomona 4240" Label: "TERM, *Ω 1W"

RATINGS:

Frequency Range: DC to 500 MHz Resistance Tolerance: \pm 1% Power: 1W @ 70°C Max.

ORDERING INFORMATION: Model 4240-*

*= Resistance Value 50, 75, 600 Ordering Example: 4240-50 = 50 Ohm Value Resistance

All dimensions are in inches. Tolerances (except noted): $xx = \pm.02^{\circ}$ (,51 mm), $xxx = \pm.005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS Sales: 909-469-2900 Fax: 909-629-3317 Technical Assistance: 800-241-2060 PomonaACCESS 90237 (800) 444-6785 or (949) 253-3858 More drawings available at www.pomonaelectronics.com Page 1 of 1

 $\label{eq:relation} R:\label{eq:relation} R:\label{eq:relation}$