
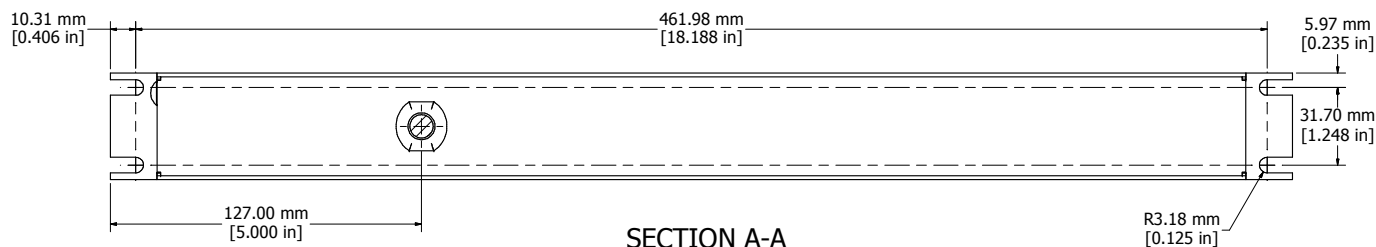


ISOMETRIC VIEW



1582H6**S**	
Finish - Front	- Black Painted Steel
Back	- Black Painted Steel
Rated	- 125 VAC, 60 Hz, 15 Amps
Approvals	- CSA Certified Standards C22.2 (No. 21-95, 42-99) - CSA No. 8-M1986
Surge Specs	- 780 Joules, 54000 Amps Transient Current - Protection in 3 AC Modes (L-N, N-G, L-G)
Colours & Cord Length	
1582H6A1SBK	- Black w/ 6' Foot Power Cord (NEMA 5-15P)
1582H6A1S	- ASA 61 Grey w/ 6' Foot Power Cord (NEMA 5-15P)
1582H6B1SBK	- Black w/ 15' Foot Power Cord (NEMA 5-15P)
1582H6B1S	- ASA 61 Grey w/ 15' Foot Power Cord (NEMA 5-15P)

HAMMOND MANUFACTURING™

1582H6S****

www.hammondmfg.com