

SCHOTTKY BARRIER DIODE

Features

- Low forward current
- High breakdown voltage
- Guard ring protected
- Low diode capacitance.

APPLICATIONS

- Ultra high-speed switching
- Voltage clamping
- Protection circuits.






DESCRIPTION

Planar Schottky barrier diodes with an integrated guard ring for stress protection. Single diodes and double diodes with different pinning are available.

We declare that the material of product compliance with RoHS requirements.

ORDERING INFORMATION

Device	Marking	Shipping
LBAS70LT1G	BE	3000 Tape & Reel
LBAS70LT3G	BE	10000 Tape & Reel
LBAS70-04LT1G	CG	3000 Tape & Reel
LBAS70-04LT3G	CG	10000 Tape & Reel
LBAS70-05LT1G	EH	3000 Tape & Reel
LBAS70-05LT3G	EH	10000 Tape & Reel
LBAS70-06LT1G	GK	3000 Tape & Reel
LBAS70-06LT3G	GK	10000 Tape & Reel

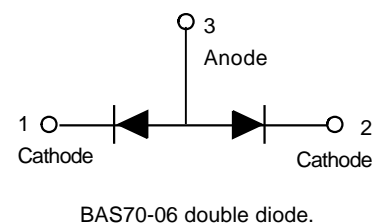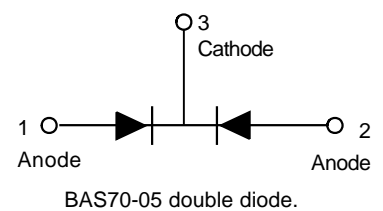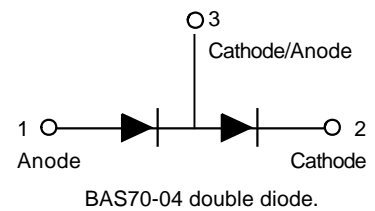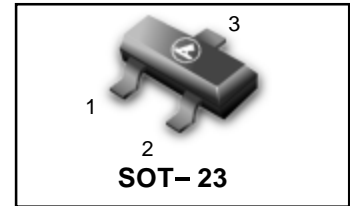

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Max.	Unit	Conditions
Continuous reverse voltage	V_R	–	70	V	
Continuous forward current	I_F	–	70	mA	
Repetitive Peak forward surge current	I_{FSM}	–	70	mA	$t_p \leq 1\text{s}; \delta \leq 0.5$
Non-repetitive peak forward current	I_{FSM}	–	100	mA	$t_p < 10\text{ms}$
Storage temperature	T_{stg}	-65	+150	$^\circ\text{C}$	
Junction temperature	T_j	–	150	$^\circ\text{C}$	
Operating ambient temperature	T_{amb}	-65	+150	$^\circ\text{C}$	

DEVICE MARKING

LBAS70LT1G=BE LBAS70-04LT1G=CG LBAS70-05LT1G=EH LBAS70-06LT1G=GK

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Max.	Unit	Conditions
Forward voltage(Fig.1)	V_F	410	mV	$I_F=1\text{mA}$
		750	mv	$I_F=10\text{mA}$
		1	v	$I_F=15\text{mA}$
Reverse current(Fig.2 ;note1)	I_R	100	nA	$V_R=50\text{V}$
		10	μA	$V_R=70\text{V}$
Charge carrier life time (krakauer method)	τ	100	ps	$I_F=5\text{mA}$
Diode capacitance(Fig.4)	C_d	2	pF	$f=1\text{MHz}; V_R=0$

Note:

1. Pulse test: $t_p=300\mu\text{s}; \delta=0.02$.**THERMAL CHARACTERISTICS**

PARAMETER	SYMBOL	VALUE	UNIT	CONDITIONS
Thermal resistance from junction to ambient	$R_{th\ j-a}$	500	k/w	note1

Note

1. Refer to SOT23 or SOT143B standard mounting conditions.