

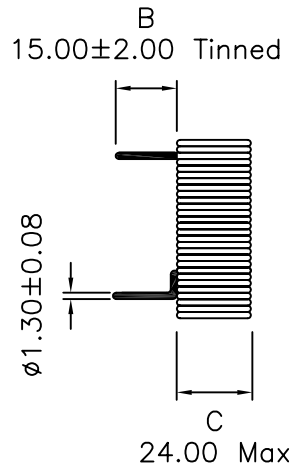



## 1. Mechanical Dimensions:



## 2. Schematic:

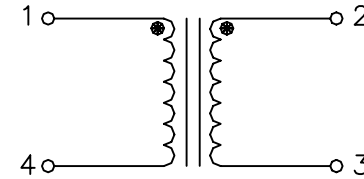

## 3. Electrical Specifications: @25°C

OCL: 1.0mH Min @10KHz 0.1V, Each Wdg

DCR: 20mOhms Max, Each Wdg

Rated Current: 10A (40°C Temp Rise Max)

Hi-pot: 2400Vac for 2 Sec Wdg to Wdg

Rated Voltage: 250VAC/VDC

### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. Lead spacing is uncontrolled.

DOC REV: A/1

<b>XFMRs Inc.</b> <a href="http://www.XFMRS.com">www.XFMRS.com</a>	Title: <b>COMMON MODE CHOKE</b>		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF0013-HOCMC REV. A
SHEET 1 OF 1	DWN.	Juan Mao	Feb-02-12
	APP.	YK Liao	Feb-02-12
	BW		Feb-02-12