



STU309DH


SamHop Microelectronics Corp.

Apr 20 2007

Dual Enhancement Mode Field Effect Transistor (N and P Channel)

PRODUCT SUMMARY (N-Channel)		
V _{DSS}	I _D	R _{DS(ON)} (mΩ) Max
30V	18A	22 @ V _{GS} = 10V
		34 @ V _{GS} = 4.5V

PRODUCT SUMMARY (P-Channel)		
V _{DSS}	I _D	R _{DS(ON)} (mΩ) Max
-30V	-14A	34 @ V _{GS} = -10V
		54 @ V _{GS} = -4.5V

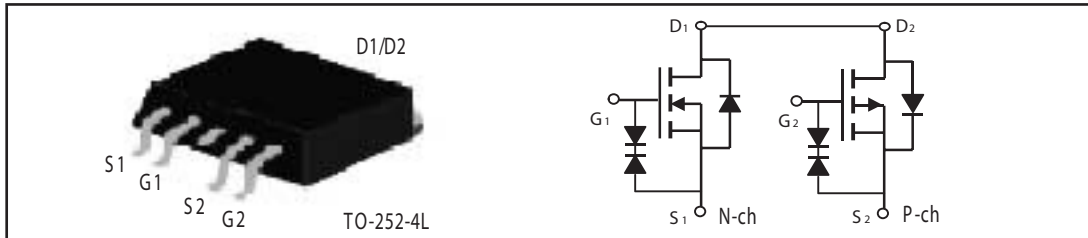

ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Parameter	Symbol	N-Channel	P-Channel	Unit
Drain-Source Voltage	V _{DS}	30	-30	V
Gate-Source Voltage	V _{GS}	±20	±20	V
Drain Current-Continuous @ T _c	I _D	18	-14	A
		15	-12	A
-Pulsed ^a	I _{DM}	50	-50	A
Drain-Source Diode Forward Current	I _S	10	-6	A
Maximum Power Dissipation	P _D	11		W
		7.7		
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to 175		°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction-to-Case	R _{θJC}	13.6	°C/W
Thermal Resistance, Junction-to-Ambient	R _{θJA}	120	°C/W

STU309DH

N-Channel ELECTRICAL CHARACTERISTICS (T_A = 25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D = 250uA	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24V, V _{GS} = 0V			1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±10	uA
ON CHARACTERISTICS^a						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250uA	1	1.8	3	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 10A		16	22	m ohm
		V _{GS} = 4.5V, I _D = 8A		22	34	m ohm
On-State Drain Current	I _{D(ON)}	V _{DS} = 5V, V _{GS} = 4.5V	20			A
Forward Transconductance	g _{FS}	V _{DS} = 10V, I _D = 10A		15		S
DYNAMIC CHARACTERISTICS^b						
Input Capacitance	C _{ISS}	V _{DS} = 15V, V _{GS} = 0V f = 1.0MHz		640		pF
Output Capacitance	C _{OSS}			180		pF
Reverse Transfer Capacitance	C _{RSS}			110		pF
Gate resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1.0MHz		0.5		ohm
SWITCHING CHARACTERISTICS^b						
Turn-On Delay Time	t _{D(ON)}	V _{DD} = 15V I _D = 1 A V _{GS} = 10V R _{GEN} = 6 ohm		13		ns
Rise Time	t _r			12		ns
Turn-Off Delay Time	t _{D(OFF)}			40		ns
Fall Time	t _f			7		ns
Total Gate Charge	Q _g	V _{DS} = 15V, I _D = 20A, V _{GS} = 10V		13		nC
		V _{DS} = 15V, I _D = 20A, V _{GS} = 4.5V		6.8		nC
Gate-Source Charge	Q _{gs}	V _{DS} = 15V, I _D = 20 A		1.5		nC
Gate-Drain Charge	Q _{gd}	V _{GS} = 10V		3.5		nC

STU309DH

P-Channel ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D = -250uA	-30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -24V, V _{GS} = 0V			-1	uA
Gate-Body Leakage	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±10	uA
ON CHARACTERISTICS^a						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250uA	-1	-1.9	-3	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} = -10V, I _D = -6A		27	34	m ohm
		V _{GS} = -4.5V, I _D = -4A		43	54	m ohm
On-State Drain Current	I _{D(ON)}	V _{DS} = -5V, V _{GS} = -10V	-20			A
Forward Transconductance	g _{FS}	V _{DS} = -10V, I _D = -6A		10		S
DYNAMIC CHARACTERISTICS^b						
Input Capacitance	C _{ISS}	V _{DS} = -15V, V _{GS} = 0V f = 1.0MHz		850		pF
Output Capacitance	C _{OSS}			220		pF
Reverse Transfer Capacitance	C _{RSS}			130		pF
Gate resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1.0MHz		4		ohm
SWITCHING CHARACTERISTICS^b						
Turn-On Delay Time	t _{D(ON)}	V _{DD} = -15V I _D = -1A V _{GS} = -10V R _{GEN} = 6 ohm		12		ns
Rise Time	t _r			15		ns
Turn-Off Delay Time	t _{D(OFF)}			75		ns
Fall Time	t _f			35		ns
Total Gate Charge	Q _g	V _{DS} = -15V, I _D = -20A, V _{GS} = -10V		16		nC
		V _{DS} = -15V, I _D = -20A, V _{GS} = -4.5V		8		nC
Gate-Source Charge	Q _{gs}	V _{DS} = -15V, I _D = -20 A		1.6		nC
Gate-Drain Charge	Q _{gd}	V _{GS} = -10V		4.7		nC

STU309DH

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ ^c	Max	Unit
DRAIN-SOURCE DIODE CHARACTERISTICS^b						
Diode Forward Voltage	V_{SD}	$V_{GS} = 0\text{V}, I_S = 10\text{A}$	N-Ch	0.9	1.3	V
		$V_{GS} = 0\text{V}, I_S = -6\text{A}$	P-Ch	-0.9	-1.3	

Notes

a. Pulse Test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2\%$.

b. Guaranteed by design, not subject to production testing.

N-Channel

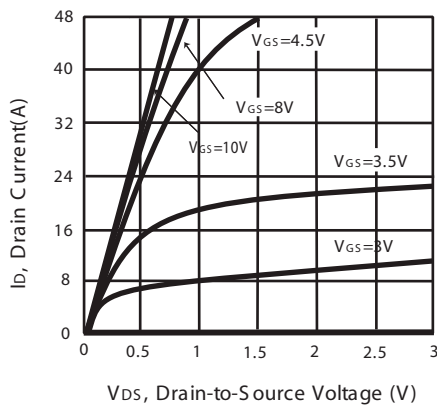


Figure 1. Output Characteristics

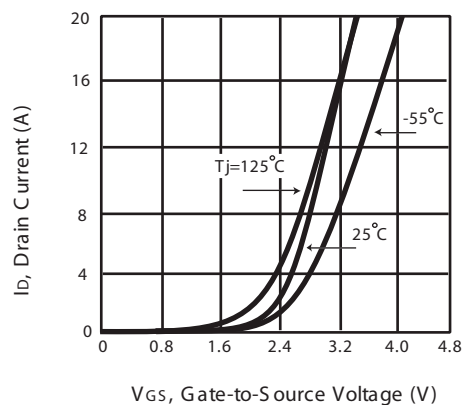


Figure 2. Transfer Characteristics

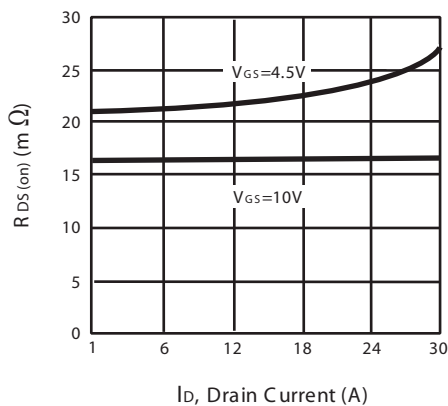


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

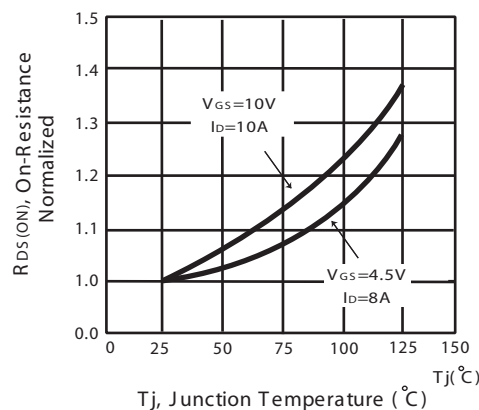


Figure 4. On-Resistance Variation with Drain Current and Temperature

STU309DH

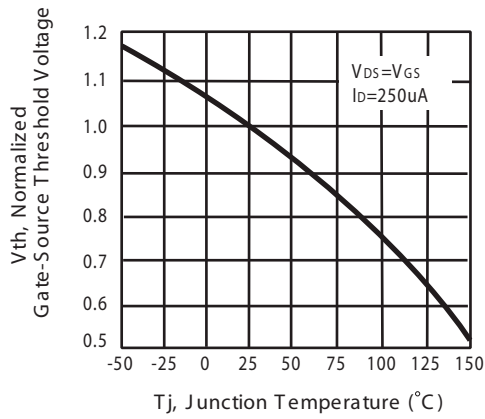


Figure 5. Gate Threshold Variation with Temperature

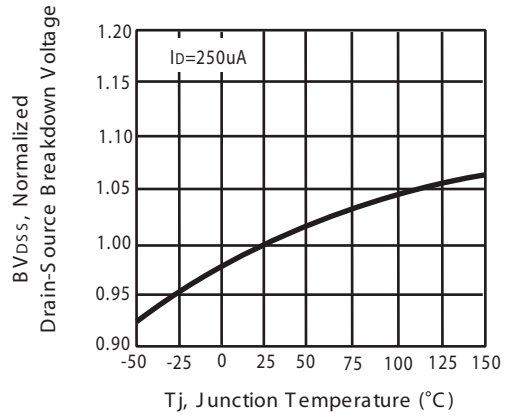


Figure 6. Breakdown Voltage Variation with Temperature

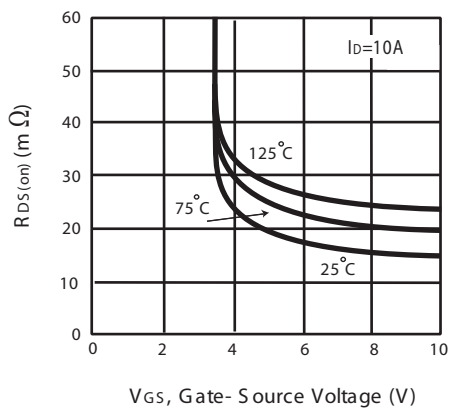


Figure 7. On-Resistance vs. Gate-Source Voltage

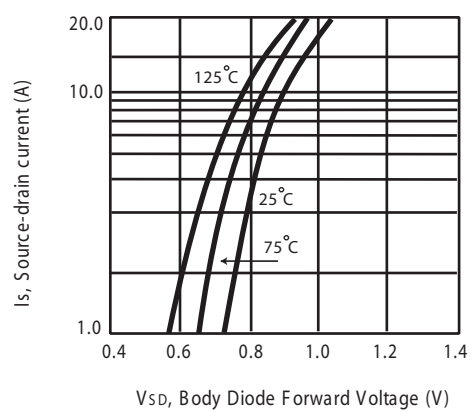


Figure 8. Body Diode Forward Voltage Variation with Source Current

STU309DH

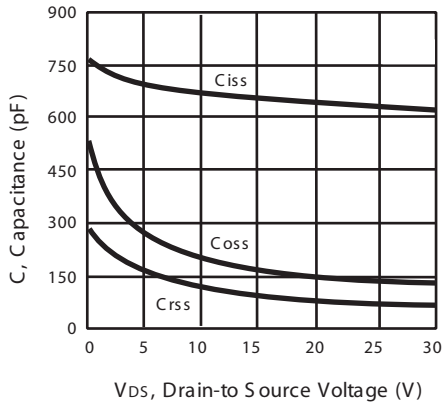


Figure 10. Capacitance

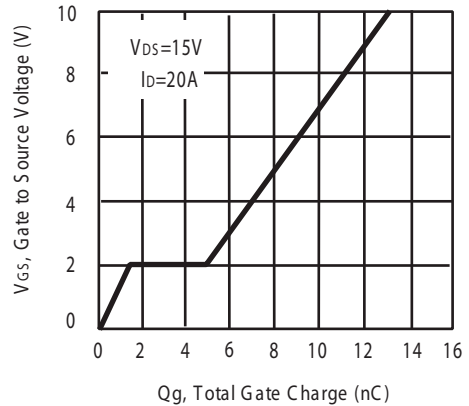


Figure 11. Gate Charge

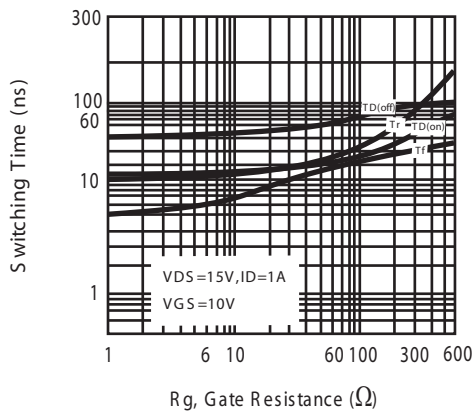


Figure 12. switching characteristics

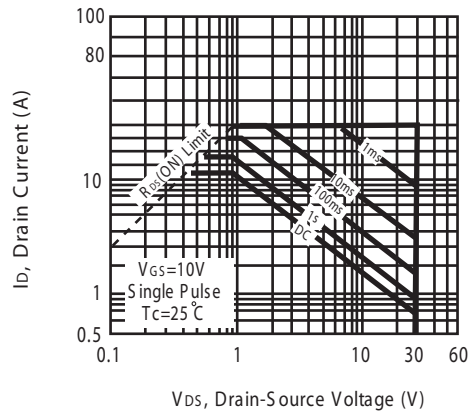


Figure 13. Maximum Safe Operating Area

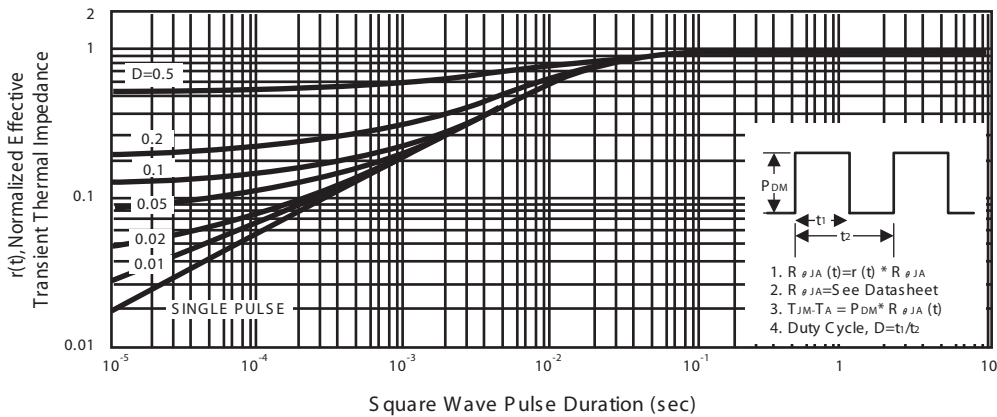


Figure 14. Normalized Thermal Transient Impedance Curve

STU309DH

P-Channel

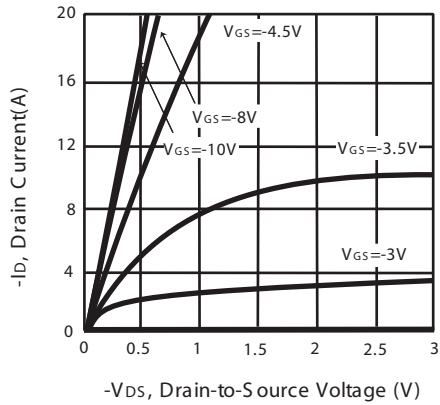


Figure 1. Output Characteristics

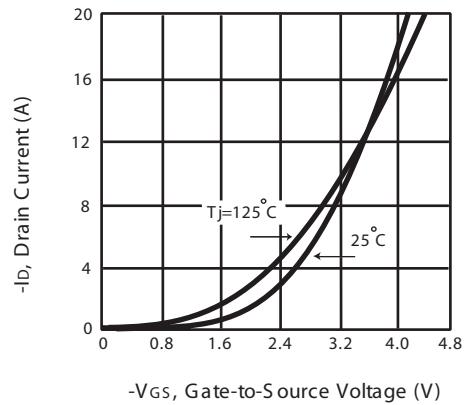


Figure 2. Transfer Characteristics

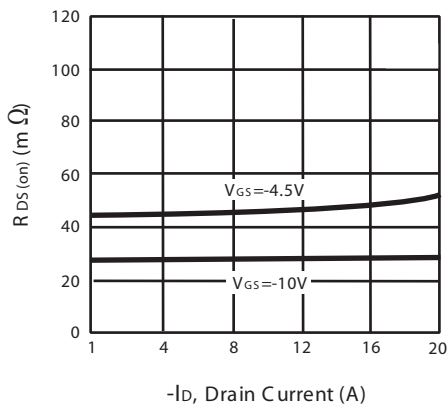


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

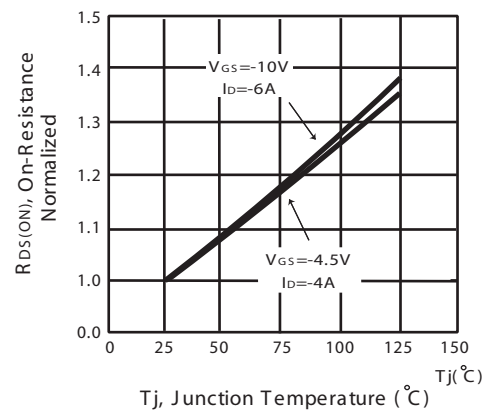


Figure 4. On-Resistance Variation with Drain Current and Temperature

STU309DH

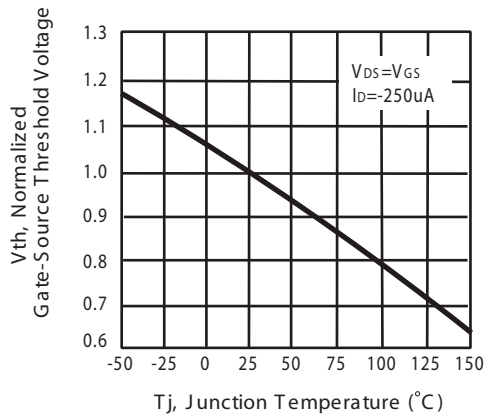


Figure 5. Gate Threshold Variation with Temperature

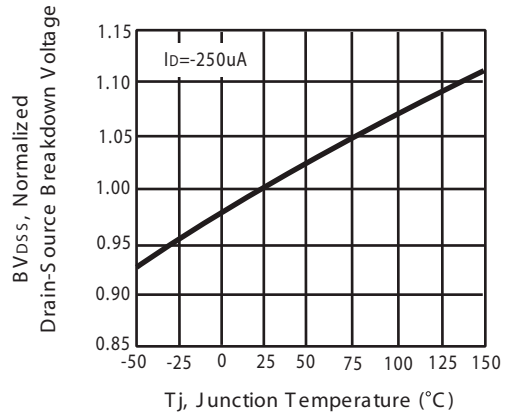


Figure 6. Breakdown Voltage Variation with Temperature

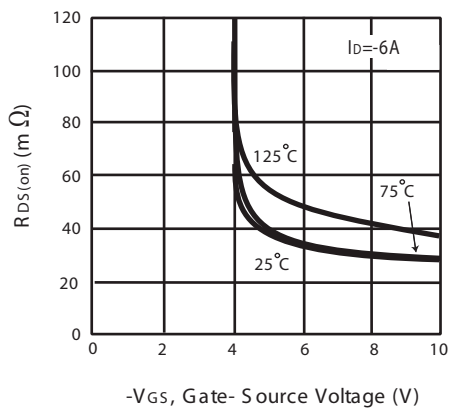


Figure 7. On-Resistance vs. Gate-Source Voltage

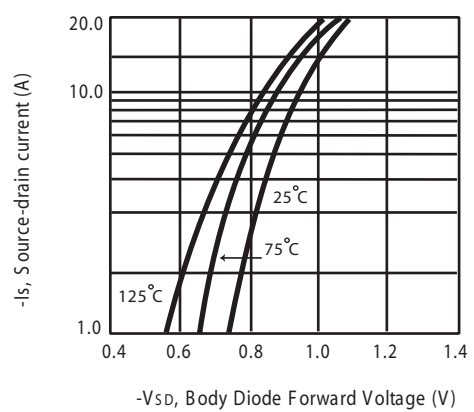


Figure 8. Body Diode Forward Voltage Variation with Source Current

STU309DH

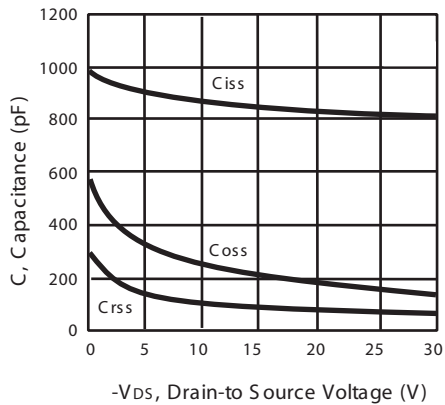


Figure 10. Capacitance

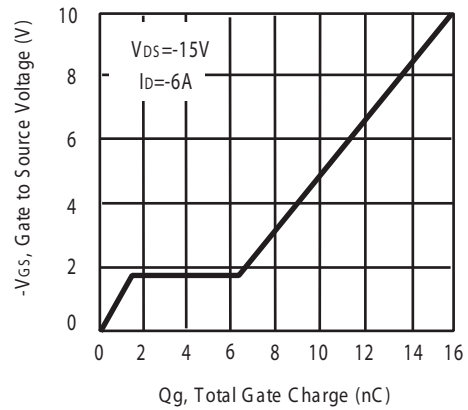


Figure 11. Gate Charge

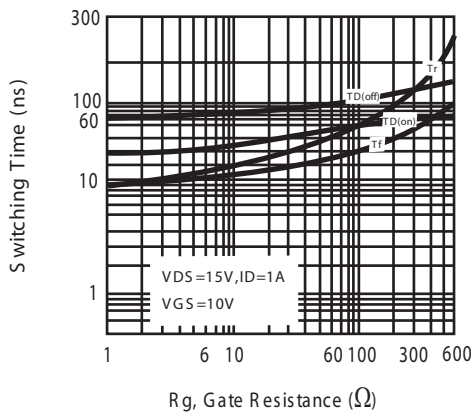


Figure 12. switching characteristics

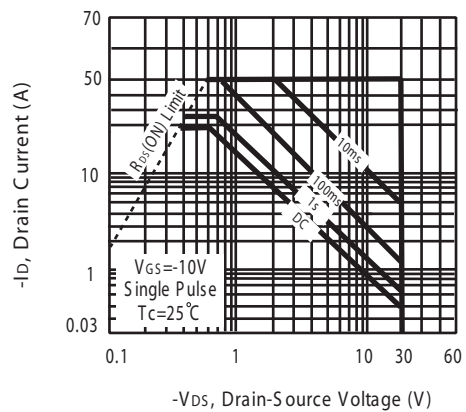


Figure 13. Maximum Safe Operating Area


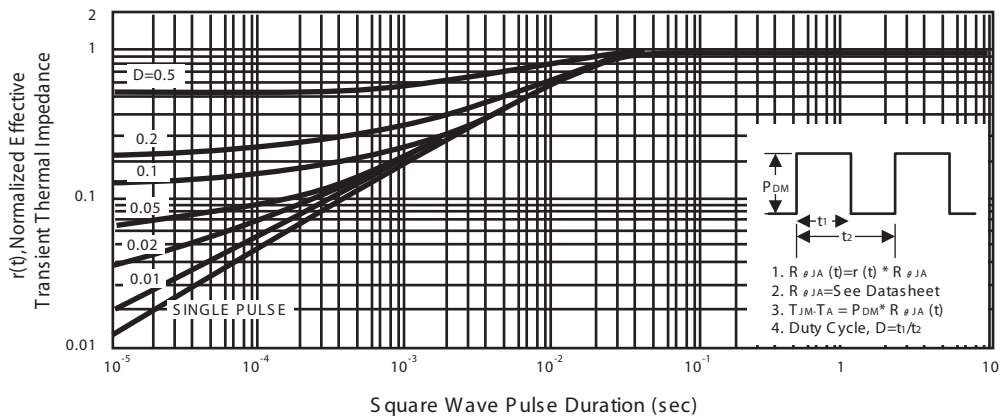


Figure 14. Normalized Thermal Transient Impedance Curve

STU309DH

PACKAGE OUTLINE DIMENSIONS

TO-252-4L

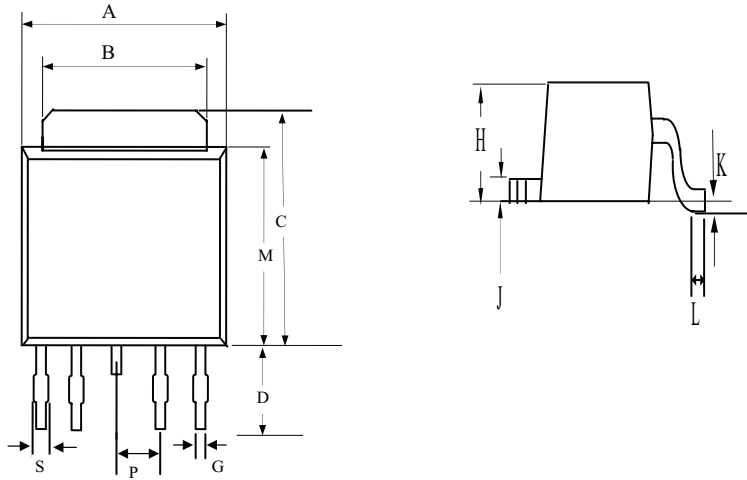


REF .	Millimeters	
	MIN	MAX
A	6.40	6.80
B	5.2	5.50
C	6.80	10.20
D	2.20	3.00
P	1.27 REF.	
S	0.50	0.80
G	0.40	0.60
H	2.20	2.40
J	0.45	0.60
K	0	0.15
L	0.90	1.50
M	5.40	5.80

STU309DH


TO-252-4L Tape and Reel Data

TO-252-4L Carrier Tape

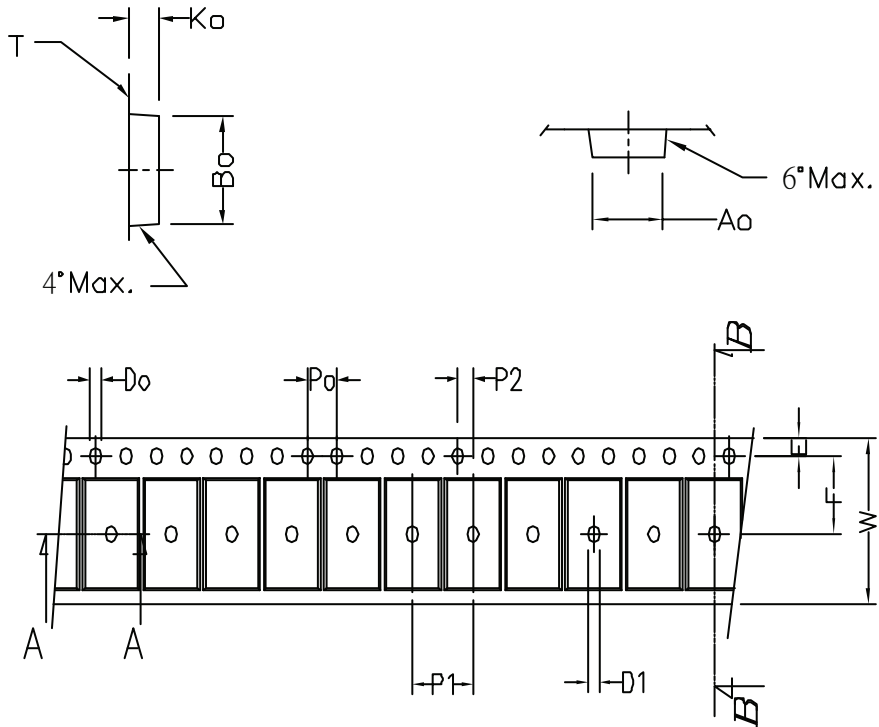

symbol	A_o	B_o	K_o	P_o	P_1	P_2	T
Spec	6.96 ± 0.1	10.49 ± 0.1	2.79 ± 0.1	4.0 ± 0.1	8.0 ± 0.10	2.0 ± 0.05	0.33 ± 0.013
symbol	E	F	D_o	D_1	W	$10P_o$	
Spec	1.75 ± 0.1	7.5 ± 0.05	1.55 ± 0.05	1.5 ± 0.25	16.0 ± 0.3 16.0 ± 0.1	40.0 ± 0.2	

TO-252-4L Reel

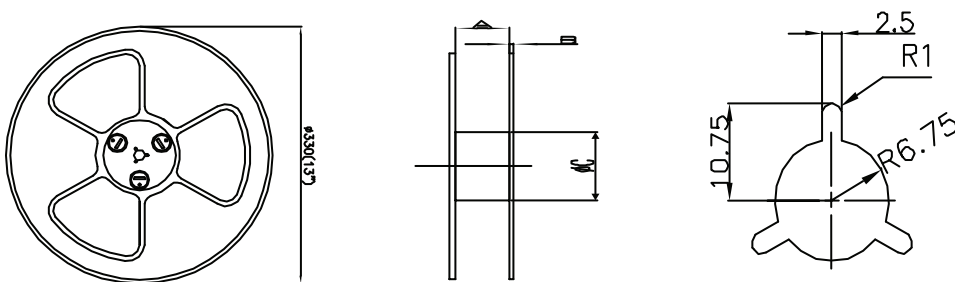

UNIT:mm

Width of carrier tape	8	12	16	24	32	44	56
$A \pm 0.1$	9.4	13.4	17.4	25.4	33.4	45.4	57.4
B	2.3	2.3	2.3	2.3	2.3	2.3	2.3
ϕC	100	100	100	100	100	100	100