

Micro Commercial Components 21201 Itasca Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

DESCRIPTION (300 watt)

This TRANSIENT VOLTAGE SUPPRESSOR (TVS) array is packaged in a SO-8 configuration giving protection to 5 Bidirectional data or interface lines. It is designed for use in applications where protection is required at the board level from voltage transients caused by electrostatic discharge (ESD) as defined in IEC 1000-4-2, electrical fast transients (EFT) per IEC 1000-4-4 and effects of secondary lighting.

These TVS arrays have a peak power rating of 300 watts for an 8/20

µsec pulse. This array is suitable for protection of sensitive circuitry consisting of TTL, CMOS DRAM's, SRAM's, HCMOS, HSIC microprocessors, and I/O transceivers. The SMDAXXC-5 product provides board level protection from static electricity and other induced voltage surges that can damage sensitive circuitry.

FEATURES

- Protects up to 5 Bidirectional lines
- Surge protection Per IEC 1000-4-2, 1000-4-4
- SO-8 Packaging

MAXIMUM RATINGS

- Operating Temperatures: -55^oC to +150^oC
- Storage Temperature: -55°C to +150°C
- Peak Pulse Power: 300 Watts (8/20 μsec, Figure 1)
- Pulse Repetition Rate: <.01%

SMDA03C-5 THRU SMDA24C-5

TVSarrayÔ Series



MECHANICAL

- Molded SO-8 Surface Mount
- Weight: 0.066 grams (approximate)
- Marking: Logo, device number, date code
- Pin #1 defined by DOT on top of package

PACKAGING

- Tape & Reel EIA Standard 481-1-A
- 13 inch reel 2,500, pieces (OPTIONAL)
- Carrier tubes 95 pcs per (STANDARD)

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless otherwise specified

PART NUMBER	DEVICE MARKING	STAND OFF VOLTAGE V _{WM} VOLTS	BREAKDOWN VOLTAGE V _{BR} @1 mA VOLTS MIN	CLAMPING VOLTAGE V _C @ 1 Amp (FIGURE 2) VOLTS MAX	CLAMPING VOLTAGE V _C @ 5 Amp (FIGURE 2) VOLTS MAX	LEAKAGE CURRENT I _D @ V _{WM} µA MAX	CAPACITANCE (f=1 MHz) @0V C pF TYP	TEMPERATURE COEFFICIENT OF V _{BR} á _{VBR} mV/°C
SMDA03C-5	SDL5	3.3	4	7	9	200	300	-5
SMDA05C-5	SDB5	5.0	6.0	9.8	11	40	200	3
SMDA12C-5	SDD5	12.0	13.3	19.0	24	1	75	10
SMDA15C-5	SDF5	15.0	16.7	24.0	30	1	50	13
SMDA24C-5	SDH5	24.0	26.7	43.0	55	1	35	30

NOTE: TVS product is normally selected based on its stand off Voltage V_{WM} . Product selected voltage should be equal to or greater than the continuous peak operating voltage of the circuit to be protected.

Application: The SMDAXXC-5 product is designed for transient voltage suppression protection of ESD sensitive components at the board level. It is an ideal product to be used for protection of I/O Transceivers.

SMDA03C-5 thru SMDA24C-5



WAVE FORMS

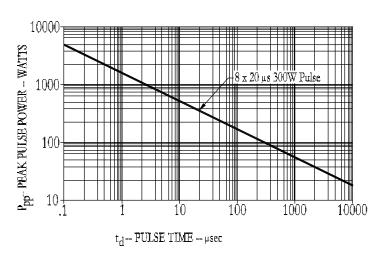


FIGURE 1
Peak Pulse Power Vs Pulse Time




FIGURE 2 Pulse Wave Form

MOUNTING PAD SO-8 0.245 MIN 0.30±.005 0.030±.005

