



## MICROPROCESSOR COMPATIBLE SCHMITT TRIGGER OPTICALLY COUPLED ISOLATOR

### APPROVALS

- UL recognised, File No. E91231

### DESCRIPTION

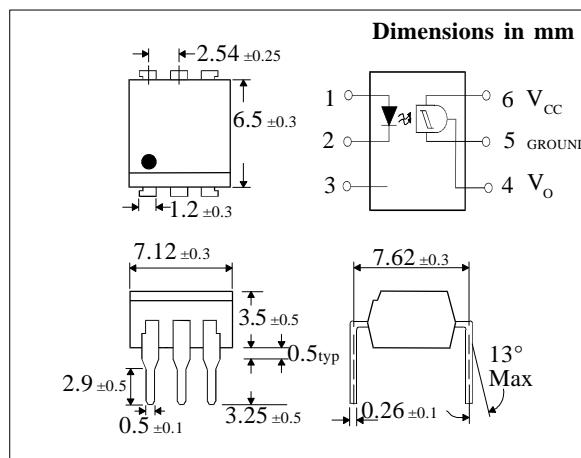
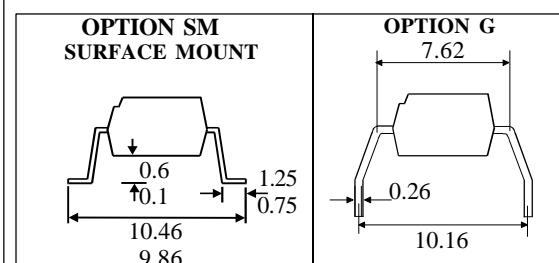
The IS609 is an optically coupled isolator consisting of a Gallium Arsenide infrared emitting diode and a Microprocessor Compatible Schmitt trigger output mounted in a standard 6 pin dual in line package.

### FEATURES

- Options :-  
10mm lead spread - add G after part no.  
Surface mount - add SM after part no.  
Tape&reel - add SMT&R after part no.
- High data rate, 1MHz typical (NRZ)
- Microprocessor compatible drive
- Logic compatible output sinks 16 milliamperes at 0.4 volts maximum
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- High common mode rejection ratio
- Fast switching :  $t_{rise}, t_{fall} = 100\text{nS}$  typical
- Wide supply voltage capability, compatible with all popular logic systems
- Guaranteed On / Off threshold hysteresis

### APPLICATIONS

- Logic to logic isolator
- Line receiver-eliminates noise and transient problems
- Programmable current level sensor
- AC to TTL conversion - square wave shaping
- Digital programming of power supplies
- Interfaces computers with peripherals



### ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	—	-40°C to +125°C
Operating Temperature	—	-25°C to +85°C
Lead Soldering Temperature	—	(1/16 inch (1.6mm) from case for 10 secs) 260°C

### INPUT DIODE

Forward Current, I <sub>F</sub>	—	50mA
Peak forward current	(Pulse width ≤ 100μs, Duty ratio=0.001)—	1A
Reverse Voltage, V <sub>R</sub>	—	6V
Power Dissipation	(derate linearly 1.41mW / °C above 25°C) —	70mW

### OUTPUT DETECTOR

Output Voltage, V <sub>CC</sub>	—	16V
Supply Voltage, V <sub>OH</sub>	—	16V
Output current, I <sub>OL</sub>	—	50mA
Power Dissipation	(derate linearly 2mW / °C above 25°C) —	150mW

### POWER DISSIPATION

Total Power Dissipation	—	170mW
(derate linearly 2.94mW / °C above 25°C) —		

**ISOCOM COMPONENTS LTD**  
Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1YD  
Tel: (01429) 863609 Fax :(01429) 863581

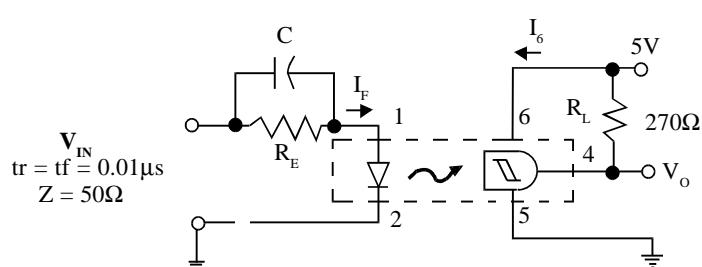
### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ Unless otherwise noted )

	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ ) Forward Voltage ( $V_F$ ) Reverse Current ( $I_R$ ) Capacitance ( $C_J$ )	0.75		1.5 10 100	V V $\mu\text{A}$ pF	$I_F = 0.3\text{mA}$ $I_F = 10\text{mA}$ $V_R = 3\text{V}$ $V = 0, f = 1\text{MHz}$
Output	Operating Voltage Range ( $V_{CC}$ ) Supply Current $I_6$ (off) Output Current High ( $I_{OH}$ )	3	1.6	15 5 100	V mA $\mu\text{A}$	$I_F = 0\text{mA}, V_{CC} = 5\text{V}$ $I_F = 0\text{mA}, V_{CC} = V_O = 15\text{V}$
Coupled	Supply Current $I_6$ (on) Output Voltage, Low ( $V_{OL}$ )  Turn-on Threshold Current $I_F$ (on) Turn-off Threshold Current $I_F$ (off)  Hysteresis Ratio $I_F$ (off) / $I_F$ (on)  Input to Output Isolation Voltage $V_{ISO}$  Turn-on Time Fall Time Turn-off Time Rise Time		1.6	5 0.4 1.6 0.3 0.5 5300 7500	mA V mA mA 0.9 $V_{RMS}$ $V_{PK}$ $\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$	$I_F = 10\text{mA}, V_{CC} = 5\text{V}$ $R_L = 270\Omega, V_{CC} = 5\text{V}$ $I_F = I_{F(on)}$ max  $R_L = 270\Omega, V_{CC} = 5\text{V}$ $R_L = 270\Omega, V_{CC} = 5\text{V}$  $R_L = 270\Omega, V_{CC} = 5\text{V}$  See note 1 See note 1  $R_E = 1200\Omega$ $C = 270\text{pF}$ $f \leq 100\text{kHz}$ $t_p = 1\mu\text{s}$ or greater


Note 1 Measured with input leads shorted together and output leads shorted together.






Note 2 Special Selections are available on request. Please consult the factory.

### SWITCHING CHARACTERISTICS



SWITCHING TEST CIRCUIT

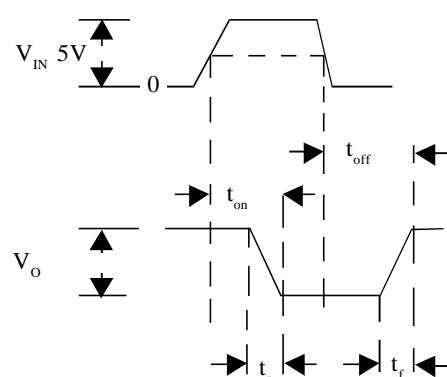

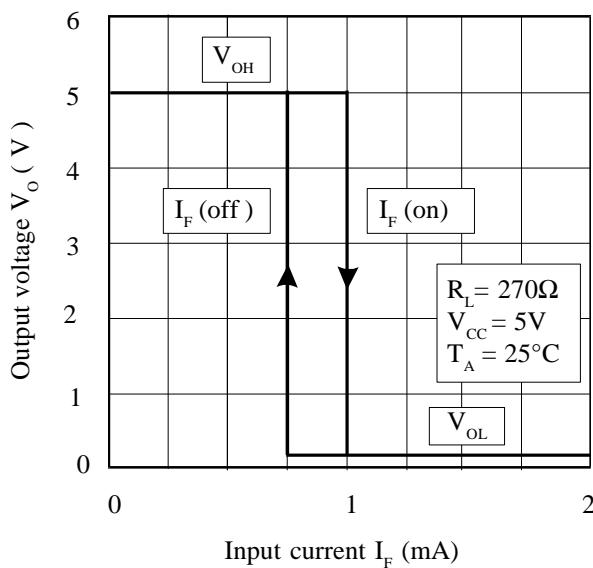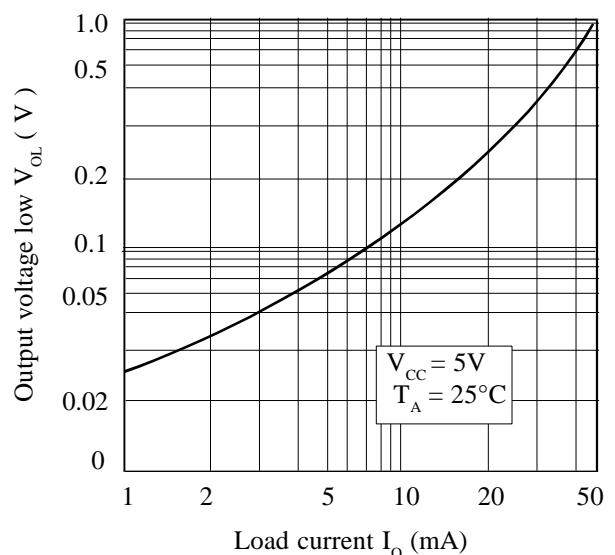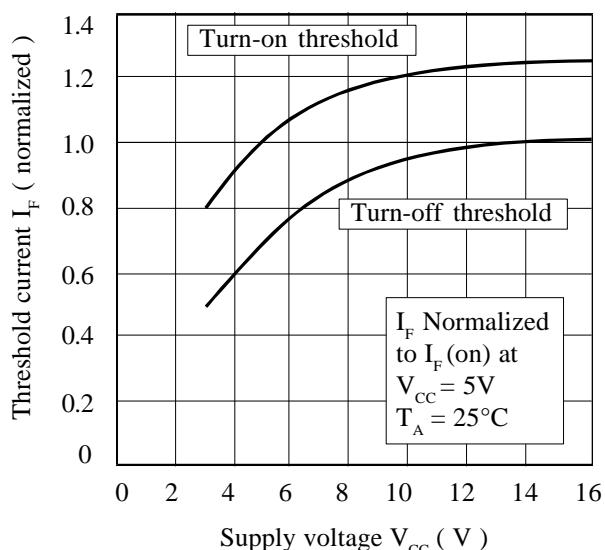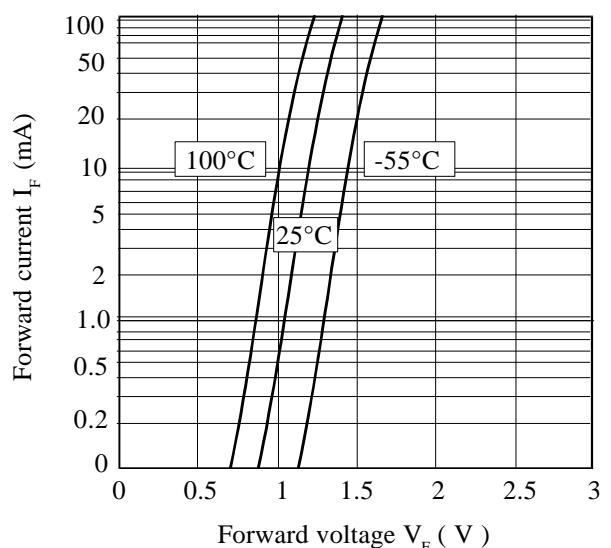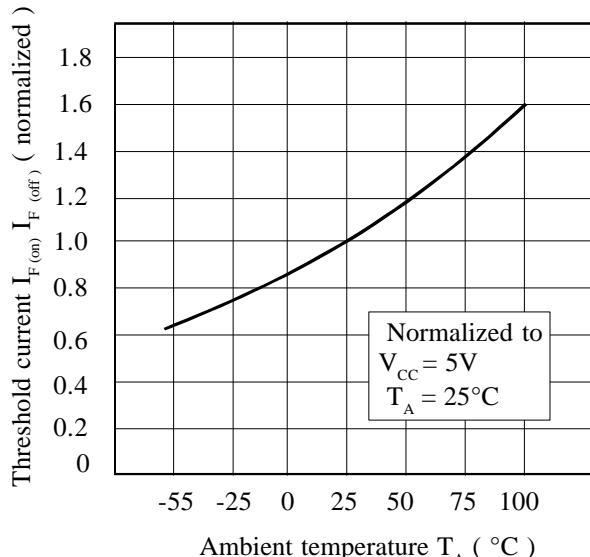**Transfer Characteristics****On Voltage vs. Load Current****Threshold Current vs. Supply Voltage****Forward Voltage vs. Forward Current****Threshold Current vs. Ambient Temperature****Supply Current vs. Supply Voltage**