


Features:

- → Beryllia base for good thermal conduction
- ♦ Regulation temperature from 40°C to 100°C
- ◆ Electrically isolated from the case
- ◆ Epoxy sealed
- Hermetically sealed and military screened units available

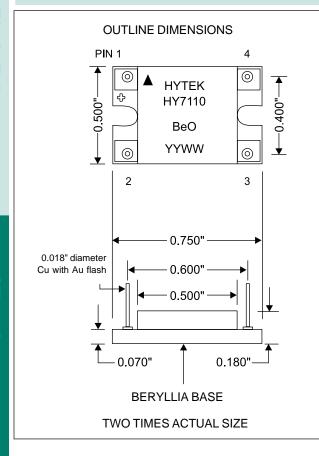

Miniature Proportionally Controlled Heater

Description:


The HY7110 is a miniature proportionally controlled heater whose temperature can be programmed with a single external resistor. This device is ideally suited for regulating the temperature of sensitive electronic components such as microwave filters, optical waveguides, multiplexers and crystal oscillators. The HY7110 in a ceramic package can supply up to 28 Watts of power from an unregulated 28 Volt supply.


Maximum ratings:


Rating	Symbol	Value	Unit
Supply Voltage	Vdd	35	Vdc
Reverse Voltage	VR	-50	Vdc
Power Dissipation	Po	35	Watts
Operating Temperature (Case)	TMAX/MIN	100/–20	℃
Storage Temperature Range		-65 to +150	°C


Operating characteristics:


Characteristic	Symbol	Min	Max	Unit
Supply Voltage (Pin 1 to Pin 2)	VDD	+8	+35	Vdc
Steady State Supply Current @ VDD = +35 Vdc	I _s	0.015	1.0	Adc
Temperature variation over operating voltage	$\Delta T_{_{ m V}}$		2	∞
Temperature variation with load	ΔT_{L}		10	∞
Control Temperature Range	T _C	50	100	℃
Control Resistor Value Pin 3 to Pin 4 (See Figure 1)	R _C	0	35K	Ω
Maximum Control Temperature when $Rc = 0\Omega$	T _{MAX}		110	℃
Turn on power at start-up @VDD = +28 Volts	P _D	25	28	Watts

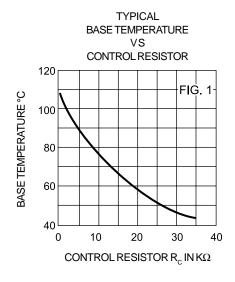


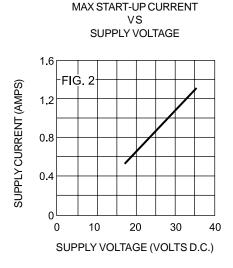

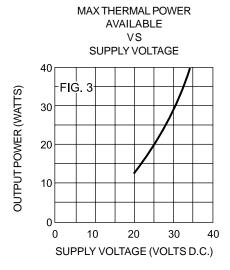

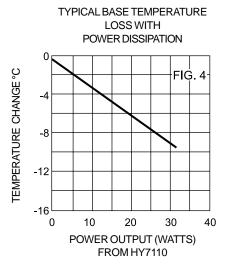

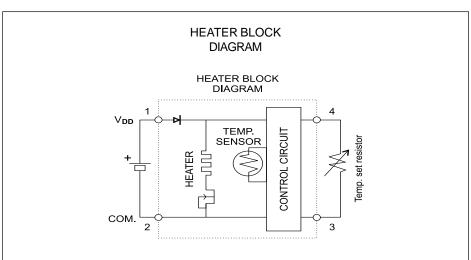

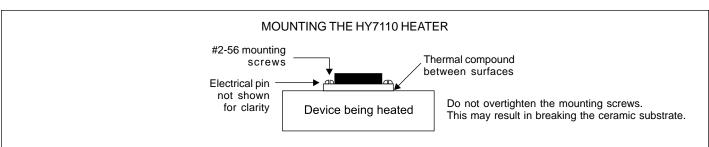

NOTES:

- 1. Optimum heat transfer between the HY7110 and the device being heated occurs when a thermal compound, such as Dow Corning 340, is applied to the mounting surface of the heater.
- 2. Operation is possible from 100 °C to 120°C, however electrical performance is not guaranteed.
- 3. Special environmental and electrical screening is available on request.
- 4. Special custom engineered micro-heater available on request.