

WJ103

A Division of Circuit Interruption Technology, Inc.

Distributor: Electro-Stock www.electrostock.com Tel: 630-682-1542 Fax: 630-682-1562

FEATURES:

- Low coil power consumption
- **High Sensitivity** •
- Conforms to FCC part 68
- PC board mounting
- Small size, light weight





12.5 x 7.5 x 10.0 mm

CONTACT DATA

Contact Arrangement	1A = SPST N.O.
	1C = SPDT
Contact Rating	0.5A @ 125VAC, Resistive, 100K Cycles
	1A @ 30VDC, Resistive, 100K Cycles
	0.3A @ 60VDC, Resistive, 100K Cycles
Contact Resistance	< 50 milliohms initial
Contact Material	Ag + Au
Maximum Switching Power	30W
Maximum Switching Voltage	125VAC, 60VDC
Maximum Switching Current	2 Amps

COIL DATA

Coil VoltageCoil ResistanceVDC $\Omega \pm 10\%$		Pick Up Voltage VDC (max)	Release Voltage VDC (min)	Coil Power W	Operate Time ms	Release Time ms			
			75%	10%					
Rated	Max.	.15W	.20W	of rated voltage	of rated voltage				
3	3.9	60	45	2.25	0.3			1.5	
5	6.5	167	125	3.75	0.5				
6	7.8	240	180	4.50	0.6	.15	4.5		
9	11.7	540	405	6.75	0.9	.20	4.5		
12	15.6	960	720	9.00	1.2				
24	31.2	3840	2880	18.00	2.4				

CAUTION:

- 1. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.
- 2. Pickup and release voltages are for test purposes only and are not to be used as design criteria.

GENERAL DATA

100K cycles, typical
5M cycles, typical
100MΩ min @ 500VDC
1500V rms min. @ sea level
1000V rms min. @ sea level
100m/s ² for 11ms
3.30mm double amplitude 10-40Hz
5N
-40 °C to + 85 °C
-40 °C to + 155 °C
230 °C \pm 2 °C $$ for 10 \pm 0.5s
2.2g




Distributor: Electro-Stock www.electrostock.com Tel: 630-682-1542 Fax: 630-682-1562


ORDERING INFORMATION

1. Series:	WJ103	1C	12VDC	.20	S
WJ103					
2.Contact Arrangement: 1A = SPST N.O. 1C = SPDT					
3. Coil Voltage: 3VDC 5VDC 6VDC 9VDC 12VDC 24VDC					
4.Coil Power: .15 = .15 W .20 = .20 W					
5. Sealed: S = Sealed (standard)					

DIMENSIONS (Units = mm)



SCHEMATICS & PC LAYOUT (BOTTOM VIEWS)

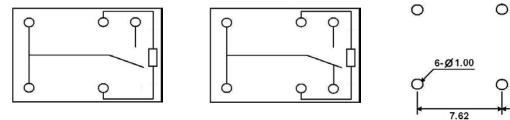

1A

1C

0

2.54

5.08