

# Ceramic Balun RF Transformer

50Ω 680 to 1050 MHz

## TCN1-10+ TCN1-10



### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input RF Power**	5W

\*\* derate linearly to 2.5 W at 100°C

### Pin Connections

PRIMARY DOT	4
PRIMARY(GND)	2,5
SECONDARY DOT	1
SECONDARY	6
NOT USED	3


### Outline Drawing

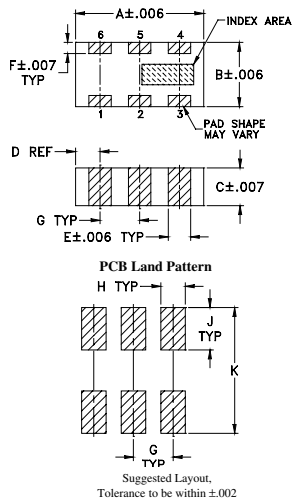

### Outline Dimensions (Inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

### Demo Board MCL P/N: TB-287 Suggested PCB Layout (PL-163)

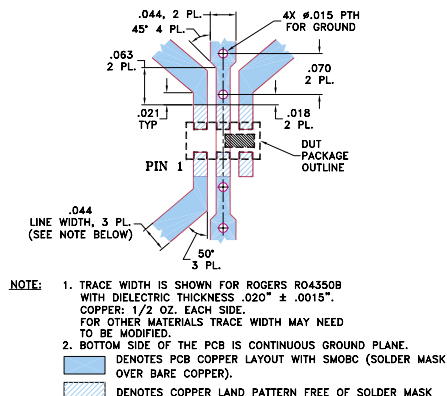

### Features

- wideband, 680 to 1050 MHz
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

### Applications

- TDMA, CDMA
- GSM
- PDC
- WAN
- TACS
- AMPS, NAMPS

### Electrical Specifications (T<sub>AMB</sub>=25°C)

Ω RATIO	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE † (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
1	680-1050	0.9	4.0	0.7
	800-900	0.7	1.0	0.25


\* Insertion Loss is referenced to mid-band loss, 0.6 dB

† Relative to 180°


### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
680.00	0.64	14.50	0.76	6.82
700.00	0.66	14.07	0.65	5.94
750.00	0.72	13.10	0.39	3.94
800.00	0.77	12.43	0.15	2.29
850.00	0.83	11.83	0.08	0.97
900.00	0.89	11.36	0.29	0.23
950.00	0.95	10.99	0.49	1.01
990.00	1.00	10.71	0.64	1.48
1000.00	1.01	10.64	0.68	1.54
1050.00	1.07	10.39	0.85	1.78


TCN1-10  
INSERTION LOSS

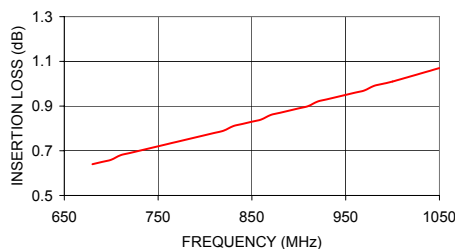


TCN1-10  
AMPLITUDE UNBALANCE

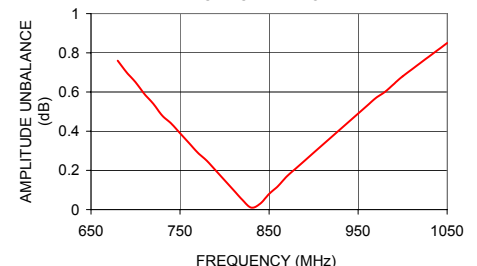

TCN1-10  
PHASE UNBALANCE

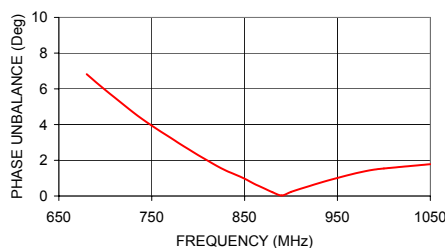

configuration G



**Mini-Circuits**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. B  
M102713  
TCN1-10  
ED-11687/1  
DJ/RS/CP/AM  
070724