Knob Operating Type Potentiometer Without Knob Type

RK08H Series



Compact type potentiometer suitable for volume and tone controls.

Rotary Potentiometers

Slide Potentiometers



■ Typical Specifications

<u> </u>				
Items	Specifications			
Total resistance tolerance	± 30%			
Maximum operating voltage	50V AC 20V DC(Single-unit only)			
Total rotational angle	200 ± 10 °			
Operating life	Without detent 10,000cycles With detent 5,000cycles			
Operating temperature range	- 10 to + 60			

Metal Shaft

Insulated Shaft

Knob Operating

Product Line


Number of resistor elements	Mounting direction	Length of the shaft (mm)	Center detent	Total resistance (k)	Resistance taper	Soldering	Minimum order unit (pcs.)	Products No.	Drawing No.
	50			RK08H11100U3					
		1	Without	10	1B	Manual		RK08H11100UD	1
	Vertical type	1		100				RK08H11100XC	
Single unit			With	100	Manual	100	RK08H1110A04		
Single-unit		4.5	VVILII	10	15A	Reflow		RK08H11100X7	2
	Back-to-back mounting type		Without	50	15C			RK08H1120030	3
	Vertical			10	1B		1,000	RK08H113003Q	4
		Vertical	rtical		50	IB	nellow	1,000	RK08H113003G
	type	1		50	15A	Manual	100	RK08H12100GP	1
Dual un't				10	15C			RK08H12100F3	
Dual-unit	Back-to-back mounting type			50	15A			RK08H122005A	3
	Vertical type				15C	Reflow	1,000	RK08H123002K	4

Notes

- 1. Products other than those listed in above products are also available. Please contact us for details.
- 2. Dip soldering can be applied to the above products. For dip soldering applications, specify separately as "dip soldering applicable product." Back-to-back mounting types are excluded.
- 3. We recommend print boards with a thickness of 0.8mm to 1.2mm. For 1.6mm thickness board applications, please contact us.

■ Dimensions(Vertical Type)

Unit:mm

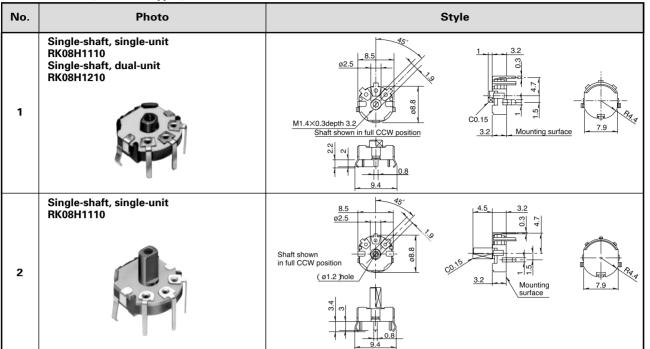

Rotary Potentiometers

Slide Potentiometers


Metal Shaft

Insulated Shaft Knob

Operating

PC Board Mounting Hole Details

Unit:mm

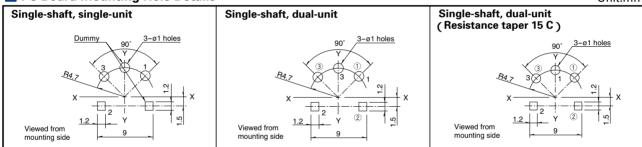


Dimensions(Back-to-back Mounting Type)

Unit:mm

	ilelisiolis back-to-back Mounting Typ	Onit.mi
No.	Photo	Style
3	Single-shaft, single-unit RK08H1120 Single-shaft, dual-unit RK08H1220	M1.4×0.3depth 3.2 Shaft shown in full CCW position Mounting surface 3.2 Mounting surface 3.2

PC Board Mounting Hole Details

Unit:mm

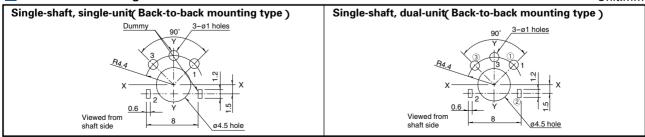

Note


Keep the DUMMY terminal open in the circuit.

Rotary Potentiometers

Slide Potentiometers


Metal Shaft Insulated Shaft Knob

Operating

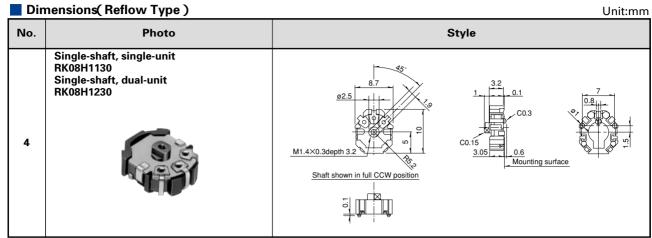


■ PC Board Mounting Hole Details

Unit:mm

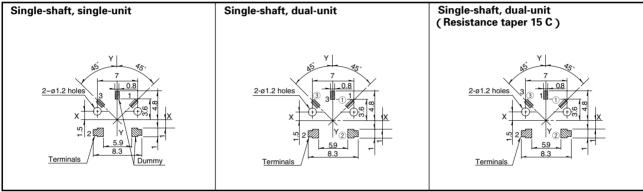

Standard Specification Circuit Diagram

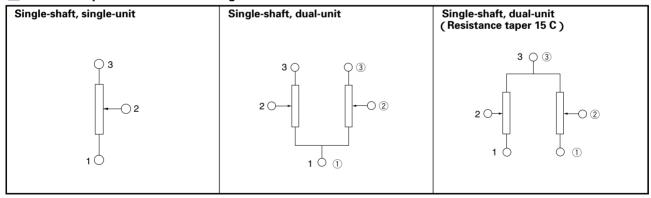

Note

Keep the DUMMY terminal open in the circuit.

Product Varieties

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

■ Total Resistance Variety

Total resistance (K) 5 10 20 50	Total resistance(k)	5	10	20	50	100
-----------------------------------	---------------------	---	----	----	----	-----

Resistance Taper

|--|


Rotary Potentiometers

Slide Potentiometers

Orders Other Than Recommended Products

When ordering product varieties that are not listed in the Product Line, please specify by referring to the below example.

Sample Part Number



100

Model type

Code	Model type
111	Single-unit Vertical type
112	Single-unit Back-to-back mounting type
113	Single-unit Reflow type
121	Dual-unit Vertical type
122	Dual-unit Back-to-back mounting type
123	Dual-unit Reflow type

Metal Shaft

Insulated Shaft

Knob Operating

Length of the shaft(mm)

Code	Length of the shaft
F1	1
F4	4.5

^{*} Only 1mm types are provided with the M1.4 tap screws.


Detent


Code	Center detent
C0	Without
C1	With

^{*}Detent can only be specified for non-reflow single-unit types.

Resistance taper

Code	Resistance taper	Code	Resistance taper
Α	15A	С	15C
В	1B	٧	3B





Total resistance

Code	Total resistance (kΩ)	Code	Total resistance ($k\Omega$)
502	5	503	50
103	10	104	100
203	20		

Note

marked are specifications recommended by ALPS.

^{*} Reflow soldering cannot be applied in the 4.5 mm type.

List of Varieties

Туре			Withou	ıt knob		With	th knob							
		Model	RK08H1 1 RK08H1 2	RK08H1 3	RK10J1 E	RK10J1 R	RK14J1 A	RK14J1 R						
Items			Vertical back-to-back mounting	Reflow type	Insertion type	Reflow type	Insertion type	Reflow type						
		Photo			0									
Rated power 0.03W														
Rated power 0.03W Insulation resistance 100M min. 100V DC Voltage proof 100V AC(for 1minute)														
Voltage proof			100V AC(for 1minute)											
	Strength of the	Stopper strength	0.1N·m 70mN·m											
operating section Push-pull strength (In vertical direction against the P.W.B. surface)			10N max. 5N max.											
Vibration			10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z and for 2 hours respectively											
perfor		Manual soldering			350 ma:	x. 3s max.								
Mechanical performance	Solder heat resistance	Dip soldering				260 ± 5 4 ± 1s								
								Reflow soldering		Please see P.398		Please see P.398		Please see P.398
P Cold			- 10 ± 2 for 96h			- 25 ± 2	for 240h							
performance Damp heat			70 ± 2 for 96h 70 ± 2 for 240h					for 240h						
Damp heat 40 ± 2 , 90 to 95%RH for 96h														
		Page	39	90	394									

■ Maximum Attenuation or Residual Resistance

Application of non-standard

Nominal total resistance	Maximum attenuation	Nominal total resistance	Residual resistance	
R 100k	90dB min.	100k R 50k	0.1% or less of nominal total resistance	
100k > R 50k	80dB min.	50k > R > 10k	30 or less	
50k > R 10k	70dB min.	10l. D	20 or less	
10k > R	60dB min.	10k R		

Note

Contact us separately when you require reflow type taping specifications.

Rotary Potentiometers

Slide Potentiometers

Metal Shaft

Insulated Shaft


> Knob Operating

Soldering Conditions

Soldering Conditions

1. Recommended reflow conditions

Rotary Potentiometers Slide Potentiometers

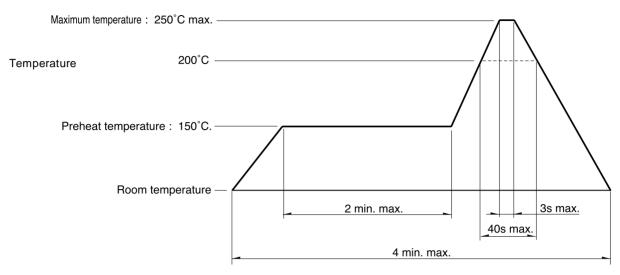

Metal Shaft

Insulated Shaft

Knob

2. Cleaning Cleaning should not be attempted.

3. Type of solder to be used Use cream solder that contains 10 - 15 %wt flux.

4. Soldering Mounting plate should also be soldered.

Notes

- 1. When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
- 2. The temperatures given above are the maximum temperatures at the terminals of the potentiometer when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the potentiometer may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the potentiometer does not rise to 250°C or greater.
- 3. Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.

Operating