ANADIGICS

AWT6136

450 MHz CDMA 3.4V/29.5dBm


Linear Power Amplifier Module
Data Sheet - Rev 2.0

FEATURES

- InGaP HBT Technology
- High Efficiency 37% CDMA
- Low Receive Band Noise (NRx) -132 dBm/Hz @ 10 MHz offset
- Low Leakage Current (<5 μA)
- · SMT Module Package
- 50 Ω Input and Output Matching
- · Shut Down and Mode Control
- CDMA 2000 1XRTT Compliant
- RoHS Compliant Package 250 °C MSL-3

APPLICATIONS

 CDMA/EVDO 450 MHz Wireless Handsets and Data Devices



PRODUCT DESCRIPTION

The AWT6136 is a high power, high efficiency amplifier module for CDMA wireless handset applications. The device is manufactured on an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability and ruggedness. A low power mode is available to reduce power drain on the

system battery. The 6 mm x 6 mm x 1.5 mm laminate package is self contained, incorporating 50 Ω input and output matching networks optimized for output power, linearity, and efficiency.




Figure 1: Block Diagram




Figure 2: Pinout (X-ray Top View)

Table 1: Pin Description

PIN	NAME	DESCRIPTION	
1	Vcc	Supply Voltage	
2	RFℕ	RF Input Signal	
3	V_{REF}	Reference Voltage	
4	V _{MODE}	Mode Control	
5	Vcc	Supply Voltage	
6	RFout	RF Output	
7	GND	Ground	

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	MAX	UNIT
Supply Voltage (Vcc)	0	+5	٧
Mode Control Voltage (VMODE)	0	+3.4	٧
Reference Voltage (VREF)	0	+3.4	٧
RF Input Power (Pℕ)	1	+10	dBm
Storage Temperature (Tstg)	-40	+150	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Table 3: Operating Ranges

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Operating Frequency (f)	450	-	460	MHz	
Supply Voltage (Vcc)	+3.2	+3.4	+4.2	٧	
Reference Voltage (V _{REF})	+2.80 0	+2.90	+3.1 +0.5	V	PA"on" PA"shut down"
Mode Control Voltage (V _{MODE})	+2.5 0	+2.90	+3.1 +0.5	V	Low Bias Mode High Bias Mode
RF Output Power (Pout)	+29.0 (1)	+29.5	-	dBm	CDMA, Vcc =+3.4V
Case Temperature (Tc)	-10	-	+90	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Notes:

(1) For operation at Vcc = +3.2 V and $Tc = +90 \,^{\circ}\text{C}$, Pout is derated by 0.5 dB.



Table 4: Electrical Specifications – CDMA Operation (T_c = +25 °C, V_{cc} = +3.4 V, V_{REF} = +2.90 V, 50 Ω system)

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Gain	26 25	28.5 27.5	30 29	dB	POUT = +29.5 dBm, VMODE = 0 V POUT = +16 dBm, VMODE = +2.90 V
Gain Variation	-	0.4	1.0	dB	
Adjacent Channel Power at ±885 kHz offset ⁽¹⁾ Primary Channel BW = 1.23 MHZ Adjacent Channel BW = 30 kHz	1 1	-50 -58	-47 -47	dB	Pout = +29.5 dBm, VMODE = 0 V Pout = +16 dBm, VMODE = +2.90 V
Adjacent Channel Power at ±1.98 MHz offset (1) Primary Channel BW = 1.23 MHZ Adjacent Channel BW = 30 kHz	1 1	-62 -68	-59 -59	dB	Pout = +29.5 dBm, VMODE = 0 V Pout = +16 dBm, VMODE = +2.90 V
Power-Added Efficiency (1), (2)	33 6	37 7	1 1	%	POUT = +29.5 dBm, VMODE = 0 V POUT = +16 dBm, VMODE = +2.90 V
Quiescent Current (lcq)	-	60	75	mA	through Vcc pins, VMODE = +2.90 V
Reference Current	-	6.5	9	mA	through VREF pin, PA "on"
Mode Control Current	-	0.8	1.0	mA	through VMODE pin, VMODE = +2.90 V
Leakage Current	-	<1	5	μΑ	Vcc = +4.2 V, VREF = 0 V, VMODE = 0 V
Noise in Receive Band	-	-132	-130	dBm/Hz	fo +10 MHz, Ро∪т <u><</u> +29.5 dВm
Harmonics 2fo 3fo, 4fo	1 1	-36 -44	-30 -35	dBc	Pουτ <u><</u> +29.5 dBm
Input Impedance	-	-	2:1	VSWR	
Spurious Output Level (all spurious outputs)	-	-	-70	dBc	Pout ≤ +29.5 dBm In-band Load VSWR < 5:1 Out-of-band Load VSWR < 10:1 Applies over all operating ranges
Load mismatch stress with no permanent degradation or failure	10:1	-	-	VSWR	Applies over all operating ranges

Notes:

⁽¹⁾ Pout is derated by 0.5 dB for IS-98 / CDMA 2000 operation.

⁽²⁾ Efficiency spec applies at 455 MHz.

APPLICATION INFORMATION

To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site: http://www.anadigics.com

Shutdown Mode

The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to both the V_{REF} and V_{MODE} voltages.

High Bias Mode

The power amplifier may be placed in a high bias mode by applying a logic low level (see Operating Ranges table) to the V_{MODE} voltage.


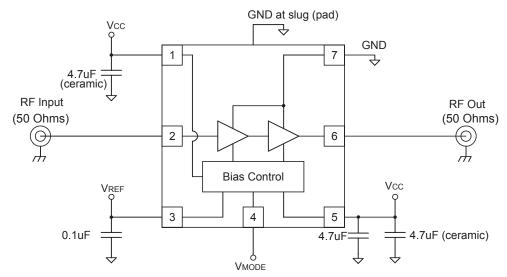



Figure 3: Application Circuit Schematic

PACKAGE OUTLINE

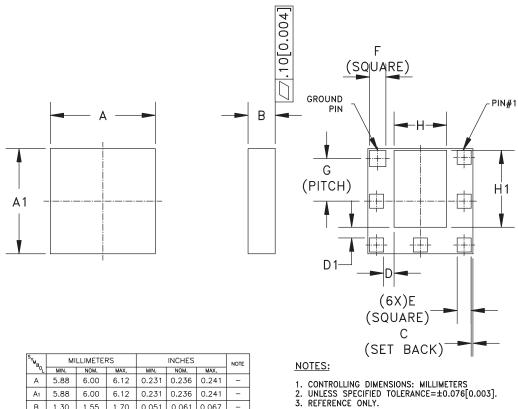

MILLIMETERS MILLIMETERS MIN. NOM. MAX.			RS		NOTE		
-0 _L	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
Α	5.88	6.00	6.12	0.231	0.236	0.241	-
Αı	5.88	6.00	6.12	0.231	0.236	0.241	-
В	1.30	1.55	1.70	0.051	0.061	0.067	-
С	-	0.10	-	-	0.004	-	-
D	-	0.60	-	-	0.024	_	-
D1	-	0.60	-	-	0.024	-	-
Ε	-	0.81	-	-	0.032	-	-
F	-	0.89	-	-	0.035	-	-
G	2	2.50 BSC		0.	.098 BS	С	3
Н	-	3.00	-	-	0.118	-	-
Hı	-	4.39	-	-	0.173	-	-

Figure 4: M5 Package Outline - 7 Pin 6 mm x 6 mm x 1.5 mm Surface Mount Module (Low Band)



NOTES:

1. ANADIGICS LOGO SIZE: X=0.080±0.010 Y=0.095±0.010

2. PART #: AWT 6136

3. YEAR AND WORK WEEK: YYWW: YY = YEAR, WW = WORK WEEK

4. LOT - Wafer I.D.: LLLLL-SS = Wafer/Lot I.D.5. PIN 1 INDICATOR: MOLD NOTCH -or- INK DOT

BBB 6. BOM #:

7. COUNTRY CODE: CCCCCC

8. TYPE : ELITE SIZE : AS LARGE AS POSSIBLE COLOR : WHITE OF SILVER INK MARKED

Figure 5: Branding Specification



NOTES:

1. ANADIGICS LOGO SIZE: X=0.080±0.010 Y=0.095±0.010

2. PART #: AWT6136R

3. YEAR AND WORK WEEK: YYWW: YY = YEAR, WW = WORK WEEK

4. LOT - Wafer I.D.: LLLLL-SS = Wafer/Lot I.D.
5. PIN 1 INDICATOR: MOLD NOTCH -or- INK DOT

6. BOM #: BBB
7. COUNTRY CODE: CCCCCC

8. TYPE : ELITE
SIZE : AS LARGE AS POSSIBLE
COLOR : WHITE or SILVER INK MARKED

Figure 6: RoHS Compliant Branding Specification

COMPONENT PACKAGING

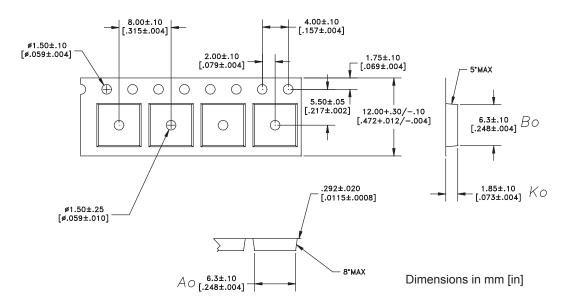


Figure 6: Tape & Reel Packaging

Table 5: Tape & Reel Dimensions

PACKAGE TYPE	SE TYPE TAPE WIDTH POCKET PITC		REEL CAPACITY	MAX REEL DIA
6 x 6 x 1.5 mm	12mm	8mm	2500	13"

ORDERING INFORMATION

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWT6136RM5P8	-10 °C to +90 °C	RoHS Compliant 7 Pin 6 x 6 x 1.5 mm Surface Mount Module	Tape and Reel, 2500 pieces per Reel
AWT6136RM5P9	-10 °C to +90 °C	RoHS Compliant 7 Pin 6 mm x 6 mm x 1.5 mm Surface Mount Module	Partial Tape and Reel



ANADIGICS, Inc.

141 Mount Bethel Road Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000 Fax: +1 (908) 668-5132

URL: http://www.anadigics.com E-mail: Mktg@anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.

