



#### **Features**

- Ultra-Small Surface Mount Package
- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance
- Lead Free/RoHS Compliant (Note 3)
- "Green" Device (Notes 4 and 5)

#### **Mechanical Data**

- Case: SOT-523
- Case Material: Molded Plastic, "Green" Molding Compound, Note 5. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe)
- Polarity: See Diagram
- Marking Information: See Page 2
- Ordering Information: See Page 2
- Weight: 0.002 grams (approximate)

SOT-523





TOP VIEW Internal Schematic

### Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic		Symbol	Value	Unit	
Repetitive Peak Reverse Voltage		V <sub>RRM</sub>	250	V	
Working Peak Reverse Voltage DC Blocking Voltage		V <sub>RWM</sub> V <sub>R</sub>	200	V	
RMS Reverse Voltage		V <sub>R(RMS)</sub>	141	V	
Forward Continuous Current (Note 1)		I <sub>FM</sub>	400	mA	
Average Rectified Output Current (Note 1)		lo	200	mA	
Non-Repetitive Peak Forward Surge Current	@ t = 1.0µs @ t = 1.0s	I <sub>FSM</sub>	2.5 0.5	А	
Repetitive Peak Forward Surge Current		I <sub>FRM</sub>	625	mA	

### **Thermal Characteristics**

Characteristic	Symbol	Value	Unit	
Power Dissipation (Note 1)	PD	150	mW	
Thermal Resistance Junction to Ambient (Note 1)	R <sub>0JA</sub>	833	°C/W	
Operating and Storage Temperature Range	TJ, TSTG	-65 to +150	°C	

### Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	V <sub>(BR)R</sub>	250		V	I <sub>R</sub> = 100μA
Forward Voltage	V <sub>F</sub>		1.0 1.25	V	I <sub>F</sub> = 100mA I <sub>F</sub> = 200mA
Reverse Current @ Rated DC Blocking Voltage (Note 2)	I <sub>R</sub>	_	100 15		$T_J = 25^{\circ}C$ $T_J = 100^{\circ}C$
Total Capacitance	CT		5.0	pF	$V_{R} = 0, f = 1.0MHz$
Reverse Recovery Time	t <sub>rr</sub>		50	ns	I <sub>F</sub> = I <sub>R</sub> = 30mA, I <sub>rr</sub> = 0.1 x I <sub>R</sub> , R <sub>L</sub> = 100Ω

1. Device mounted on FR-4 PC board with recommended pad layout, which can be found on our website at Notes:

http://www.diodes.com/datasheets/ap02001.pdf.


2. Short duration pulse test used to minimize self-heating effect.

3. No purposefully added lead.

 Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.
Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb<sub>2</sub>O<sub>3</sub> Fire Retardants.





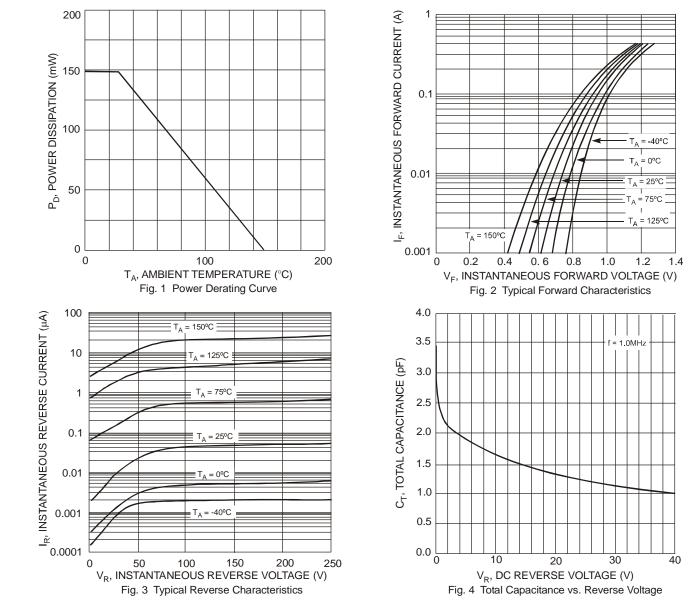

## Ordering Information (Notes 5 & 6)

Part Number	Case	Packaging		
BAS21T-7-F	SOT-523	3000/Tape & Reel		


Notes: 6. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

## **Marking Information**


Date Code Key				 ТЗҮІ 		YM = Date	uct Type M e Code Ma ex: N = 20 n (ex: 9 = S	rking 02)				
Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	М	Ν	Р	R	S	Т	U	V	W	Х	Y	Z
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	0	N	D



# **Package Outline Dimensions**

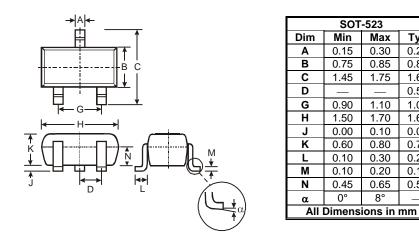

# **Suggested Pad Layout**

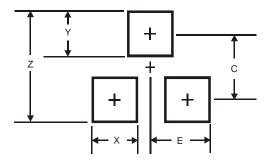

Value (in mm)
1.8
0.4
0.51
1.3
0.7

Тур

0.22

0.80

1.60

0.50

1.00

1.60

0.05

0.75

0.22

0.12

0.50

#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.