


# Fast Recovery Rectifier

## 1N3879 - 1N3883

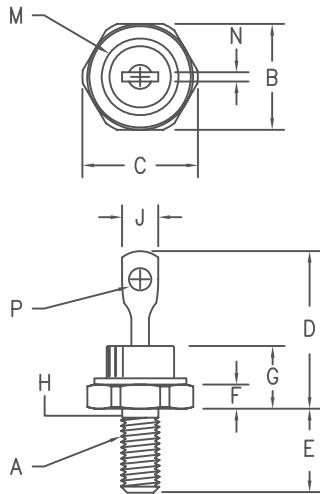

Notes:

1. 10-32 UNF3A threads
2. Full threads within 2 1/2 threads
3. Standard Polarity: Stud is Cathode  
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	---	.800	---	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.90	4.44	
G	---	.405	---	10.29	
H	.163	.189	4.14	4.80	2
J	---	.250	---	6.35	
M	---	.424	---	10.77	Dia.
N	.020	.065	.510	1.65	
P	.060	---	1.52	---	Dia.

D0203AA (D04)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
1N3879*	50V	50V	
1N3880*	100V	100V	
1N3881*	200V	200V	
1N3882*	300V	200V	
1N3883*	400V	400V	

\*Add Suffix R For Reverse Polarity

- Fast Recovery Rectifier
- 175°C Junction Temperature
- V<sub>RRM</sub> 100 to 400 Volts
- 6 Amps Current Rating

### Electrical Characteristics

Average forward current	I <sub>F(AV)</sub> 6 Amps	T <sub>C</sub> = 100°C, Square wave, R <sub>θJC</sub> = 2.0°C/W
Maximum surge current	I <sub>FSM</sub> 200 Amps	8.3 ms, half sine T <sub>C</sub> = 100°C
Max peak forward voltage	V <sub>FM</sub> 1.40 Volts	I <sub>FM</sub> = 20A T <sub>J</sub> = 25°C*
Max peak reverse current	I <sub>RM</sub> 3 mA	V <sub>RRM</sub> , T <sub>J</sub> = 150°C
Max peak reverse current	I <sub>RM</sub> 15 μA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Max reverse recovery time	t <sub>RR</sub> 200 ns	I <sub>F</sub> = 1A dc, V <sub>R</sub> = 30V, di/dt = 25A/μs, T <sub>C</sub> = 55°C
Typical junction capacitance	C <sub>J</sub> 115 pF	V <sub>R</sub> = 10V, f = 1Mhz, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>TG</sub>	-65°C to 175°C
Operating junction temp range	T <sub>J</sub>	-65°C to 150°C
Max thermal resistance	R <sub>θJC</sub>	2.0°C/W Junction to case
Mounting torque		12-15 inch pounds
Weight		.16 ounces (5.0 grams)

# 1N3879 — 1N3883

Figure 1  
Typical Forward Characteristics

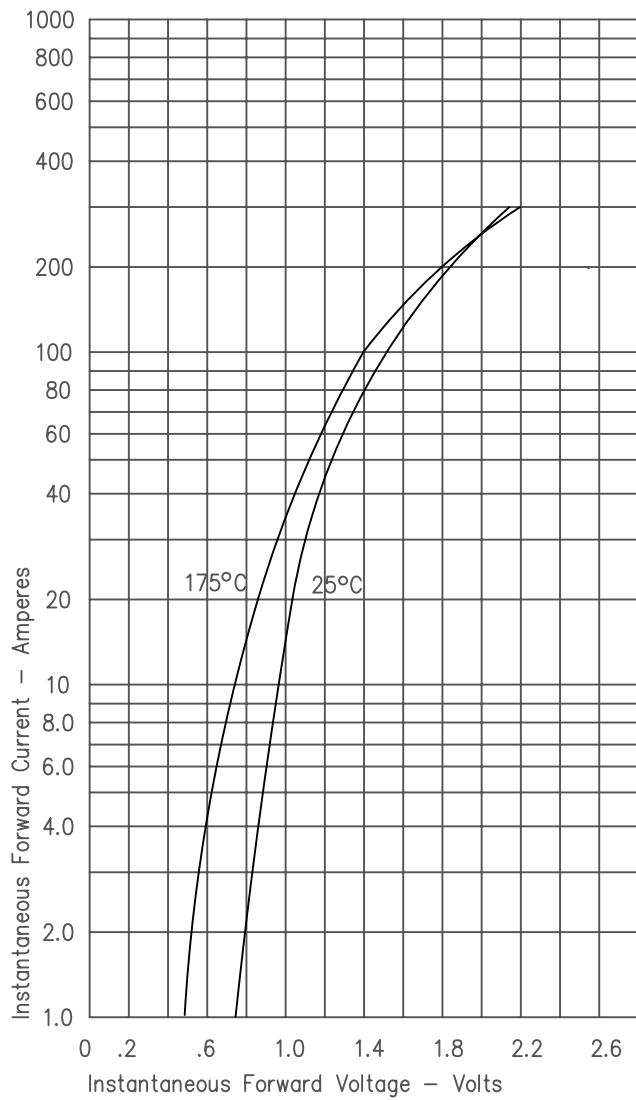


Figure 2  
Typical Reverse Characteristics

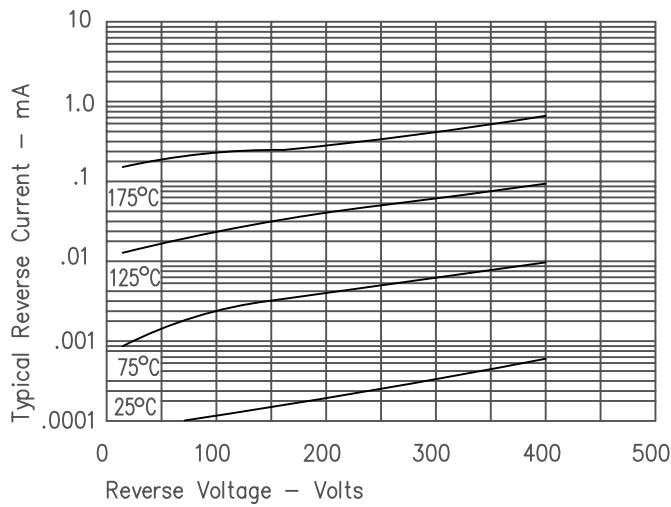


Figure 3  
Typical Junction Capacitance

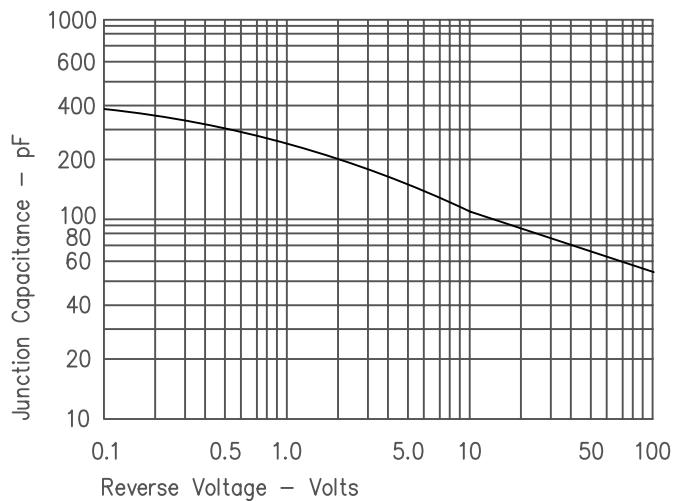


Figure 4  
Forward Current Derating

