

RoHs Compliant



CSM2-17

Low Cost High IP3 Mixer for PCS/WLL Applications

Features

- LO & RF 10 TO 2800 MHz
- IF 10 TO 2000 MHz
- LO DRIVE +17 dBm (NOMINAL)
- SURFACE MOUNT
- HIGH INTERCEPT +27 dBm (TYP.)
- +260°C REFLOW COMPATIBLE


Description

The CSM2-17 is a double balanced mixer, designed for use in the high volume wireless applications. The design utilizes Schottky ring quad diodes and broadband baluns to attain excellent performance.

Ordering Information

Part Number	Package
CSM2-17	Surface Mount

Product Image

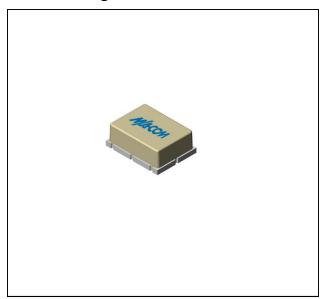

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +17 dBm (Downconverter application only)

Parameter Test Conditions		Units	Typical	Guaranteed	
raiailletei	rest conditions	Units		+25°C	-40° to +85°C
SSB Conversion Loss(max)	fR = 10 to 1200 MHz, fL = 10 to 1200 MHz, fI = 10 to 1000 MHz fR = 1200 to 2800 MHz, fL = 1200 to 2800 MHz, fi = 10 to 1500 MHz	dB dB	7.5 8.5	8.5 9.5	9.0 10.0
SSB Noise Figure			Within 1 dB of conversion loss		
L - R Isolation (min)	fL = 10 to 1200 MHz fL = 1200 to 2800 MHz	dB dB	35 30	32 28	30 26
L - I Isolation (min)	fL = 10 to 2800 MHz	dB	27	23	21
R - I Isolation (min)	fR = 10 to 2800 MHz	dB	27		
1 dB Conversion Comp.	fL = +17 dBm	dBm	+14		
Input IP3	fL = 10 to 2000 MHz, fl = 10 to 1000 MHz, fR = 10 to 2000 MHz fL = 2000 to 2800 MHz, fl = 10 to 2000 MHz, fR = 2000 to 2800 MHz	dBm dBm	+27 +23		
R-Port VSWR	fR = 10 to 2800 MHz		1.9:1		
L-Port VSWR	fL =10 to 1500 MHz fL = 1500 to 2000 MHz		2.0:1 2.75:1		
I-Port VSWR	fI = 10 to 1500 MHz		1.5:1		

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

North America Tel: 800.366.2266 / Fax: 978.366.2266

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298




RoHs Compliant




Low Cost High IP3 Mixer for **PCS/WLL Applications**


Typical Performance Curves


Conversion Loss vs. RF-Frequency -IF = 140MHz - IF=240MHz

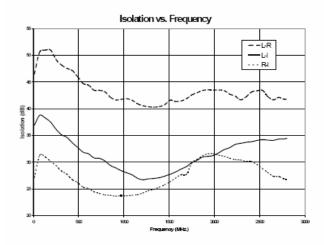


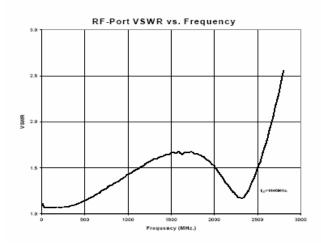

Third Order Input Intercept Point vs. RF-Frequency

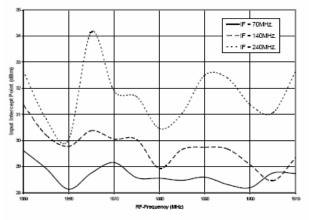

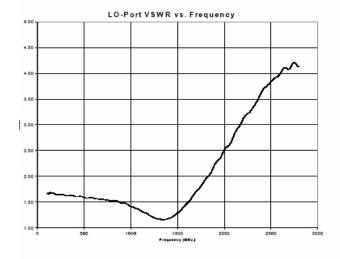

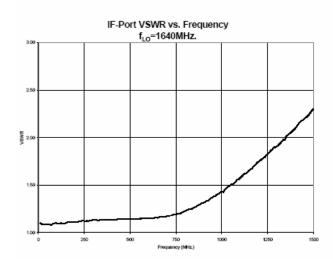

product(s) or information contained herein without notice. M/A-COM makes

M/A-COM Inc. and its affiliates reserve the right to make changes to the no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298




RoHs Compliant



Low Cost High IP3 Mixer for PCS/WLL Applications

CSM2-17

Outline Drawing: Surface Mount *

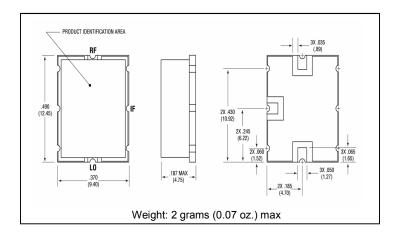

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

Absolute Maximum Ratings

Parameter	Absolute Maximum		
Operating Temperature	-40°C to +85°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+20 dBm max @ +25°C +17 dBm max @ +85°C		
Peak Input Current	50 mA DC		

- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298