

**DUAL 4-LINE TO 1-LINE DATA SELECTOR/MULTIPLEXER
WITH 3-STATE OUTPUT**
DESCRIPTION

The M74LS253P is a semiconductor integrated circuit containing two 4-line to 1-line data selector/multiplexer circuits and 3-state outputs.

FEATURES

- Selection inputs common to both circuits
- Output control inputs separate for each circuit
- 3-state outputs
- Wide operating temperature range ($T_a = -20 \sim +75^\circ C$)

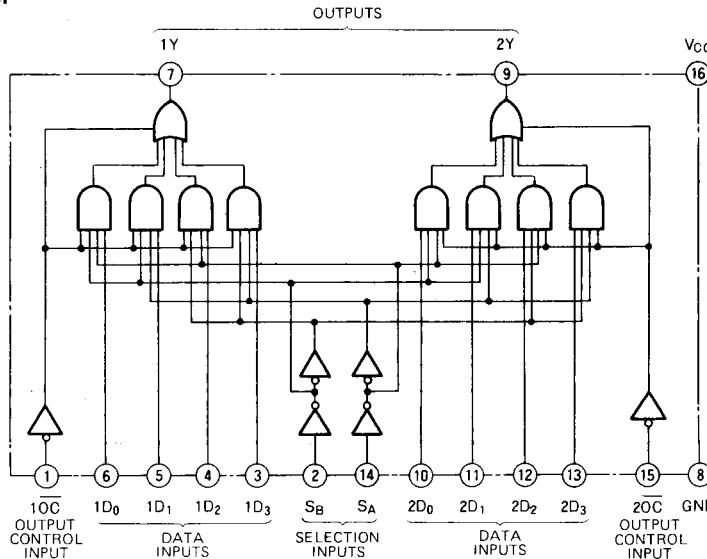
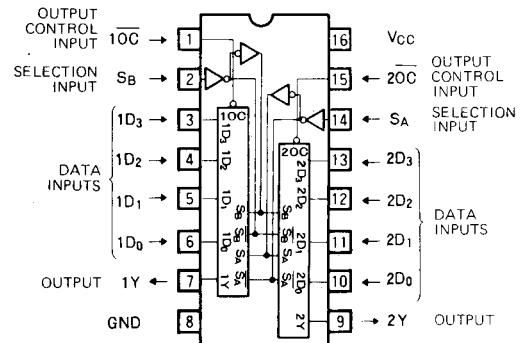
APPLICATION

General purpose, for use in industrial and consumer equipment.

FUNCTIONAL DESCRIPTION

This IC has two data selector circuits which provide 1-line selection of 4 input signal using two multiplexer circuits which convert the 4-bit parallel data into serial data by time-sharing. When 4-line signals are applied to the data inputs D_0 , D_1 , D_2 and D_3 , and 1 data is specified from among the data input by selection inputs S_A and S_B , the input signal is output at Y . By applying 4-bit parallel data to data inputs D_0 , D_1 , D_2 and D_3 and by connecting the output of a synchronous divide-by-four counter to S_A and S_B , data D_0 , D_1 , D_2 and D_3 appear in the order of D_0 , D_1 , D_2 and D_3 , synchronized with the clock pulse. S_A and S_B are common to both circuits while output control inputs \bar{OC} and \bar{OC} are separate. When \bar{OC} and \bar{OC} are set high, $1Y$ and $2Y$ are put in the high-impedance state ("Z") irrespective of the status of the inputs.

M74LS253P has the same functions and pin connections as M74LS153P but the latter is provided with active pull-up resistor outputs.

BLOCK DIAGRAM

PIN CONFIGURATION (TOP VIEW)

Outline 16P4
FUNCTION TABLE (Note 1)

| S_B | S_A | D_0 | D_1 | D_2 | D_3 | \bar{OC} | Y |
|-------|-------|-------|-------|-------|-------|------------|-----|
| X | X | X | X | X | X | H | Z |
| L | L | L | X | X | X | L | L |
| L | L | H | X | X | X | L | H |
| L | H | X | L | X | X | L | L |
| L | H | X | H | X | X | L | H |
| H | L | X | X | L | X | L | L |
| H | L | X | X | H | X | L | H |
| H | H | X | X | X | L | L | L |
| H | H | X | X | X | H | L | H |

Note 1 X : Irrelevant

Z : High-impedance state

DUAL 4-LINE TO 1-LINE DATA SELECTOR/MUX WITH 3-STATE OUTPUT**ABSOLUTE MAXIMUM RATINGS** ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

| Symbol | Parameter | Conditions | Limits | Unit |
|------------------|--|------------|-------------|------|
| V _{CC} | Supply voltage | | -0.5 ~ +7 | V |
| V _I | Input voltage | | -0.5 ~ +15 | V |
| V _O | Output voltage | Off-state | -0.5 ~ +5.5 | V |
| T _{opr} | Operating free-air ambient temperature range | | -20 ~ +75 | °C |
| T _{stg} | Storage temperature range | | -65 ~ +150 | °C |

RECOMMENDED OPERATING CONDITIONS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

| Symbol | Parameter | Limits | | | Unit |
|-----------------|---------------------------|------------------------|-----|------|------|
| | | Min | Typ | Max | |
| V _{CC} | Supply voltage | 4.75 | 5 | 5.25 | V |
| I _{OH} | High-level output current | V _{OH} ≥ 2.4V | 0 | -2.6 | mA |
| I _{OL} | Low-level output current | V _{OL} ≤ 0.4V | 0 | 4 | mA |
| | | V _{OL} ≤ 0.5V | 0 | 8 | mA |

ELECTRICAL CHARACTERISTICS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------|---------------------------------------|---|--|-------|------|------|
| | | | Min | Typ * | Max | |
| V _{IH} | High-level input voltage | | 2 | | | V |
| V _{IL} | Low-level input voltage | | | | 0.8 | V |
| V _{IC} | Input clamp voltage | V _{CC} =4.75V, I _{IC} =-18mA | | | -1.5 | V |
| V _{OH} | High-level output voltage | V _{CC} =4.75V, V _I =0.6V V _I =2V, I _{OH} =-2.6mA | 2.4 | 3.1 | | V |
| V _{OL} | Low-level output voltage | V _{CC} =4.75V V _I =0.8V, V _I =2V | I _{OL} =4mA I _{OL} =8mA | 0.25 | 0.4 | V |
| I _{OZH} | Off-state high-level output current | V _{CC} =5.25V, V _I =2V, V _O =2.7V | | | 20 | μA |
| I _{OZL} | Off-state low-level output current | V _{CC} =5.25V, V _I =2V, V _O =0.4V | | | -20 | μA |
| I _{IH} | High-level input current | V _{CC} =5.25V, V _I =2.7V | | | 20 | μA |
| I _{IL} | Low-level input current | V _{CC} =5.25V, V _I =10V | | | 0.1 | mA |
| I _{OS} | Short-circuit output current (Note 2) | V _{CC} =5.25V, V _O =0V | -30 | | -130 | mA |
| I _{CCL} | Supply current, all outputs low | V _{CC} =5.25V (Note 3) | | | 7 | mA |
| I _{CCZ} | Supply current, all outputs off | V _{CC} =5.25V (Note 4) | | | 8.5 | mA |

* : All typical values are at $V_{CC}=5V$, $T_a=25^\circ\text{C}$.

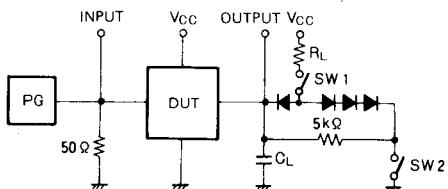
Note 2: All measurements should be done quickly and not more than one output should be shorted at a time.

Note 3: I_{CCL} is measured with all inputs at 0V.Note 4: I_{CCZ} is measured with 1OC and 2OC at 4.5V and all other inputs at 0V.**SWITCHING CHARACTERISTICS** ($V_{CC}=5V$, $T_a=25^\circ\text{C}$, unless otherwise noted)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------|---|--|--------|-----|-----|------|
| | | | Min | Typ | Max | |
| t _{PLH} | Low-to-high-level, high-to-low-level output propagation time, from inputs D ₀ ~D ₃ to output Y | | | 8 | 25 | ns |
| t _{PHL} | | | | 12 | 20 | ns |
| t _{PLH} | Low-to-high-level, high-to-low-level output propagation time, from inputs S _A , S _B to output Y | C _L =15pF (Note 5) | | 12 | 45 | ns |
| t _{PHL} | | | | 12 | 32 | ns |
| t _{PZH} | Output enable time to high-level | R _L =2kΩ, C _L =15pF (Note 5) | | 11 | 28 | ns |
| t _{PZL} | Output enable time to low-level | R _L =2kΩ, C _L =15pF (Note 5) | | 12 | 23 | ns |
| t _{PHZ} | Output disable time from high-level | R _L =2kΩ, C _L =5pF (Note 5) | | 15 | 41 | ns |
| t _{PLZ} | Output disable time from low-level | R _L =2kΩ, C _L =5pF (Note 5) | | 9 | 27 | ns |

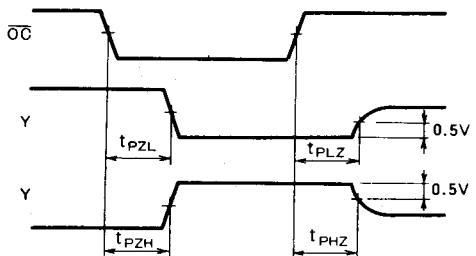
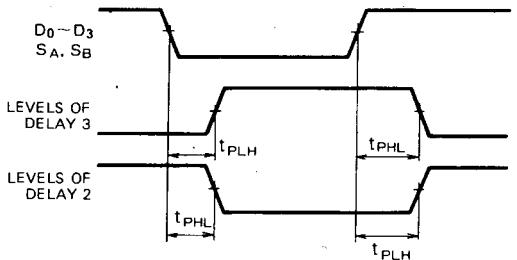
DUAL 4-LINE TO 1-LINE DATA SELECTOR/MUX WITH 3-STATE OUTPUT

Note 5: Measurement circuit



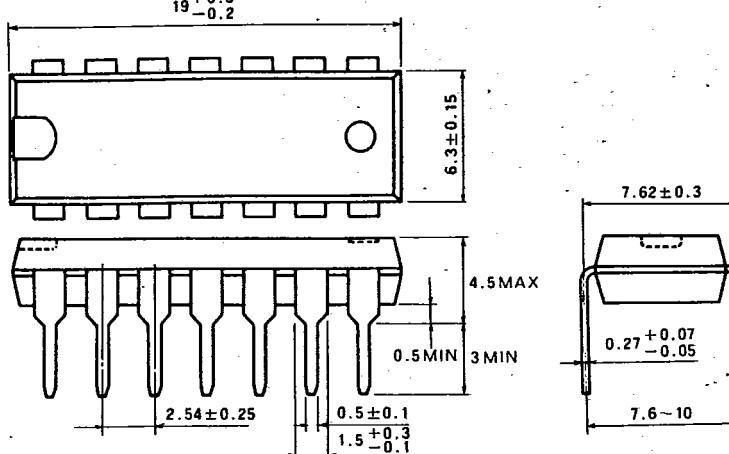
| Symbol | SW1 | SW2 |
|------------------|--------|--------|
| t _{PZH} | Open | Closed |
| t _{PZL} | Closed | Open |
| t _{PLZ} | Closed | Closed |
| t _{PHZ} | Closed | Closed |

- (1) The pulse generator (PG) has the following characteristics:
 PRR=1MHz, t_r=6ns, t_f=6ns, t_w=500ns, V_P = 3V_{p.p.}, Z_o = 50Ω.
 (2) All diodes are switching diodes. (t_{rr} ≤ 4ns)
 (3) C_L includes probe and jig capacitance.

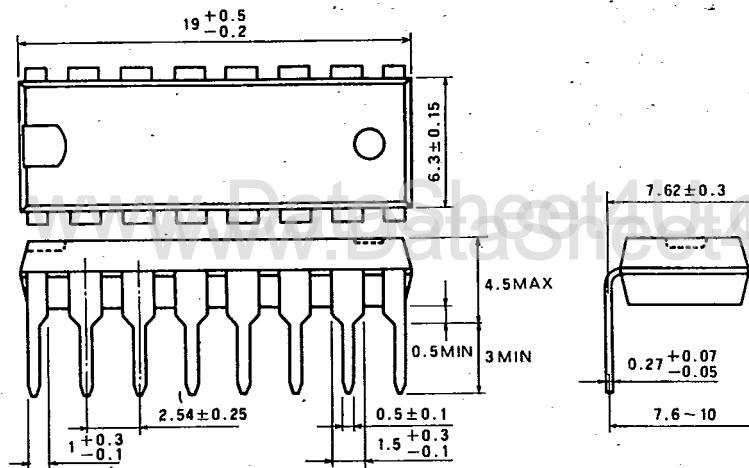
TIMING DIAGRAM (Reference level = 1.3V)

www.DataSheet4U.com

TYPE 14P4 14-PIN MOLDED PLASTIC DIL

Dimension in mm

**TYPE 16P4 16-PIN MOLDED PLASTIC DIL**

Dimension in mm

**TYPE 20P4 20-PIN MOLDED PLASTIC DIL**

Dimension in mm

