




Features:

- · 3 stage charging
- AC 115/230VAC selected by switch
- Built-in passive PFC function compliance to EN61000-3-2 Class A (option)
- Protection: Short circuit / Reverse polarity / Over voltage / Over temperature
- · Cooling by free air convection
- · Charger for lead-acid batteries
- · 2 color LED loading indicator
- · Low cost, High reliability
- · 3 years warranty






SPECIFICATION

MODEL		PB-30012	PB-300□-24	PB-300□-48			
ОИТРИТ	BOOST CHARGE VOLTAGE	14.4V	28.8V	57.6V			
	FLOAT CHARGE VOLTAGE	13.6V	27.2V	54.4V			
	VOLTAGE ADJUSTABLE RANGE	13 ~ 14.7V	26 ~ 28.8V	52 ~ 58.6V			
	RECOMMENDED BATTERY CAPACITY(AMP HOURS) Note 5	60 ~ 200Ah	30 ~ 100Ah	15 ~ 50Ah			
	BATTERY TYPE	Open & Sealed Lead Acid					
	MAX. OUTPUT CURRENT(Typ.) Note 7	20.85A	10.5A	5.3A			
	CONTINUOUS OUTPUT CURRENT (Typ.) Note 6	12.5A	6.25A	3.2A			
INPUT	VOLTAGE RANGE	90 ~ 132VAC / 180 ~ 264VAC selected by switch					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	85%	86%	88%			
	POWER FACTOR (Typ.)	>0.65 (with P type) at 230VAC					
	AC CURRENT (Typ.)	6A/115VAC 3A/230VAC					
	INRUSH CURRENT (Typ.)	COLD START 60A					
	LEAKAGE CURRENT	<3.5mA/240VAC					
PROTECTION	SHORT CIRCUIT	O/P Built in fuse (FS100) to protect short circuit condition, shut down o/p voltage and can not re-power on					
	REVERSE POLARITY	By internal fuse					
	OVER VOLTAGE	16 ~ 18V 31 ~ 35V 59 ~ 64V Protection type: Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	Protection type : Automatically derate charge current until zero					
FUNCTION	REMOTE CONTROL (CN5)	Open: Normal work Short: Stop Charging					
	WORKING TEMP.	-10 ~ +50°C (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.05%/°C (0~45°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY &	SAFETY STANDARDS	IEC60335-2-29 CB approved by TUV(except for 48V), UL60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH					
EMC (Note 4)	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Clas	Compliance to EN55022 (CISPR22) Class B				
1010 4)	HARMONIC CURRENT	Compliance to EN61000-3-2,-3 (only P type)					
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A					
	MTBF	115.8Khrs min. MIL-HDBK-217F (25°C)					
OTHERS	DIMENSION	253*135*48.5mm(L*W*H)					
-	PACKING	1.45Kg; 6pcs/9.7Kg/0.95CUFT					
NOTE	Ripple & noise are measure Tolerance : includes set up	ally mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. red at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. dered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets					

- 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.
- 5. This is Mean Well's suggested range. Please consult your battery manufacturer for their suggestions about maximum charging current limitation.
- 6. Test condition is at 25°C, charging current will change under different temperature.
- 7. Maximum charging current will be in the range of 90~110% rated output current.




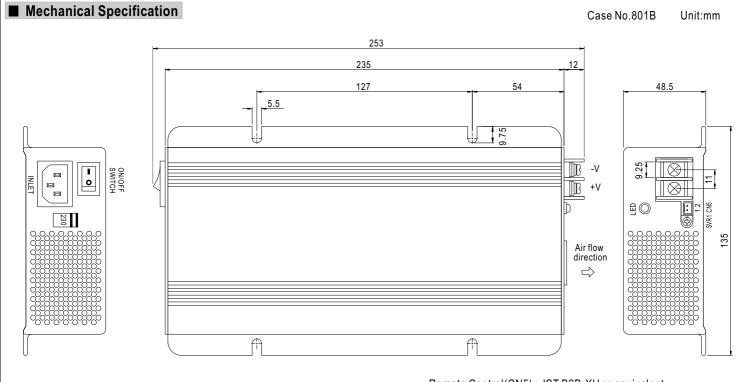

Remote Control(CN5): JST B2B-XH or equivalent


Assignment	Mating Housing	Terminal
PIN1,2 Open: Normal work	JST XHP	JST SXH-001T-P0.6
PIN1,2 Short: Stop Charging	or equivalent	or equivalent

■ Block Diagram

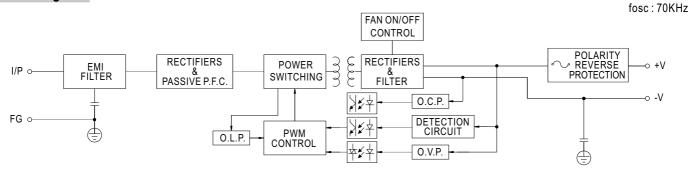


■ Charging Curve

■ Output Load VS Temperature

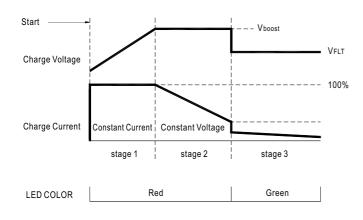

State	PB-300-12	PB-300-24	PB-300-48
Vboost	14.4V	28.8V	57.6V
VFLT	13.6V	27.2V	54.4V



EXTERNAL CASE TEMPERATURE (°C)