

# UNISONIC TECHNOLOGIES CO., LTD

# M4034

## LINEAR INTEGRATED CIRCUIT

# 3-INPUT VIDEO SWITCH


#### ■ DESCRIPTION

The UTC **M4034** is 3-input video switch selecting one of three input video or audio signals. Its operating supply voltage range is  $5 \sim 12V$  and bandwidth is 10MHz. Crosstalk is 70dB (at 4.43MHz).


#### ■ FEATURES

- \* Operating Voltage: +4.75V ~ +13V
- \* 3 Input-1 Output
- \* Muting Function available
- \* Wide Operating Supply voltage Range: 4.75V ~ 13V
- \* Cross-talk 70dB (at 4.43MHz)
- \* Muting Function available
- \* Bipolar Technology



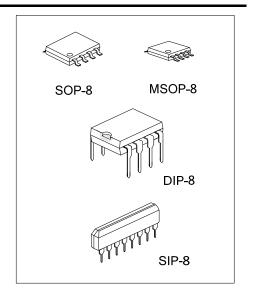


| Order        | Number       | Dookogo | Packing   |  |
|--------------|--------------|---------|-----------|--|
| Lead Free    | Halogen Free | Package |           |  |
| M4034L-D08-T | M4034G-D08-T | DIP-8   | Tube      |  |
| M4034L-G08-T | M4034G-G08-T | SIP-8   | Tube      |  |
| M4034L-S08-R | M4034G-S08-R | SOP-8   | Tape Reel |  |
| M4034L-S08-T | M4034G-S08-T | SOP-8   | Tube      |  |
| M4034L-SM1-R | M4034G-SM1-R | MSOP-8  | Tape Reel |  |

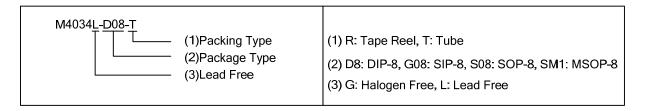


<u>www.unisonic.com.tw</u> 1 of 6

#### ■ PIN CONFIGURATION

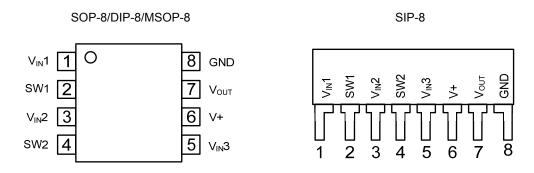

# ■ BLOCK DIAGRAM

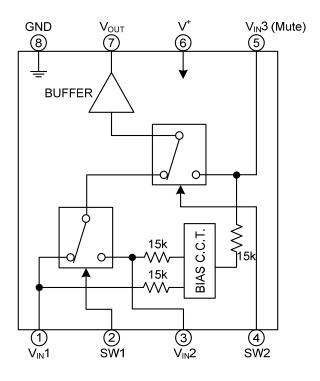

#### ■ ABSOLUTE MAXIMUM RATINGS

| PARAMETER             |        | SYMBOL           | RATINGS    | UNIT                 |
|-----------------------|--------|------------------|------------|----------------------|
| Supply Voltage        |        | V <sup>+</sup>   | 15         | V                    |
| Power Dissipation     | SOP-8  |                  | 300        | mW                   |
|                       | DIP-8  | P <sub>D</sub>   | 500        | mW                   |
|                       | MSOP-8 |                  | 250        | mW                   |
|                       | SIP-8  |                  | 800        | mW                   |
| Junction Temperature  |        | $T_J$            | +125       | $^{\circ}\mathbb{C}$ |
| Operating Temperature |        | $T_{OPR}$        | -20 ~ +75  | $^{\circ}\mathbb{C}$ |
| Storage Temperature   |        | T <sub>STG</sub> | -40 ~ +125 | $^{\circ}\mathbb{C}$ |

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ ELECTRICAL CHARACTERISTICS (V<sub>IN</sub>=5V, Ta=25°C)

| PARAMETER                    |      | SYMBOL          | TEST CONDITIONS  | MIN  | TYP  | MAX  | UNIT |
|------------------------------|------|-----------------|--|------|------|------|------|
| Recommended Supply Voltage   |      | V <sup>+</sup>  |  | 4.75 |      | 13.0 | V    |
| Output Offset Voltage        |      | $V_{O(OFF)}$    | (Note 2)   | -30  |      | +30  | mV   |
| Switch Change Voltage        | High | $V_{CH}$        | All inside SW : ON   | 2.4  |      |      | V    |
|                              | Low  | $V_{CL}$        | All inside SW : OFF  |      |      | 8.0  | V    |
| Operating Current            |      | Icc             | S1=S2=S3=S4=S5=1   |      | 10.6 | 14.5 | mA   |
| Voltage Gain                 |      | $G_V$           | V <sub>IN</sub> =2.5V, 100kHz, V <sub>OUT</sub> /V <sub>IN</sub>           | -0.5 |      | +0.5 | dB   |
| Total Harmonic Distortion    |      | THD             | V <sub>INI</sub> =2.5V, 1kHz   |      | 0.03 |      | %    |
| Differential Gain            |      | DG              | V <sub>IN</sub> =2V, Staircase signal                                      |      | 0    |      | %    |
| Differential Phase           |      | DP              | V <sub>IN</sub> =2V, Staircase signal                                      |      | 0    |      | deg  |
| Frequency Characteristic (1) |      | G <sub>f1</sub> | V <sub>IN</sub> =2.5V, V <sub>OUT</sub> (20Hz)/V <sub>OUT</sub> (100kHz)   | -1.0 |      | +1.0 | dB   |
| Frequency Characteristic (2) |      | G <sub>f2</sub> | $V_{IN}$ =2.0V, $V_{OUT}$ (10MHz)/ $V_{OUT}$ (100kHz)                      | -1.0 |      | +1.0 | dB   |
| Crosstalk (1)                |      | CT1             | V <sub>IN</sub> =2.0V, 4.43MHz, V <sub>OUT</sub> /V <sub>IN</sub> (Note 3) |      | -70  |      | dB   |
| Crosstalk (2)                |      | CT2             | V <sub>IN</sub> =2.0V, 4.43MHz, V <sub>OUT</sub> /V <sub>IN</sub> (Note 4) |      | -70  |      | dB   |
| Input Impedance              |      | R <sub>1</sub>  |  |      | 15   |      | kΩ   |
| Output Impedance             |      | Rout            |  |      | 10   |      | Ω    |

Note 1: If it is not shown about switch condition, it is tested on three conditions below.

(a) S1=2, S2=S3=S4=S5=1, (b) S2=S4=2, S1=S3=S5=1, (c) S3=S5=2, S1=S2=1, S4=1, or 2.

Note 2: S1=S2=S3=1, Output DC Voltage difference of three mode below.

(a) S4=S5=1, (b) S4=2, S5=1 (c) S4=1 or 2, S5=2

Note 3: S5=1, Tested on all combination of S1 to S4 excepted two below.

(a) S1=S2, S4=1 (b) S2=S4=2


Note 4: Tested on all combination of S1 to S4 excepted one.

(a) S5=2, S3=2

# ■ EQUIVALENT CIRCUIT

| PIN NO. | PIN FUNCTION                | INSIDE EQUIVALENT CIRCUIT  |
|---------|-----------------------------|--|
| 1       | V <sub>IN</sub> 1           | V <sub>IN</sub> 1 ≥ 200Ω<br>200Ω 15kΩ  |
| 2       | SW1                         | $\begin{array}{c} \text{SW1} \\ \text{2} \text{k} \Omega \\ \text{200} \Omega \\ \end{array}$      |
| 3       | V <sub>IN</sub> 2           | V <sub>IN</sub> 2 ≥ 200Ω<br>200Ω 15kΩ  |
| 4       | SW2                         | $\begin{array}{c c} \text{SW2} \\ \hline \\ 2k\Omega \\ \hline \\ 200\Omega \\ \hline \end{array}$ |
| 5       | V <sub>IN</sub> 3<br>(Mute) | V <sub>IN</sub> 3 ≥ 200Ω<br>200Ω 15kΩ  |
| 6       | V <sup>+</sup>              |  |
| 7       | V <sub>оит</sub>            | 200 Ω V <sub>OUT</sub> 5mA   |
| 8       | GND                         |  |

# ■ TEST CIRCUIT

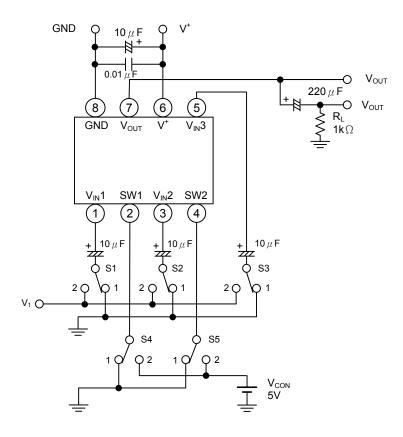


# ■ CONNECTION DIAGRAM


| <b>Terminal Name</b> | V <sub>IN</sub> 1  | SW1 | V <sub>IN</sub> 2  | SW2 | V <sub>IN</sub> 3            | V <sup>+</sup> | V <sub>OUT</sub>                  | GND |
|----------------------|--------------------|-----|--------------------|-----|------------------------------|----------------|-----------------------------------|-----|
| DC Voltage           | $\frac{3}{5}V^{+}$ |     | $\frac{3}{5}V^{+}$ |     | $\frac{3}{5}$ V <sup>+</sup> |                | $\frac{3}{5}$ V <sup>+</sup> -0.7 |     |

#### TYPICAL APPLICATION CIRCUIT

Oscillation Prevention on light loading conditions Recommended under circuit

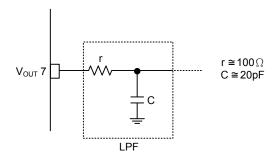

Note: 0.1uF capacitor is required between INPUT and GND for bias type input at mute mode.



UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.