1. Scope of Application


This data sheet is applied to the chip type LED lamp , model CL-L234A-MC18W1-C

2. Part code

C L - <u>L 2 3 4 A - M C 1 8 W 1</u> - C
Series
Special specifications M : General Color Rendering Index Typ. 85 Type.
Watt class C18 : 18 watt package.
Lighting color W1 : Compliance with ANSI C78.377-2008, 3-step MacAdam ellipse Correlated Color Temperature 4000K.

Symbol	CITILED
Name	CL-L234A-MC18W1-C
CITIZEN	ELECTRONICS CO., LTD. JAPAN

3. Outline drawing

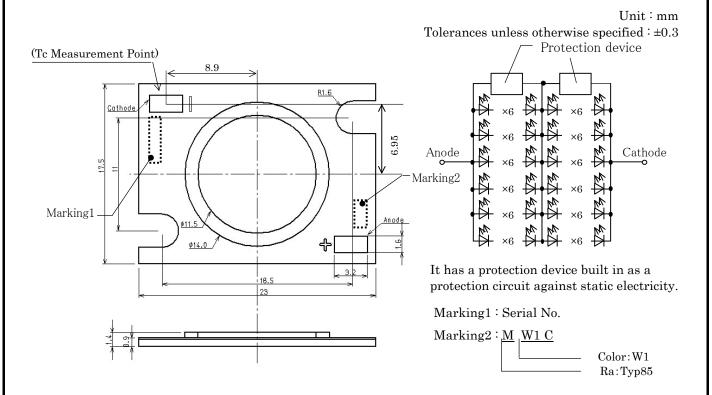

4. Performance

(1) Absolute Maximum Ratin	(1		1)	١.	Abso	lute	Ma	iximu	um	Rat	in
----------------------------	----	--	---	---	----	------	------	----	-------	----	-----	----

	,			-
Parameter	Symbol	Rating Value	Unit	I
Power Dissipation	P _D	29.4	W	
Forward Current	$I_{\rm F}$	720	mA	
Forward Pulse Current	$I_{\rm FP}$	750	mA	*1
Reverse Current	I_R	1	mA	
Operating Temperature	T _{OP}	-30 ~ +85	С	
Storage Temperature	T_{ST}	-40 ~ +100	С	
Junction Temperature	Tj _{Max}	150	С	*2

*1 Forward Current : Duty<=1/10 , Pulse Width<=10msec

*2 D.C. Current : Tj = Tc + Rj-c × P_D

 $Pulse \ Current: Tj = Tc + Rj - c \times Pw(Power \ Dissipation \ / \ One - Pulse) \times Duty$

Symbol	CITILED
Name	CL-L234A-MC18W1-C
CITIZEN	ELECTRONICS CO.,LTD. JAPAN

(2) Electro-optical Characteristics (Tc=25 C)								
Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit		
Forward Voltage	$V_{\rm F}$	I_F =480mA	35.8	38.2	43.2	V		
Luminous Flux	$\Phi_{\rm V}$	I _F =480mA	1131	1337	-	lm		
General Color Rendering Index	Ra	I _F =480mA	80	85	-	-		
Thermal Resistance	Rj-c	Junction-case	-	2.4	-	C/W		

Chromaticity coordinates (Condition : I_F =480mA , Tc=25 C)

Color rank	Center		
	х	У	
	0.3818	0.3797	
W1	Oval pa	rameter	
VV 1	а	0.00939	
	b	0.00402	
	θ°	54.00	

Reference (ANSI C78.377)								
		Color	rank	х	У			
			Center	0.3818	0.3797	(3985K)		
			а	0.4006	0.4044			
		W1	b	0.3736	0.3874			
			с	0.3670	0.3578			
			d	0.3898	0.3716			


*Color region stay within MacAdam "3-step" ellipse from the chromaticity center.

*The chromaticity center refers to ANSI C78.377:2008.

Please refer to ANSI C78.377 for the chromaticity center.

 $^{\ast}\theta$ is the angle between the major axis of the ellipse and the x-axis,


and a and b are the major and minor semi-axes of an ellipse. (Ref. IEC 60081:1997 AnnexD)

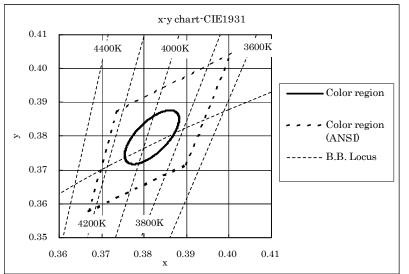


Note: The tolerance of measurement at our tester is $V_F\pm 3\%$, $\Phi v\pm 10\%$, $Chromaticity(x,y)\pm 0.005.$

Symbol	CITILED
Name	CL-L234A-MC18W1-C
CITIZEN	ELECTRONICS CO., LTD. JAPAN


5. Characteristics




•Forward Current vs. Forward Voltage




• Forward Current vs. Chromaticity Coordinate



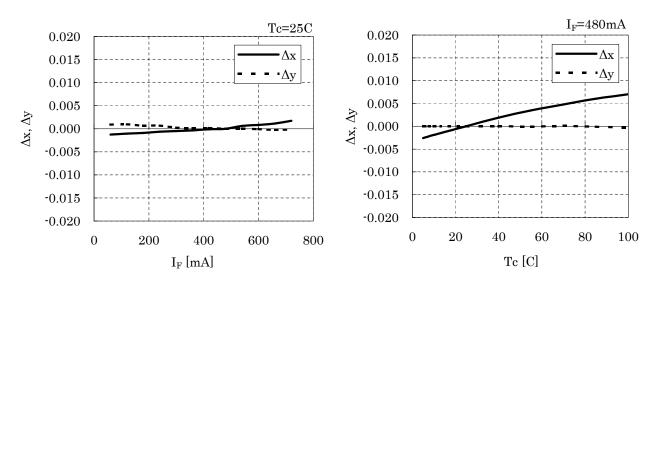

Symbo	1 CITILED
Name	CL-L234A-MC18W1-C
CITIZE	N ELECTRONICS CO.,LTD. JAPAN

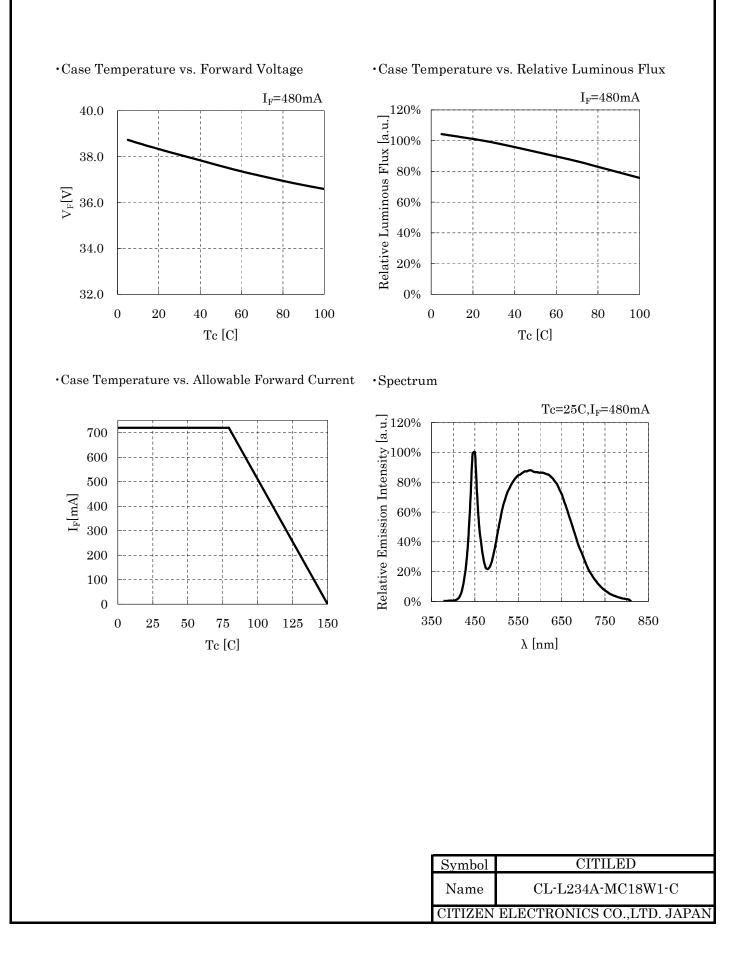

6. Reliability

(1) Details of the tests

Test Item	Test Condition		
Continuous Operation Test	Ta=25 C, I_F =480 mA× 1000 hours(with Al-fin)		
Continuous Operation Test	Ta=80 C, Tj=120 C, I _F =480 mA× 1000 hours (with Al-fin)		
Low Temperature Storage Test	-40 C × 1000 hours		
High Temperature Storage Test	$100 \text{ C} \times 1000 \text{ hours}$		
Moisture-proof Test	60 C, 90 %RH for 1000 hours		
Thermal Shock Test	-40 C \times 30 minutes – 100 C \times 30 minutes, 100 cycle		

(2) Judgment Criteria of Failure for Reliability Test

Measuring Item	Symbol	Measuring Condition	Judgment Criteria for Failure				
Forward Voltage	$V_{\rm F}$	I _F =480mA	> U × 1.1				
Total Luminous Flux	Φv	I _F =480mA	$< S \times 0.85$				

U defines the upper limit of the specified characteristics. S defines the initial value.

Note: Measurement shall be taken between 2 hours and 24 hours, and the test pieces should be returned to the normal ambient conditions after the completion of each test.

CL-L221-C14L1 reliability test results will be used for CL-L234A-MC18W1-C.

Symbol	CITILED
Name	CL-L234A-MC18W1-C
CITIZEN	ELECTRONICS CO., LTD. JAPAN

(Ta=25 C)


7. Packing Specifications

(1) Packing

An empty tray is placed on top of a five-tier tray which contain 40 pieces each. The set of six trays is banded together with two rubber bands. (Smallest packing unit: 200 pieces) A label with product name, quantity, lot number is placed on the upper empty tray.


Tray (Dimensions: 310 × 210 × 14.6mm / Materials: Electrically conductive PS)

< Packing figure >

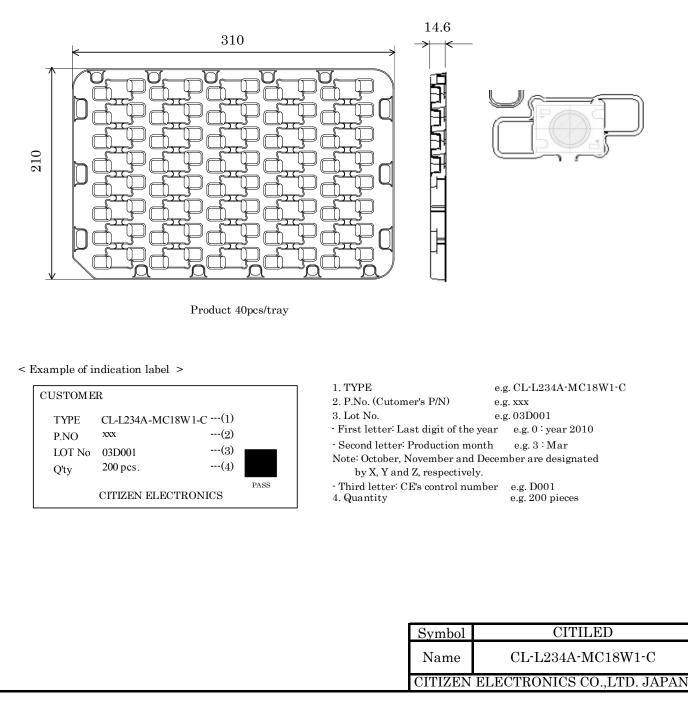


8. Precautions


- 1. Avoid the application of any stress to the resin portion.
- 2. Avoid any contact by a sharp metal nail or other materials with the resin portion.



Resin portion (Shaded area)

3. This product should be secured firmly by fastening an M3 screw on both sides of the product. Please be careful not to apply any stress to the product during the clamping operation. As the connection status could vary depending on materials of outer heat sink, please check thoroughly.

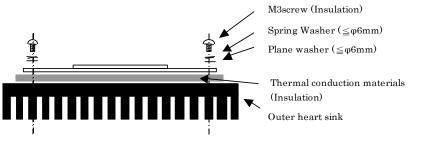




Recommended installation screw pitch

- 4. Insulation between the terminal section and the heat sink section of the LED is not covered by warranty. With regard to insulation after this product has been assembled in an apparatus, preventive action should be carried out by the customer.
- 5. For fixing this product to the outer heat sink, heat grease should be applied to the whole rear surface so that the product can dissipate heat as a whole. Please pay attention to avoid product deformation when conducting the clamping operation with heat grease in sheet form.
- 6. Handling of static electricity
 - These products are sensitive to static electricity charge.

Please take measures to prevent any static electricity being produced such as the wearing of a wristband or anti-static gloves when handling this product.

- All devices, equipment and machinery must be properly grounded. It is recommended that precautions be taken against surge voltage to the equipment that mounts the LEDs.
- ESD sensitivity of this product is 1000V (HBM, based on JEITA ED-4701/304).
- When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not.
- It is easy to find static-damaged LEDs by a light-on test.

<pre><light-on criter<="" pre="" test=""></light-on></pre>	rion>
Condition	Judgmental criterion
I _F =6mA/PKG	No-lighting in entire block making up parallel circuit is unacceptable



L234 consists of twelve blocks.

Symbol	CITILED
Name	CL-L234A-MC18W1-C
CITIZEN	ELECTRONICS CO., LTD. JAPAN

8. Precautions (continued)

7. Lighting at a low current

A minimum current value of lighting of all dice is 30mA.

When a minimal current is applied, LED dice may look different in their brightness due to the individual difference of the LED element, and it is not a failed product.

- 8. Please be aware that this product should not come into contact with any other parts in assembled status.
- 9. Drive circuit

- A constant current circuit is recommended as a drive circuit. And when two or more LED packages are connected, the series connection between each package is recommended.

- Please design a circuit that prevents any reverse voltage (excess current) from being applied to this product instantaneously when the circuit is ON or OFF.
- 10. Heat generation
- As this product is designed with consideration of the heat release property of module, a heat release design is required to use this product efficiently. Please ensure that heat generation is not in excess of the absolute maximum rating.
 - (Refer to 4-1 Performance)
- Factors responsible for an increase in temperature include heat generation attributed to ambient temperature conditions or power dissipation. Thus, drive conditions should be taken into consideration, depending on ambient temperature (Ta).
- 11. Recommended soldering condition (This product is not adaptable to reflow process)
- Manual soldering
- Soldering shall be implemented using a soldering bit of 40W or less with a temperature 350°C or less within 3.5 seconds for one land.
- (Recommended condition in a case of lead-free solder condition)
- No external force shall be applied to resin part during soldering.
- Next process of soldering should be carried out after the product has returned to ambient
- For soldering correction
- Regarding soldering correction, above conditions shall be used.
- Contacts number of soldering bit should be within twice for each terminal as a correction.
- * Citizen Electronics cannot guarantee if usage exceeds this recommended conditions. Please use it after sufficient verification is carried out on your own risk if necessary.

12. Other

- This product complies with RoHS directives.

Symbol	CITILED
Name	CL-L234A-MC18W1-C
CITIZEN	ELECTRONICS CO., LTD. JAPAN

- 9. Precautions with regard to product use
- 1. This document is provided for reference purposes only so that CITIZEN ELECTRONICS' products are used as intended. CITIZEN ELECTRONICS neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of CITIZEN ELECTRONICS or any third party with respect to the information in this document.
- 2. All information included in this document such as product data, diagrams, charts, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any CITIZEN ELECTRONICS' products listed in this document, please confirm the latest product information with a CITIZEN ELECTRONICS' sales office, and formal specifications must be exchanged and signed by both parties prior to mass production.
- 3. CITIZEN ELECTRONICS has used reasonable care in compiling the information included in this document, but CITIZEN ELECTRONICS assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
- 4. Absent a written signed agreement, except as provided in the relevant terms and conditions of sale for product, and to the maximum extent allowable by law, CITIZEN ELECTRONICS assumes no liability whatsoever, including without limitation, indirect, consequential, special, or incidental damages or loss, including without limitation, loss of profits, loss of opportunities, business interruption and loss of data, and disclaims any and all express or implied warranties and conditions related to sale, use of product, or information, including warranties or conditions of merchantability, fitness for a particular purpose, accuracy of information, or no infringement.
- 5. Though CITIZEN ELECTRONICS works continually to improve products' quality and reliability, products can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards to minimize risk and avoid situations in which a malfunction or failure of a product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. In addition, customers are also responsible for determining the appropriateness of use of any information contained in this document such as application cases not only with evaluating by their own but also by the entire system. CITIZEN ELECTRONICS assumes no liability for customers' product design or applications.
- 6. Please contact CITIZEN ELECTRONICS' sales office if you have any questions regarding the information contained in this document, or if you have any other inquiries.

Symbol CITILED	Symbol
Name CL-L234A-MC18W1-C	Name
CITIZEN ELECTRONICS CO.,LTD. JAPA	CITIZEN