

# SPECIFICATION FOR APPROVAL

- ( ) Preliminary Specification
- ( **♦** ) Final Specification


Title

# 8.9" WSVGA TFT LCD

Customer	ACER
MODEL	

SUPPLIER	LG Display Co., Ltd.		
*MODEL	LP089WS1		
Suffix	TLA1		

\*When you obtain standard approval, please use the above model name without suffix



APPROVED BY	SIGNATURE					
G. J. Kwon/ Manager						
REVIEWED BY						
C. J. Jun / Manager						
PREPARED BY						
P. A. Choi / Engineer						
Products Engineering Dept. LG Display Co., Ltd						



## <u>Contents</u>

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6
3-2	INTERFACE CONNECTION	7
3-3	LVDS SIGNAL TIMING SPECIFICATIONS	8
3-4	SIGNAL TIMING SPECIFICATIONS	10
3-5	SIGNAL TIMING WAVEFORMS	10
3-6	COLOR INPUT DATA REFERNECE	11
3-7	POWER SEQUENCE	12
4	OPTICAL SFECIFICATIONS	13
5	MECHANICAL CHARACTERISTICS	16
6	RELIABLITY	20
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	21
7-2	EMC	21
8	PACKING	
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
9	PRECAUTIONS	23
Α	APPENDIX. Enhanced Extended Display Identification Data	25



## **RECORD OF REVISIONS**

Revision No	Revision Date	Page	Description	EDID ver
0.0	May. 26. 2008	All	First Draft (Preliminary Specification)	-
0.1	July. 23. 2008	All	All page update	-
0.2	Aug. 15. 2008	26~28	EDID upate	-
			• • • • • • • • • • • • • • • • • • • •	••••••
				•••••
				••••••
				•••••




## 1. General Description

The LP089WS1 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 8.9 inches diagonally measured active display area with WSVGA resolution(1024 horizontal by 600 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP089WS1 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP089WS1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP089WS1 characteristics provide an excellent flat display for office automation products such as Notebook PC.

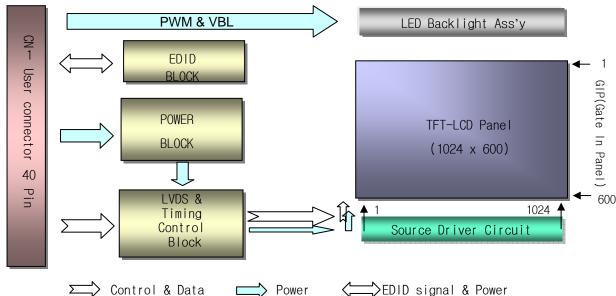

#### **General Features**

Active Screen Size	8.9 inches diagonal
Outline Dimension	213.4(H) × 129.55(V) × .5.45(D,Max.) [mm]
Pixel Pitch	0.1905mm × 0.189 mm
Pixel Format	1024 horiz. By 600 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	180 cd/m <sup>2</sup> (Typ.5 point)
Power Consumption	Total 2.3 Watt(Typ.) @ LCM circuit 0.76 Watt(Typ.), B/L input 1.54 Watt(Typ.)
Weight	200g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Glare treatment of the front polarizer
RoHS Comply	Yes

Ver. 1.0




## 2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Parameter	Symbol	Val	ues	Units	Notes	
Farameter	Symbol	Min	Max	UTIIIS		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 $\pm$ 5°C	
Operating Temperature	Тор	0	50	°C	1	
Storage Temperature	Нѕт	-20	60	°C	1	
Operating Ambient Humidity	Нор	10	90	%RH	1	
Storage Humidity	Нѕт	10	90	%RH	1	

#### Table 1. ABSOLUTE MAXIMUM RATINGS

Note : 1. Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be 39°C Max, and no condensation of water.

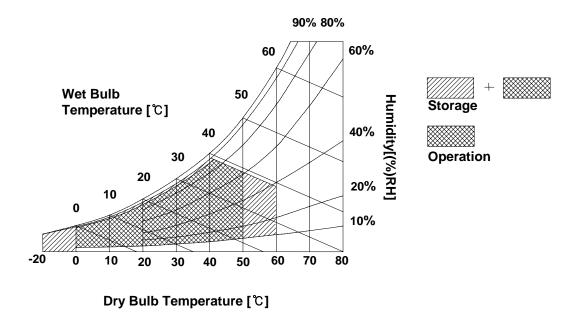



## 3. Electrical Specifications

#### **3-1. Electrical Characteristics**


The LP141WX5 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the LED BL.

Parameter	Symbol		Unit	Notes		
Palameter	Symbol	Min	Тур	Max	Unit	Notes
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V <sub>DC</sub>	[
Power Supply Input Current	I <sub>CC</sub>	-	230	265	mA	1
Power Consumption	Pc		0.76	0.87	Watt	1
Differential Impedance	Zm	90	100	110	Ohm	2
LED Backlight ( With LED Driver ) :						
LED Driver(@5V)	P <sub>DRIVER</sub>	-	5	-	Watt	
Operating Voltage	V <sub>LED</sub>	-	25.6	29	V	
Operating Current per string	I <sub>LED</sub>	-	17.2	18	mA	3
Power Consumption	P <sub>BL</sub>	-	1.32	1.54	Watt	4
Life Time		10000	-	-	Hrs	5

#### Table 2. ELECTRICAL CHARACTERISTICS

#### Note)

1. The specified current and power consumption are under the Vcc = 3.3V,  $25^{\circ}$ C, fv = 60Hz condition whereas Mosaic pattern is displayed and fv is the frame frequency.



- 2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
- 3. The typical operating current is for the typical surface luminance ( $L_{WH}$ ) in optical characteristics.
- ILED is the current of each LED's string, LED backlight has 6 strings on it.
- 4. The LED power consumption shown above does not include power of external LED driver circuit for typical current condition.
- 5. The life time is determined as the time at which brightness of LED is 50% compare to that of initial value at the typical LED current.

LP089WS1 Liquid Crystal Display



**Product Specification** 

#### **3-2. Interface Connection**

This LCD employs one interface connection, a 40 pin connector is used for the module electronics interface. The electronics interface connector is a model 20347-#40E-## manufactured by I-PEX.

Pin	Symbol	Table 3. MODULE CONNECTOR PIN CONF Description	Notes
	GND	Ground	110165
1	VDD	+3.3V Power Supply	
2			
3	VDD	+3.3V Power Supply	
4	V <sub>EDID</sub>	+3.3V EDID Power	1, Interface chips 1.1 LCD :SiW, 1port including
5	NC	No Connection	LVDS Receiver
6		EDID Clock Input	1.2 System :
7		EDID Data Input	* Pin to Pin compatible with LVDS
8	RxIN0-	LVDS differential data input	2. Connector
9	RxIN0+	LVDS differential data input	2.1 LCD :I-PEX 20347-340E-12
10	GND	Ground	(Locking type)
11	RxIN1-	LVDS differential data input	or equivalent
12	RxIN1+	LVDS differential data input	2.2 Mating : 20345-#40T-##
13	GND	Ground	2.3 Connector pin arrangement
14	RxIN2-	LVDS differential data input	
15	RxIN2+	LVDS differential data input	40 1 ПППП
16	GND	Ground	
17	RxCLKIN-	LVDS differential clock input	
18	RxCLKIN+	LVDS differential clock input	[LCD Module Rear View]
	GND	Ground	
20	NC	No Connection	
21	NC	No Connection	
	GND	Ground	
23	NC	No Connection	
	NC	No Connection	
25	GND	Ground	
26	NC	No Connection	
27	NC	No Connection	
28	GND	Ground	
29	VLED	+5V LED Power Supply	
30	VLED	+5V LED Power Supply	
30	VLED_GND	LED Ground	
31	VLED_GND	LED Glound	
32	VLED_GND	LED Glound	
	NC	No Connection	
	NC NC		
35		No Connection	
36	NC	No Connection	
37	NC	No Connection	
38	S_PWMIN	System PWM signal input	[Note 1]
	BL_ON or NC	LED Enable or No Connection[Note 1]	Let this pin NC if this pin is not used.
40	NC	No Connection	(On: 2.0V↑,Off:0~0.4V)


#### Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Ver. 1.0



## 3-3. LVDS Signal Timing Specifications


## 3-3-1. DC Specification

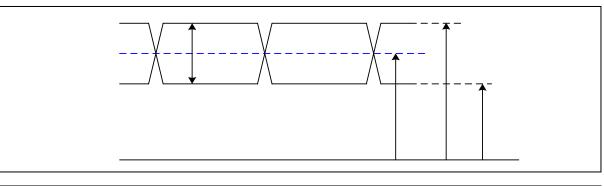

Description	Symb ol	Min	Max	Unit	Notes
LVDS Differential Voltage	V <sub>ID</sub>	100	600	mV	-
LVDS Common mode Voltage	V <sub>CM</sub>	0.6	1.8	V	-
LVDS Input Voltage Range		DS <sub>0.3</sub>	2.1	V	-

 $|V_{ID}|$ 


## 3-3-2. AC Specification




Description	Symbol	Min	Hax II		LVDS <sub>Notes</sub> (LVD
LVDS Clock to Data Skew Margin	t <sub>skew</sub> 0	V <sup>- 400</sup>	# V <sub>CI</sub> + 400	y = {( ps	LVDS+) + (LVD 85MHz > Fclk ≥ 65MHz
LVDS Clock to Data Skew Margin	t <sub>skew</sub>	- 600	+ 600	ps	65MHz > Fclk ≥ 25MHz
LVDS Clock to Clock Skew Margin (Even to Odd)	t <sub>SKEW_EO</sub>	- 1/7	+ 1/7	T <sub>clk</sub>	-
Maximum deviation of input clock frequency during SSC	F <sub>DEV</sub>	-	± 3	%	-
Maximum modulation frequency of input clock during SSC	F <sub>MOD</sub>	-	200	KHz	-



LP089WS1 Liquid Crystal Display

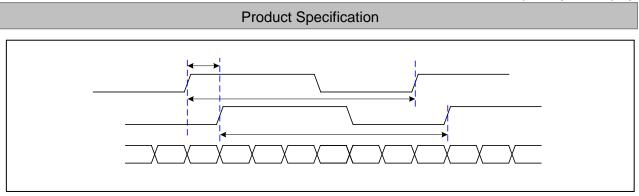


< Clock skew margin between channel >

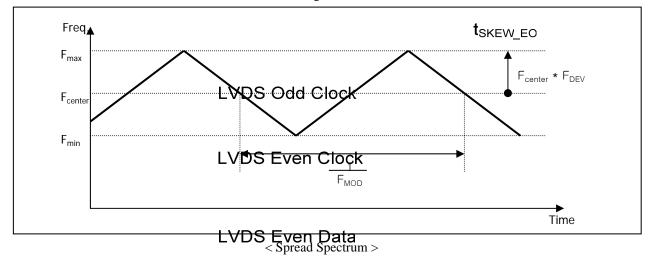

#### 3-3-3. Data Format

- LVDS 1 Port

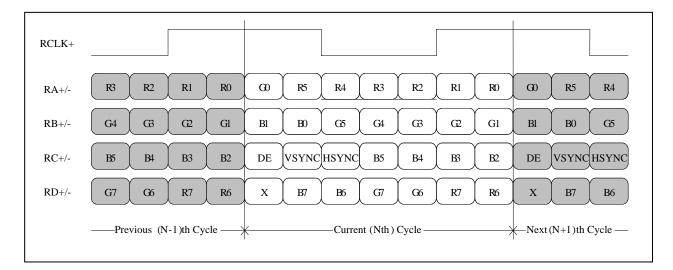

< LVDS Data Format >

T<sub>clk</sub>




## 3-4. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation. Table 5. TIMING TABLE

ITEM	Symbol		Min	Тур	Мах	Unit	Note
DCLK	Frequency	f <sub>CLK</sub>	-	50.4	-	MHz	
	Period	Thp	1024	1024	1024		
Hsync	Width	t <sub>wH</sub>	1320	1344	1362	tCLK	
	Width-Active	t <sub>WHA</sub>	132	136	150		
	Period	t <sub>vP</sub>	600	600	600		
Vsync	Width	t <sub>wv</sub>	621	625	632	tHP	
	Width-Active	t <sub>wva</sub>	1	3	5		
	Horizontal back porch	t <sub>HBP</sub>	144	160	160	+CL K	
Data	Horizontal front porch	t <sub>HFP</sub>	20	24	28	tCLK	
Enable	Vertical back porch	t <sub>vBP</sub>	20	22	24	tHP	
	Vertical front porch	t <sub>VFP</sub>	0	0	3	ιΠΡ	



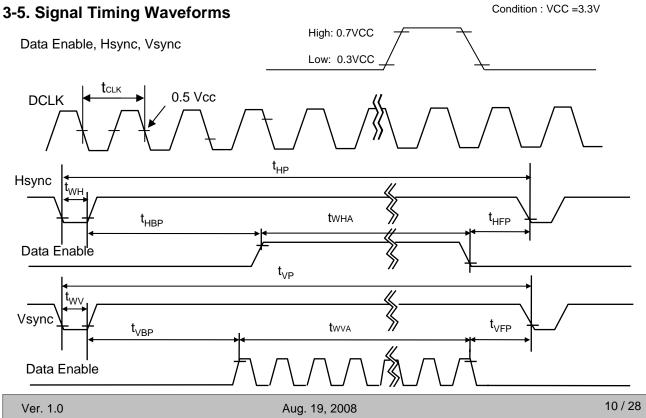



## **3-6. Color Input Data Reference**


The brightness of each primary color (red,green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

									Inp	out Co	olor D	ata							
			R	ED					GRE	EEN					BL	UE			
		MSE						MSE					LSB						LSB
	1	R 5	R 4	R 3	R 2	R 1		<u> </u>	G 4	G 3		G 1	G 0	B 5	B 4	B 3	B 2	B 1	В0
	Black	0	0	0 	0 	0	0	0 	0 	0	0	0	0	0 	0	0	0	0	0
	Red	1	1	1 	1	1 	1	0 	.0	0	0	0	0	0		0	0	0	0
	Green	0	0	. 0	. 0	0	0	1	1		1	1	1	0	0	0	0	0	0
Basic	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
RED										•••••	 	•••••			•••••		 		
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
GREEN					•••••					•••••	• • • • • 	•••••			•••••	· · · · · ·	••••• ••		
	GREEN (62)	0	0	0	0	0	0	 1	 1	 1	 1	 1	0	0	0	0		0	0
	GREEN (63)	0	0	0	0	0	0	 1	1	1		1	1	 0	0	0	0	0	0
	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
BLUE										•••••	• • • • • • 	•••••			•••••	· · · · · ·	 		
	BLUE (62)	0	0	0	0	0	0	 0	0	0	0	0	0	 1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Tabla 7	COLOR DATA REFERENCE
rable /.	COLUR DATA REFERENCE



#### 3-7. Power Sequence

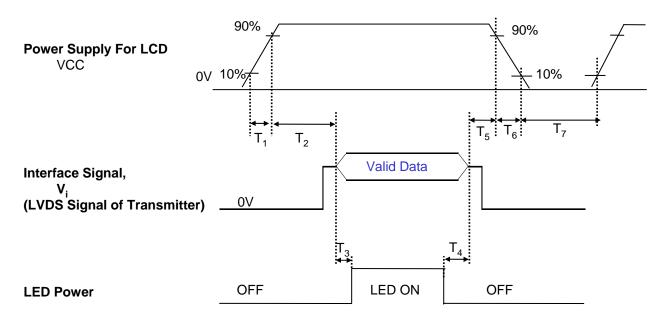

#### Table 7. POWER SEQUENCE TABLE

Parameter		Units		
	Min.	Тур.	Max.	
T <sub>1</sub>	0.5	-	10	(ms)
T <sub>2</sub>	0	-	50	(ms)
T <sub>3</sub>	200	-	-	(ms)
T <sub>4</sub>	200	-	-	(ms)
T <sub>5</sub>	0	-	50	(ms)
T <sub>6</sub>	3	-	10	(ms)
T <sub>7</sub>	400	-	-	(ms)

#### Note)

- 1. Valid Data is Data to meet "3-3. LVDS Signal Timing Specifications"
- 2. Please avoid floating state of interface signal at invalid period.
- 3. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
- 4. LED power must be turn on after power supply for LCD and interface signal are valid.
- 5. Discharging Time (Recommendation Condition : Satisfy T6. T7)

Parameter		Value	Units	
	Min.	Тур.	Max.	
Discharging Time	-	0	5	(sec)


12/28



## 4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\Theta$  equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

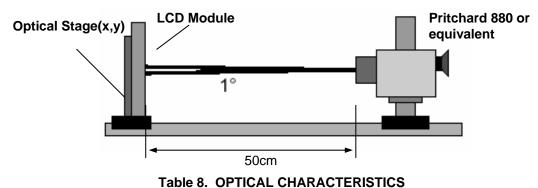

## FIG. 1 Optical Characteristic Measurement Equipment and Method

			a=250, vot	= 3.3  V, 1  V = 0  U	$12, 1_{CLK}$	$69.3101HZ, I_{BL} = 17 MA$
Parameter	Symbol		Values		Units	Notes
Falameter	Symbol	Min	Тур	Max	Units	NOLES
Contrast Ratio	CR		500	-		1
Surface Luminance, white	L <sub>WH</sub>		180		cd/m <sup>2</sup>	2
Luminance Variation	$\delta_{\text{WHITE}}$	-	1.4	1.6		3
Response Time	Tr <sub>R</sub> + Tr <sub>D</sub>	-	16	25	ms	4
Color Coordinates	[					
RED	RX	0.551	0.581	0.611	1	
	RY	0.315	0.345	0.375	[	
GREEN	GX	0.312	0.342	0.372	[	
	GY	0.537	0.567	0.597	[	
BLUE	BX	0.132	0.162	0.192	[	
	BY	0.096	0.126	0.156	[	
WHITE	WX	0.283	0.313	0.343	[	
	WY	0.299	0.329	0.359	[	
Viewing Angle						5
x axis, right(Φ=0°)	Θr	60	-	-	degree	
x axis, left ( $\Phi$ =180°)	Θl	60	-	-	degree	
y axis, up ( $\Phi$ =90°)	Θu	50		-	degree	
y axis, down ( $\Phi$ =270°)	Θd	50	-	-	degree	
Gray Scale			2.2			6

Ta=25°C, VCC=3.3V, fv=60Hz, f<sub>CLK</sub>= 69.3MHz, I<sub>BL</sub>= 17 mA



#### LP089WS1 Liquid Crystal Display

#### **Product Specification**

Note)

1. Contrast Ratio(CR) is defined mathematically as Surface Luminance with all white pixels

Contrast Ratio =

Surface Luminance with all black pixels

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

 $L_{WH} = Average(L_1, L_2, \dots, L_5)$ 

3. The variation in surface luminance , The panel total variation ( $\delta_{WHITE}$ ) is determined by measuring L<sub>N</sub> at each test position 1 through 13 and then defined as followed numerical formula. For more information see FIG 2.

 $\delta_{\text{WHITE}} = \frac{\text{Maximum}(L_1, L_2, \dots L_{13})}{\text{Minimum}(L_1, L_2, \dots L_{13})}$ 

- 4. Response time is the time required for the display to transition from white to black (rise time,  $Tr_R$ ) and from black to white(Decay Time,  $Tr_D$ ). For additional information see FIG 3.
- 5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6.	Gray	scale	specification
----	------	-------	---------------


\*  $f_{V} = 60Hz$ 

Gray Level	Luminance [%] (Typ)
LO	0.1
L7	2.4
L15	8.3
L23	16.4
L31	26.2
L39	40.8
L47	59.0
L55	79.6
L63	100.0




#### FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

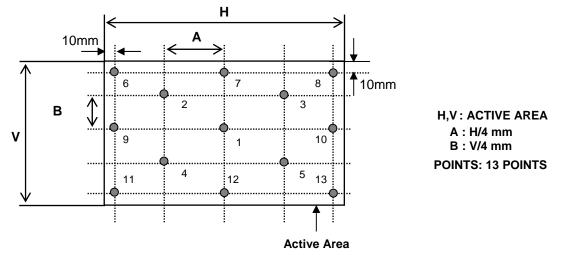


#### FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

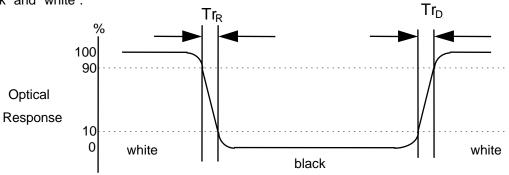



Ver. 1.0

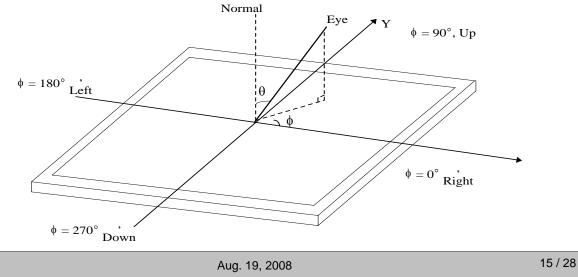




## **5. Mechanical Characteristics**

The contents provide general mechanical characteristics for the model LP089WS1. In addition the figures in the next page are detailed mechanical drawing of the LCD.

	Horizontal	$213.40\pm0.3~\text{mm}$		
Outline Dimension	Vertical	$129.55\pm0.3\text{ mm}$		
	Thickness	5.45mm (max)		
Bezel Area	Horizontal	198.37 mm		
Dezel Area	Vertical	116.70 mm		
Active Display Area	Horizontal	195.07 mm		
Active Display Area	Vertical	113.40 mm		
Weight	200g (Max.)			
Surface Treatment	Glare treatment of the front polarize	r		

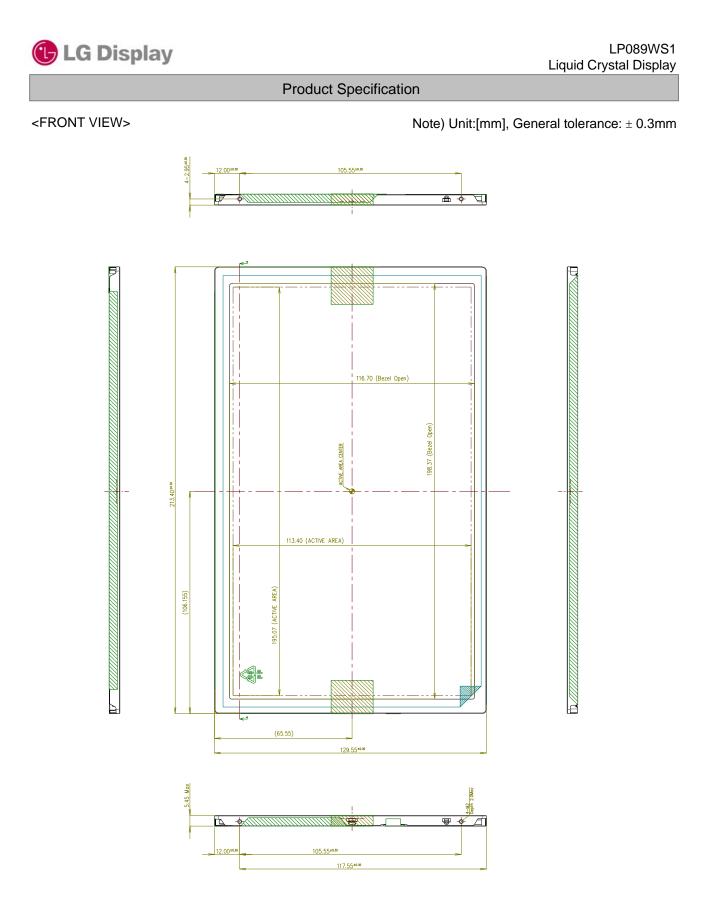


Aug. 19, 2008



#### <REAR VIEW>


#### Note) Unit:[mm], General tolerance: $\pm \ 0.3 \text{mm}$

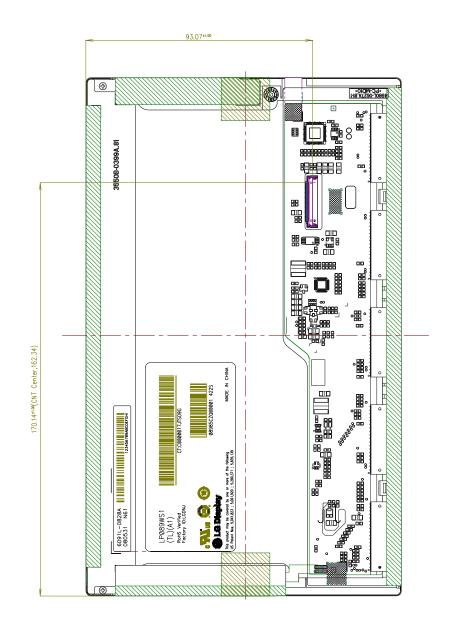



#### <REAR VIEW>


#### Note) Unit:[mm], General tolerance: ± 0.3mm

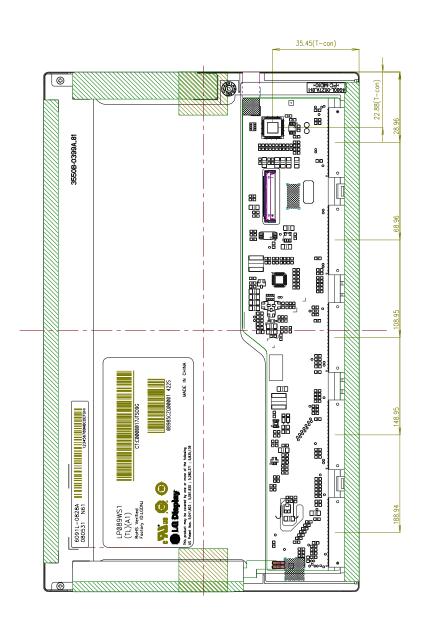

In order to avoid IC damage, it is not allowed to have such overlappings as cables or antennas, camera, WLAN, WWAN over these COF locations.



#### [ DETAIL DESCRIPTION OF SIDE MOUNTING SCREW ]

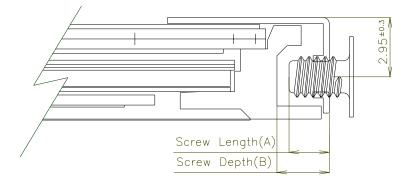

Section A-A

- \* Mounting Screw Length (A) = 1.7(Min) /2.0(Max)
- \* Mounting Screw Hole Depth (B) = 2.0(Min)
- \* Mounting hole location : 2.95(typ.)
- \* Torque : 2.0 kgf.cm(Max)
- (Measurement gauge : torque meter)

Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.




## 6. Reliability

Environment test condition


No.	Test Item	Conditions				
1	High temperature storage test	Ta= 60°C, 240h				
2	Low temperature storage test	Ta= -20°C, 240h				
3	High temperature operation test	Ta= 50°C, 50%RH, 240h				
4	Low temperature operation test	Ta= 0°C, 240h				
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis				
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)				
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr				
8	Image Sticking <sup>1)</sup>	Ta= 25°C, Pattern : Mosaic(8 by 6), Operating Time : 30 min Lamp Operating Current : 6.0mA				

#### { Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.







<Judgment Condition>

: Operating during 30 minutes with Mosaic Pattern(8 by 6), there is no Image Sticking after 10 second with half gray pattern.



## 7. International Standards

#### 7-1. Safety

a) UL 60950-1:2003, First Edition, Underwriters Laboratories, Inc., Standard for Safety of Information Technology Equipment.
b) CAN/CSA C22.2, No. 60950-1-03 1<sup>st</sup> Ed. April 1, 2003, Canadian Standards Association, Standard for Safety of Information Technology Equipment.
c) EN 60950-1:2001, First Edition, European Committee for Electrotechnical Standardization(CENELEC) European Standard for Safety of Information Technology Equipment.

## 7-2. EMC

a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHZ to 40GHz. "American National Standards Institute(ANSI), 1992

b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.

c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998 (Including A1: 2000)



## 8. Packing

## 8-1. Designation of Lot Mark

a) Lot Mark



A,B,C : SIZE(INCH)
E : MONTH

D : YEAR F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

#### 2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	А	В	С

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

#### 8-2. Packing Form

- a) Package quantity in one box : 40 pcs
- b) Box Size : 395mm × 390mm × 286mm



## 9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

## 9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental)
- to the polarizer.)(7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

## 9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  $V=\pm 200 mV$ (Over and under shoot voltage)
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.



## 9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

## 9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

## 9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.It is recommended that they be stored in the container in which they were shipped.

## 9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.

Please carefully peel off the protection film without rubbing it against the polarizer.

- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



## APPENDIX A. Enhanced Extended Display Identification Data (EEDID<sup>™</sup>) 1/3

	- 1					
		Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
		0	00	Header	00	00000000
		1	01	Header	FF	11111111
	-	2	02	Header	FF	11111111
1	-	3	03	Header	FF	11111111
Hauder	-	4	04	Header	FF	11111111
-	-	5	05	Header	FF	11111111
	-	6	06	Header	FF	11111111
		7	07	Header	00	00000000
		8	08	EISA manufacture code ( 3 Character ID ) LGD	30	00110000
		9	09	EISA manufacture code (Compressed ASCII)	<b>E4</b>	11100100
EDID		10	0A	Panel Supplier Reserved - Product Code 017Fh	<b>7</b> F	01111111
	-	11	<b>0B</b>	(Hex LSB first )	01	00000001
	、  -	12	0C	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
roduct		13	<b>0D</b>	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
Trans.	<u>-</u>	14	0E	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
A P		15	0F	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
-		16	10	Week of Manufacture 0 weeks	00	00000000
Vendor / Product Version		17	11	Year of Manufacture 2008years	12	00010010
Ver		18	12	EDID structure version # = 1	01	00000001
		19	13	EDID revision $\# = 3$	03	00000011
		20	14	Video input Definition = Digital signal	80	10000000
8		21	15	Max H image size (Rounded cm) = 19 cm	13	00010011
pla a		22	16	Max V image size (Rounded cm) = 11 cm	<b>0B</b>	00001011
Display		23	17	Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
	2	24	18	Feature Support (no_DPMS, no_Active Off/Very Low Power, RGB color display, Timing BLK 1,no_GTF)	<b>0A</b>	00001010
8		25	19	Red/Green Low Bits (RxRy/GxGy)	<b>D9</b>	11011001
Panel Color Coordinates		26	1A	Blue/White Low Bits (BxBy/WxWy)	95	10010101
di.		27	1B	Red X $Rx = 0.581$	94	10010100
Q		28	1C	Red Y Ry =0.345	58	01011000
ä		29	1D	Green X $Gx = 0.342$	57	01010111
- Q		30	1E	Green Y Gy =0.567	91	10010001
Ŭ	_	31	1F	Blue X $Bx = 0.162$	29	00101001
2	_	32	20	Blue Y By $= 0.126$	20	00100000
Ba	_	33	21	White X Wx=0.313	50	01010000
		34	22	White Y Wy = $0.329$	54	01010100
Iq To	₿	35	23	Established timing 1 (00h if not used)	00	00000000
Establ		36 37	24	Established timing 2 (00h if not used)	00	00000000
	+	37	25 26	Manufacturer's timings (00h if not used) Standard timing ID1 (01h if not used)	00	00000000 00000001
	-	38 39	20	Standard timing ID1 (01h if not used) Standard timing ID1 (01h if not used)	01	00000001
	-	40	27	Standard timing ID2 (01h if not used)	01	00000001
		40	29	Standard timing ID2 (01h if not used) Standard timing ID2 (01h if not used)	01	00000001
0	-	42	2.9 2A	Standard timing ID3 (01h if not used)	01	00000001
Standard Timing ID		43	2B	Standard timing ID3 (01h if not used)	01	00000001
ing	-	44	2C	Standard timing ID4 (01h if not used)	01	00000001
<b>1</b>		45	2D	Standard timing ID4 (01h if not used)	01	00000001
	-	46	2E	Standard timing ID5 (01h if not used)	01	00000001
tan 1		47	2F	Standard timing ID5 (01h if not used)	01	00000001
Jun		48	30	Standard timing ID6 (01h if not used)	01	00000001
Sit		49	31	Standard timing ID6 (01h if not used)	01	00000001
		50	32	Standard timing ID7 (01h if not used)	01	00000001
		51	33	Standard timing ID7 (01h if not used)	01	00000001
		52	34	Standard timing ID8 (01h if not used)	01	00000001
		53	35	Standard timing ID8 (01h if not used)	01	00000001



## APPENDIX A. Enhanced Extended Display Identification Data (EEDID<sup>™</sup>) 2/3

	Byte	Byte		Value	Value
	(Dec)	(Hex)	Field Name and Comments	(Hex)	(Bin)
	54	36	Pixel Clock/10,000 (LSB) 48.9 MHz @ 60Hz	<b>1A</b>	00011010
	55	37	Pixel Clock/10,000 (MSB)	13	00010011
	56	38	Horizontal Active (lower 8 bits) 1024 Pixels	00	00000000
	57	39	Horizontal Blanking(Thp-HA) (lower 8 bits) 280 Pixels	18	00011000
	58	3A	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	41	01000001
L	59	3B	Vertical Avtive 600 Lines	<b>58</b>	01011000
r#	60	3C	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 25 Lines	19	00011001
oto.	61	3D	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	20	00100000
ni	62	3E	Horizontal Sync. Offset (Thfp) 24 Pixels	18	00011000
S S	63	3F	Horizontal Sync Pulse Width (HSPW) 136 Pixels	88	10001000
Timing Descriptor #1	64	40	Vertical Sync Offset(Tvfp) : Sync Width (VSPW) 0 Lines : 22 Lines	03	00000011
iņ	65	41	Horizontal Vertical Sync Offset/Width (upper 2bits)	01	00000001
<u>m</u>	66	42	Horizontal Image Size (mm) 195 mm	<b>C3</b>	11000011
	67	43	Vertical Image Size (mm) 113 mm	71	01110001
	68	44	Horizontal Image Size / Vertical Image Size	00	00000000
	69	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	70	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	71	47	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_NEG), DE only note	18	00011000
	71	47	: LSB is set to 'l' if panel is DE-timing only. H/V can be ignored.	10	00011000
	72	48	Flag	00	00000000
	73	49	Flag	00	00000000
	74	<b>4</b> A	Flag	00	0000000
	75	<b>4B</b>	Data Type Tag (Descriptor Defined by manufacturer)	00	0000000
	76	4C	Flag	00	00000000
<b>F</b>	77	4D	Descriptor Defined by manufacturer	00	00000000
līming Descriptor #2	78	<b>4</b> E	Descriptor Defined by manufacturer	00	00000000
ipt	79	4F	Descriptor Defined by manufacturer	00	00000000
SC	80	50	Descriptor Defined by manufacturer	00	00000000
Ď	81	51	Descriptor Defined by manufacturer	00	00000000
ß	82	52	Descriptor Defined by manufacturer	00	00000000
nir.	83	53	Descriptor Defined by manufacturer	00	00000000
11	84	54	Descriptor Defined by manufacturer	00	00000000
	85	55	Descriptor Defined by manufacturer	00	00000000
	86	56	Descriptor Defined by manufacturer	00	00000000
	87	57	Descriptor Defined by manufacturer	00	00000000
	88	58	Descriptor Defined by manufacturer	00	00000000
	89	59	Descriptor Defined by manufacturer	00	00000000
	90	5A	Flag	00	00000000
	91	5B	Flag	00	00000000
	92	5C	Flag	00	00000000
	93	5D	Data Type Tag ( ASCII String )	FE	11111110
	94	5E	Flag	00	00000000
\$2	95	5F	ASCII String L	<b>4</b> C	01001100
₩.¥	96	60	ASCII String G	47	01000111
Timing Descriptor #3	97	61	ASCII String	20	00100000
, cu	98	62	ASCII String D	44	01000100
×	99	63	ASCII String i	69	01101001
8	100	64	ASCII String s	73	01110011
, i	101	65	ASCII String P	70	01110000
Tun I	102	66	ASCII String 1	6C	01101100
• • •	102	67	ASCII String a	61	01100001
	104	68	ASCII String y	79	01111001
	105	69	Manufacturer P/N(If<13 char> 0Ah, then terminate with ASC $\square$ code 0Ah, set remaining char = 20h)	<b>0</b> A	00001010
	105	6A	Manufacturer P/N(II<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h) Manufacturer P/N(II<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	20	00100000
	100	6B	Manufacturer P/N(II<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h) Manufacturer P/N(II<13 char-> 0Ah, then terminate with ASC II code 0Ah, set remaining char = 20h)	20	00100000
	107	<b>UD</b>	- And a second s	<b>20</b>	00100000



## APPENDIX A. Enhanced Extended Display Identification Data (EEDID<sup>™</sup>) 3/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
	108	6C	Flag	00	00000000
	109	6D	Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag (Monitor Name, stored as ASCII)	FE	11111110
	112	70	Flag	00	00000000
7	113	71	Monitor Name, stored as ASCII L	<b>4</b> C	01001100
Timing Descriptor #4	114	72	Monitor Name, stored as ASCII P	50	01010000
ipte	115	73	Monitor Name, stored as ASCII 0	30	00110000
SCT 2	116	74	Monitor Name, stored as ASCII 8	38	00111000
q	117	75	Monitor Name, stored as ASCII 9	39	00111001
20	118	76	Monitor Name, stored as ASCII W	57	01010111
, in	119	77	Monitor Name, stored as ASCII S	53	01010011
Lin	120	78	Monitor Name, stored as ASCII 1	31	00110001
	121	79	Monitor Name, stored as ASCII -	<b>2D</b>	00101101
	122	7A	Monitor Name, stored as ASCII T	54	01010100
	123	7B	Monitor Name, stored as ASCII L	<b>4</b> C	01001100
	124	7C	Monitor Name, stored as ASCII A	41	01000001
	125	7D	Monitor Name, stored as ASCII 1	31	00110001
Chec	126	7E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
G	127	<b>7</b> F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	<b>C0</b>	11000000