IS25C16



16K-BIT SPI SERIAL ELECTRICALLY ERASABLE PROM

Preliminary Information February 2009

FEATURES

- Serial Peripheral Interface (SPI) Compatible
 Supports SPI Modes 0 (0,0) and 3 (1,1)
- Wide-voltage Operation
 - Vcc = 1.8V to 5.5V
- Low power CMOS
 - Operating current less than 1 mA (1.8V)
 - Standby current less than 1 µA (1.8V)
- · Block Write Protection
 - Protect 1/4, 1/2, or Entire Array
- 16-byte page write mode
 - Partial page writes allowed
- 10 MHz Clock Rate (5V)
- Self timed write cycles (5 ms Typical)
- High-reliability
 - Endurance: 1 million cycles per byte
 - Data retention: 100 years
- Industrial and Automotive temperature ranges
- Packages: SOIC/SOP, TSSOP, DFN and CSP

DESCRIPTION

The IS25C16 is a 16Kbit (2048 x 8) electrically erasable PROM devices that use the Serial Peripheral Interface (SPI) for communications.


This EEPROM operates in a wide voltage range of 1.8V to 5.5V to be compatible with most application voltages. ISSI designed this device to be a practical, low-power SPI EEPROM solution. The device is offered in lead-free, RoHS, halogen free or Green. The available package types are 8-pin SOIC, TSSOP, DFN and CSP.

The functional features of the IS25C16 allow them to be among the most advanced serial non-volatile memories available. Each device has a Chip-Select (\overline{CS}) pin, and a 3-wire interface of Serial Data In (SI), Serial Data Out (SO), and Serial Clock (SCK). While the 3-wire interface of the IS25C16 provides for high-speed access, a \overline{HOLD} pin allows the memories to ignore the interface in a suspended state; later the \overline{HOLD} pin reactivates communication without re-initializing the serial sequence. A Status Register facilitates a flexible write protection mechanism, and a device-ready bit (\overline{RDY}) .


Copyright © 2008 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI products are not designed, intended, authorized or warranted for use as components in systems or equipment intended for critical medical or surgical equipment, aerospace systems, or for other applications planned to support or sustain life. It is the customer's obligation to optimize the design in their own products for the best performance and optimization on the functionality and etc. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and prior placing orders for products.



PIN CONFIGURATION 8-Pin DIP, SOIC, and TSSOP

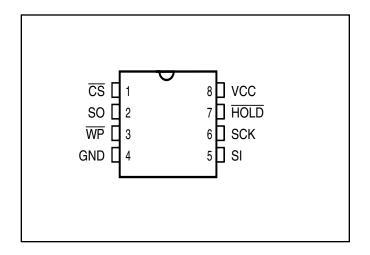

8-pad DFN



PIN DESCRIPTIONS

CS	Chip Select
SCK	Serial Data Clock
SI	Serial Data Input
SO	Serial Data Output
GND	Ground
Vcc	Power
WP	Write Protect
HOLD	Suspends Serial Input

Chip Select (\overline{CS}): The \overline{CS} pin activates the device. Upon power-up, \overline{CS} should follow Vcc. When the device is to be enabled for instruction input, the signal requires a High-to-Low transition. While \overline{CS} is stable Low, the master and slave will communicate via SCK, SI, and SO signals. Upon completion of communication, \overline{CS} must be driven High. At this moment, the slave device may start its internal write cycle. When \overline{CS} is high, the device enters a power-saving standby mode, unless an internal write operation is underway. During this mode, the SO pin becomes high impedance.

PIN DESCRIPTIONS

Serial Clock (SCK): This timing signal provides synchronization between the microcontroller and IS25C16. Op-Codes, byte addresses, and data are latched on SI with a rising edge of the SCK. Data on SO is refreshed on the falling edge of SCK for SPI modes (0,0) and (1,1).

Serial Data Input (SI): This is the input pin for all data that the IS25C16 is required to receive.

Serial Data Output (SO): This is the output pin for all data transmitted from the IS25C16.

Write Protect (WP): The purpose of this input signal is to initiate Hardware Write Protection mode. This mode prevents the Block Protection bits and the WPEN bit in the Status Register from being altered. To cause Hardware Write Protection, WP must be Low at the same time WPEN is 1. WP may be hardwired to Vcc or GND.

HOLD (HOLD): This input signal is used to suspend the device in the middle of a serial sequence and temporarily ignore further communication on the bus (SI, SO, SCK). Together with Chip Select, the HOLD signal allows multiple slaves to share the bus. The HOLD signal transitions must occur only when SCK is Low, and be held stable during SCK transitions. (See Figure 8 for Hold timing) To disable this feature, HOLD may be hardwired to Vcc.



SERIAL INTERFACE DESCRIPTION

MASTER: The device that provides a clock signal.


SLAVE: The IS25C16 is a slave because the clock signal is an input.

TRANSMITTER/RECEIVER: The IS25C16 has both data input (SI) and data output (SO).

MSB: The most significant bit. It is always the first bit transmitted or received.

OP-CODE: The first byte transmitted to the slave following CS transition to LOW. If the OP-CODE is a valid member of the IS25C16 instruction set (Table 3), then it is decoded appropriately. If the OP-CODE is not valid, and the SO pin remains in high impedance.

BLOCK DIAGRAM

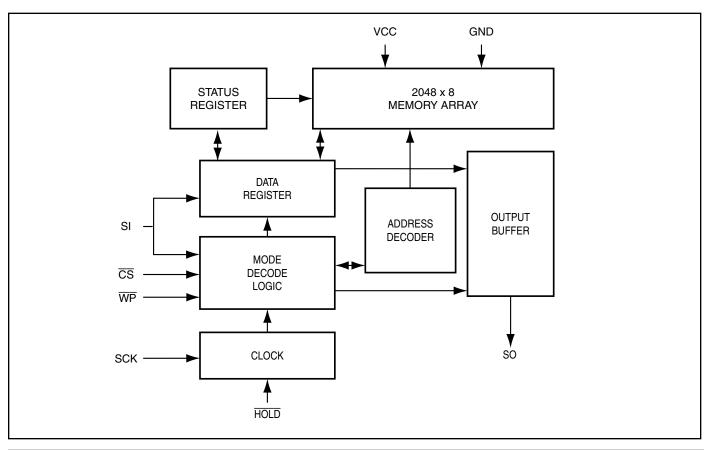



STATUS REGISTER

The status register contains 8-bits for write protection control and write status. (See Table 1). It is the only region of memory other than the main array that is accessible by the user.

Table 1. Status Register Format

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit1 Bit 0	
WPEN	Χ	Χ	Х	BP1	BP0	WEN RDY	

Notes:

- 1. X = Don't care bit.
- 2. During internal write cycles, bits 0 to 7 are temporarily 1's.

The Status Register is Read-Only if either: a) Hardware Write Protection is enabled or b) WEN is set to 0. If neither is true, it can be modified by a valid instruction.

Ready (\overline{RDY}), Bit 0: When $\overline{RDY} = 1$, it indicates that the device is busy with a write cycle. $\overline{RDY} = 0$ indicates that the device is ready for an instruction. If $\overline{RDY} = 1$, the only command that will be handled by the device is Read Status Register.

Write Enable (WEN), Bit 1: This bit represents the status of device write protection. If WEN = 0, the Status Register and the entire array is protected from modification, regardless of the setting of WPEN, WP pin, or block protection. The only way to set WEN to 1 is via the Write Enable command (WREN). WEN is reset to 0 upon power-up.

Block Protect (BP1, BP0), Bits 2-3: Together, these bits represent one of four block protection configurations implemented for the memory array. (See Table 2 for details.)

BP0 and BP1 are non-volatile cells similar to regular array cells, and factory programmed to 0. The block of memory defined by these bits is always protected, regardless of the setting of WPEN, $\overline{\text{WP}}$, or WEN.

Table 2. Block Protection

	Sta Regi Bi	ster	Array Addresses Protecto	ed
Level	BP1	BP0	IS25C16	
0	0	0	None	
1(1/4)	0	1	0600h -07FFh	
2(1/2)	1	0	0400h -07FFh	
3(All)	1	1	0000h -07FFh	

Don't Care, Bits 4-6: Each of these bits can receive either 0 or 1, but values will not be retained. When these bits are read from the register, they are always 1.

Write Protect Enable (WPEN), Bit 7: This bit can be used in conjunction with \overline{WP} pin to enable Hardware Write Protection, which causes the Status Register to be read-only. The memory array is not protected by this mode. Hardware Write Protection requires that $\overline{WP}=0$ and WPEN = 1; it is disabled otherwise. Note: WPEN cannot be changed from 1 to 0 if the \overline{WP} pin is already set to Low. (See Table 4 for data protection relationship)



DEVICE OPERATION

The operations of the IS25C16 are controlled by a set of instructions that are clocked-in serially SI pin. (See Table 3). To begin an instruction, the chip select (\overline{CS}) should be dropped Low. Subsequently, each Low-to-High transition of the clock (SK) will latch a stable value on the SI pin. After the 8-bit op-code, it may be appropriate to continue to input an address or data to SI, or to output data from SO. During data output, values appear on the falling edge of SK. All bits are transferred with MSB first. Upon the last bit of communication, but prior to any following Low-to-High transition of SK, \overline{CS} should be raised High to end the transaction. The device then would enter Standby Mode if no internal programming were underway.

Table 3. Instruction Set

10.010	OI IIIOti GOL	 			
Name	Op-code	Operation	Address	Data(SI)	Data (SO)
WREN	0000 X110	Set Write Enable Latch	-	-	-
WRDI	0000 X100	Reset Write Enable Latch	-	-	-
RDSR	0000 X101	Read Status Register	-	-	D7-D0,
WRSR	0000 X001	Write Status Register	-	D7-D0	-
READ	0000 X011	Read Data from Array	A15-A0	-	D7-D0,
WRITE	0000 X010	Write Data to Array	A15-A0	D7-D0,	-

- 1. X = Don't care bit. For consistency, it is best to use "0".
- 2. Some address bits are don't care. See Table 5.
- 3. If the bits clocked-in for an op-code are invalid, SO remains high impedance, and upon CS going High there is no affect. A valid op-code with an invalid number of bits clocked-in for address or data will cause an attempt to modify the array or Status Register to be ignored.

WRITE ENABLE (WREN)

When Vcc is initially applied, the device powers up with both status register and entire array in a write-disabled state. Upon completion of Write Disable (WRDI), Write Status Register (WRSR), or Write Data to Array (WRITE), the device resets the WEN bit in the Status Register to 0. Prior to any data modification, a WREN instruction is necessary to set WEN to 1. (See Figure 2 for timing).

WRITE DISABLE (WRDI)

The device can be completely protected from modification by resetting WEN to 0 through the WRDI instruction. (See Figure 3 for timing).

READ STATUS REGISTER (RDSR)

The Read Status instruction tells the user the status of Write Protect Enable, the Block Protection setting (see Table 2), the Write Enable state, and the \overline{RDY} status. RDSR is the only instruction accepted when a write cycle is underway. It is recommended that the status of Write Enable and \overline{RDY} be checked, especially prior to an attempted modification of data. The 8 bits of the Status Register can be repeatedly output on SO after the initial Op-code. (See Figure 4 for timing).



WRITE STATUS REGISTER (WRSR)

This instruction lets the user choose a Block Protection setting, and set or reset the WPEN bit. The values of the other data bits incorporated into WRSR can be 0 or 1, and are not stored in the Status Register. WRSR will be ignored unless both the following are true: a) WEN = 1, due to a prior WREN instruction; and b) Hardware Write Protection is not enabled. (See Table 4 for details). Except for the $\overline{\text{RDY}}$ status, the values in the Status Register remain unchanged until the moment when the write cycle is complete and the register is updated. Note: WPEN can be changed from 1 to 0 only if $\overline{\text{WP}}$ is already set High. Once completed, WEN is reset for complete chip write protection. (See Figure 5 for timing).

READ DATA (READ)

This instruction begins with the op-code and the 16-bit address, and causes the selected data byte to be shifted out on SO. Following this first data byte, additional sequential bytes are output. If the data byte in the highest address is output, the address rolls-over to the lowest address in the array, and the output could loop indefinitely. At any time, a rising $\overline{\text{CS}}$ signal completes the operation. (See Figure 6 for timing).

WRITE DATA (WRITE)

The WRITE instruction begins with the op-code, the 16-bit address of the first byte to be modified, and the first data byte. Additional data bytes may be written sequentially to the array after the first byte. Each WRITE instruction can affect the contents of a 16 byte page, but no more. The page begins at address XXXXXXXX XXXX0000, and ends with XXXXXXXX XXXX1111. If the last byte of the page is input, the address rolls over to the beginning of the same page. More than 16 data bytes can be input during the same instruction, but upon a completed write cycle, a page would only contain the last 16 bytes.

The region of the array defined within Block Protection cannot be modified as long as that block configuration is selected. The region of the array outside the Block Protection can only be modified if Write Enable (WEN) is set to 1. Therefore, it may be necessary that a WREN instruction occur prior to WRITE. Hardware Write Protection has no affect on the memory array. Once Write is completed, WEN is reset for complete chip write protection. (See Figure 7 for timing).

Table 5. Address Key

Name	IS25C16	
A_N	$A_{10}A_{0}$	
Don't Care Bits	A ₁₅₋ A ₁₁	

Table 4. Write Protection

WPEN	WP	Hardware Write Protection	WEN	Inside Block	Outside Block	Status Register (WPEN, BP1, BP0)
0	Χ	Not Enabled	0	Read-only	Read-only	Read-only
0	Х	Not Enabled	1	Read-only	Unprotected	Unprotected
1	0	Enabled	0	Read-only	Read-only	Read-only
1	0	Enabled	1	Read-only	Unprotected	Read-only
Χ	1	Not Enabled	0	Read-only	Read-only	Read-only
X	1	Not Enabled	1	Read-only	Unprotected	Unprotected

Note: X = Don't care bit.



ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Parameter	Value	Unit
Vs	Supply Voltage	-0.5 to + 6.5	V
VP	Voltage on Any Pin	-0.5 to Vcc + 0.5	V
TBIAS	Temperature Under Bias	-55 to +125	°C
Тѕтс	Storage Temperature	-65 to +150	°C
Іоит	Output Current	5	mA

Notes:

Stress greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

OPERATING RANGE (IS25C16-2)

Range	Ambient Temperature	Vcc	
Industrial	−40°C to +85°C	1.8V to 5.5V	

Note: ISSI offers Industrial grade for Commercial applications (0°C to +70°C).

OPERATING RANGE (IS25C16-3)

Range	Ambient Temperature	Vcc
Automotive	-40°C to +125°C	2.5V to 5.5V

CAPACITANCE(1,2)

Symbol	Parameter	Conditions	Max.	Unit	
Cin	Input Capacitance	VIN = 0V	6	pF	
Соит	Output Capacitance	Vout = 0V	8	pF	

Notes:

- Tested initially and after any design or process changes that may affect these parameters and not 100% tested.
- 2. Test conditions: $TA = 25^{\circ}C$, f = 1 MHz, Vcc = 5.0V.



DC ELECTRICAL CHARACTERISTICS

 $TA = -40^{\circ}C$ to $+85^{\circ}C$ for Industrial, $TA = -40^{\circ}C$ to $+125^{\circ}C$ for Automotive.

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
Vol1	Output LOW Voltage	Vcc = 5V, lo _L = 2 mA	_	0.4	V
Vol2	Output LOW Voltage	Vcc = 2.5V, lo _L = 1.5 mA	_	0.4	V
Vol3	Output LOW Voltage	Vcc = 1.8V, loL = 0.15 mA	_	0.2	V
VoH1	Output HIGH Voltage	Vcc = 5V, Iон = -2 mA	0.8 x V cc	_	V
V _{OH2}	Output HIGH Voltage	Vcc = 2.5V, Iон = -0.4mA	0.8 x V cc	_	V
Voн3	Output HIGH Voltage	Vcc = 1.8V, Iон = -0.1mA	0.8 x V cc	_	V
VIH	Input HIGH Voltage		0.7x Vcc	Vcc + 1	V
VIL	Input LOW Voltage		-0.3	0.3 x Vcc	V
lu	Input Leakage Current	Vin = 0V to Vcc	-2	2	μA
ILO	Output Leakage Current	Vout = $0V$ to Vcc , $\overline{CS} = Vcc$	-2	2	μA

POWER SUPPLY CHARACTERISTICS - Industrial

 $T_A = -40^{\circ}C \text{ to } +85^{\circ}C$

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
Icc1	Operating Current	Read/Write at 10 MHz (Vcc = 5V)	_	5.0	mA
Icc2	Operating Current	Read/Write at 5 MHz (Vcc = 2.5V)	_	3.0	mA
lcc3	Operating Current	Read/Write at 2 MHz (Vcc = 1.8V)	_	1.0	mA
ISB1	Standby Current	Vcc = 5.0V, $Vin = Vcc$ or $GND\overline{CS} = Vcc$	_	3.0	μΑ
IsB2	Standby Current	$\frac{\text{Vcc}}{\text{CS}} = 2.5\text{V}, \text{Vin} = \text{Vcc or GND}$	_	2.0	μΑ
IsB3	Standby Current	$Vcc = 1.8V$, $Vin = Vcc$ or GND $\overline{CS} = Vcc$	_	1.0	μΑ

POWER SUPPLY CHARACTERISTICS - Automotive

 $T_A = -40^{\circ}C \text{ to } +125^{\circ}C$

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
Icc1	Operating Current	Read/Write at 5 MHz (Vcc = 5V)	_	4.0	mA
Icc2	Operating Current	Read/Write at 5 MHz (Vcc = 2.5V)	_	3.0	mA
ISB1	Standby Current	$\frac{\text{Vcc}}{\text{CS}} = 5.0 \text{V}, \text{Vin} = \text{Vcc or GND}$	_	8.0	μΑ
ISB2	Standby Current	$Vcc = 2.5V$, $Vin = Vcc$ or GND $\overline{CS} = Vcc$	_	5.0	μΑ



AC Characteristics - Industrial

 $TA = -40^{\circ}C$ to $+85^{\circ}C$ Supply voltage = 1.8V to 5.5V

		1.8V ≤ Vo			cc < 4.5V		/cc ≤ 5.5V	
Symbol	Parameter	Min	Max	Min	Max	Min	Max	Units
fsck	SCK Clock Frequency	0	2	0	5	0	10	MHz
trı	Input Rise Time	_	2		2	_	2	μs
tFI	Input Fall Time	_	2	_	2	_	2	μs
twn	SCK High Time	200	_	90	_	40	_	ns
twL	SCK Low Time	200		90		40	_	ns
tcs	CS High Time	200		100	_	40	_	ns
tcss	CS Setup Time	200		90		40	_	ns
tсsн	CS Hold Time	200	_	90	_	25	_	ns
tsu	Data In Setup Time	40	_	20	_	15	_	ns
tн	Data In Hold Time	50		30	_	15	_	ns
thd	Hold Setup Time	100		50		25	_	ns
tcD	Hold Hold Time	100		50		25	_	ns
tv	Output Valid	0	150	0	60	0	25	ns
tно	Output Hold Time	0	_	0	_	0	_	ns
tız	Hold to Output Low Z	0	100	0	50	0	25	ns
tHZ	Hold to Output High Z	_	250	_	100	_	25	ns
tois	Output Disable Time	_	250	_	100	_	25	ns
twc	Write Cycle Time		10	_	5	_	5	ms

Notes:

 $C_L = 100pF$



AC Characteristics - Automotive

 $TA = -40^{\circ}C$ to $+125^{\circ}C$. Supply voltage = 2.5V to 5.5V

		2.5 V ≤	Vcc < 4.5V		4.5V ≤ V	cc ≤ 5.5V
Symbol	Parameter	Min	Max	Min	Max	Units
fsck	SCK Clock Frequency	0	5	0	10	MHz
trı	Input Rise Time	_	2	_	2	μs
trı	Input Fall Time	_	2	_	2	μs
twн	SCK High Time	90	_	40	_	ns
twL	SCK Low Time	90	_	40	_	ns
tcs	CS High Time	100	_	40	_	ns
tcss	CS Setup Time	90	_	40	_	ns
tcsн	CS Hold Time	90	_	25	_	ns
tsu	Data In Setup Time	20	_	15	_	ns
tн	Data In Hold Time	30	_	15	_	ns
thd	Hold Setup Time	50	_	25	_	ns
tcD	Hold Hold Time	50	_	25	_	ns
tv	Output Valid	0	60	0	25	ns
tно	Output Hold Time	0	_	0	_	ns
tLZ	Hold to Output Low Z	0	50	0	25	ns
tHZ	Hold to Output High Z	_	100	_	25	ns
tois	Output Disable Time	_	100	_	25	ns
twc	Write Cycle Time	_	5	_	5	ms

Notes:

 $C_L = 100pF$



TIMING DIAGRAMS

Figure 1. Synchronous Data Timing

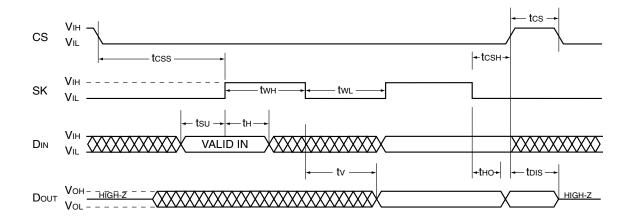


Figure 2. WREN Timing

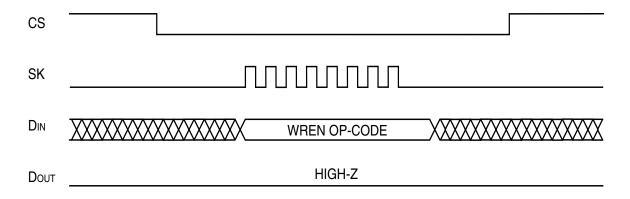


Figure 3. WRDI Timing

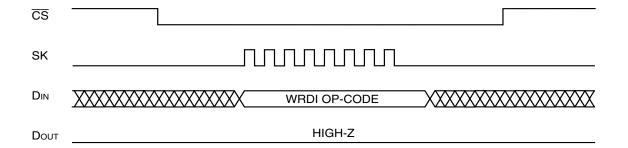




Figure 4. RDSR Timing

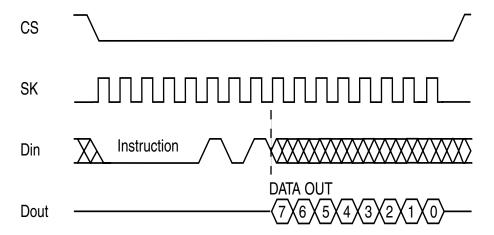


Figure 5. WRSR Timing

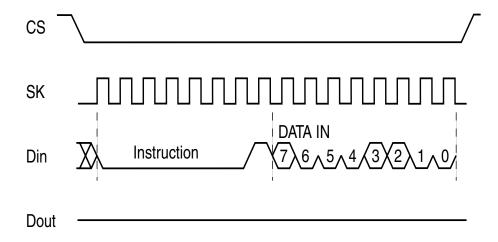


Figure 6. READ Timing

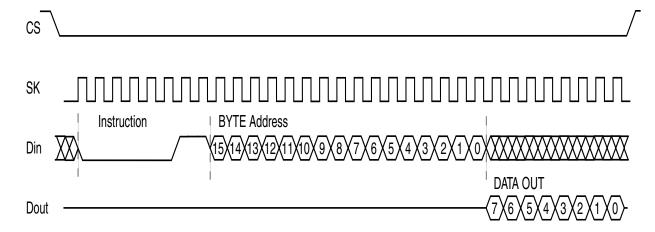




Figure 7. WRITE Timing


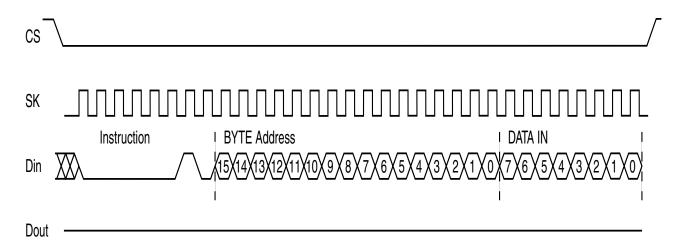


Figure 8. HOLD Timing



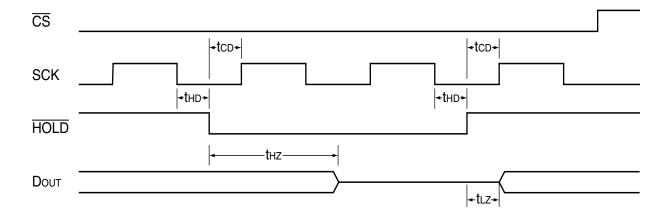

ORDERING INFORMATION

Industrial Range: -40°C to +85°C, Lead-free

Voltage Range	Part Number	Package* (8-pin)
1.8V	IS25C16-2GLI	150-mil SOIC (JEDEC)
to 5.5V	IS25C16-2ZLI	3 x 4.4 mm TSSOP
	IS25C16-2DLI-TR	2 x 3 mm DFN
	IS25C16-2CLI*	CSP

Automotive Range: -40°C to +125°C, Lead-free

Voltage Range	Part Number	Package	
2.5V	IS25C16-3GLA3	150-mil SOIC (JEDEC)	
to 5.5V	IS25C16-3ZLA3	3 x 4.4 mm TSSOP	


^{1.} Contact ISSI Sales Representatives for availability and other package information.

^{2.} Most listed part numbers are packed in tube, except DFN in tape and reel "-TR".

^{3.} For tape and reel, add "-TR" at the end of the P/N (4K per reel). DFN is 5K per reel.


^{4.} Refer to ISSI website for related declaration document on lead free, RoHS, halogen free, or Green, whichever is applicable. 5. ISSI offers Industrial grade for Commercial applications (0°C to +70°C).




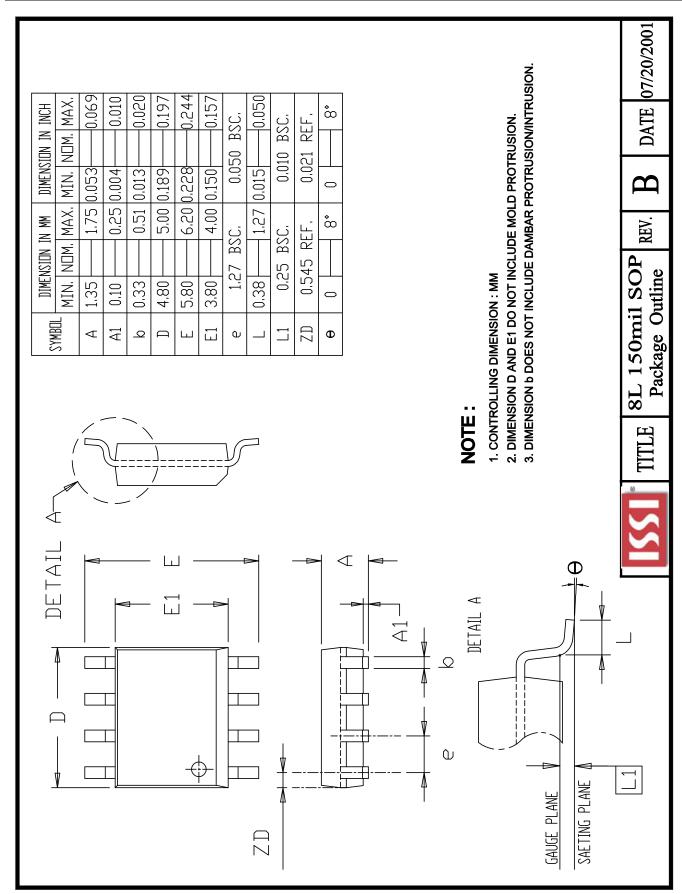





Thin Shrink Small Outline TSSOP Package Code: Z (8 pin, 14 pin)










		TSSOF	P (Z)		
Ref. Std.	,	JEDEC I	MO-153		
No. Leads	3	8			
	Millim	eters	Inch	nes	
Symbol	Min	Max	Min	Max	
Α	_	1.20	_	0.047	
A1	0.05	0.15	0.002	0.006	
A2	0.80	1.05	0.032	0.041	
В	0.19	0.30	0.007	0.012	
С	0.09	0.20	0.004	800.0	
D	2.90	3.10	0.114	0.122	
E1	4.30	4.50	0.169	0.177	
Е	6.40	BSC	0.25	2 BSC	
е	0.65	5 BSC	0.02	6 BSC	
L	0.45	0.75	0.018	0.030	
α	_	8°		8°	

		TSSOF	P (Z)	
Ref. Std.		JEDEC	MO-153	
No. Leads	3	14	4	
	Millim	eters	Inch	es
Symbol	Min	Max	Min	Max
Α	_	1.20	_	0.047
A1	0.05	0.15	0.002	0.006
A2	0.80	1.05	0.031	0.041
В	0.19	0.30	0.007	0.012
С	0.09	0.20	0.0035	0.008
D	4.90	5.10	0.193	0.201
E1	4.30	4.50	0.170	0.177
Е	6.40	BSC	0.25	2 BSC
е	0.65	BSC	0.02	6 BSC
L	0.45	0.75	0.0177	0.0295
α	_	8°	_	8°

SSI reserves the right to make changes to its products at any time without notice in order to improve design and supply the best possible product. We assume no responsibility for any errors which may appear in this publication. ©Copyright 2002, Integrated Silicon Solution, Inc.



Dual Flat No-Lead Package Code: D (8-pad)

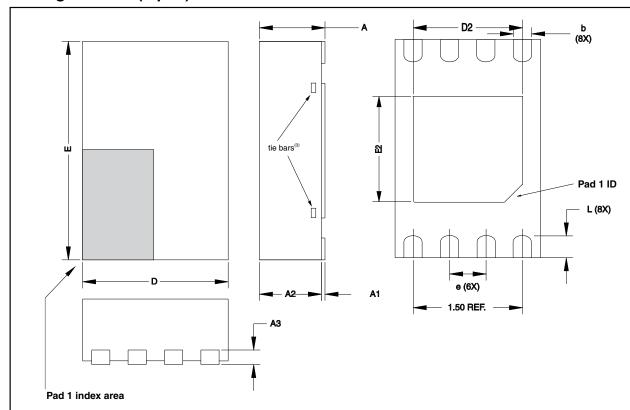

DFN

MILLIMETERS

Sym.	Min.	Nom	May	
Syiii.	141111.	NOIII.	IVIAA.	
N0.				
Pad		8		
D	2	.00 BS	C	
E	3	.00 BS	С	
D2	1.50	_	1.75	
E2	1.60	_	1.90	
Α	0.70	0.75	0.80	
A1	0.0	0.02	0.05	
A2	_	_	0.75	
A3	C).20 RE	F	
L	0.30	0.40	0.50	
е	0	.50 BS	С	
b	0.18	0.25	0.30	

Notes:

- 1. Refer to JEDEC Drawing MO-229.
- This is the metallized terminal and is measured between 0.18 mm and 0.30 mm from the terminal tip. The terminal may have a straight end instead of rounded.
- Package may have exposed tie bars, ending flush with package edge.



CSP (i) - Structure of Solder Bump

