


STRIPLINE FLANGE TERMINATIONS

PART NUMBER	FREQUENCY RANGE (GHz)	VSWR (MAX.)				
		DC-2	1-4	4-8	8-12	12-18
RFT502-1	DC to 2	1.10	---	---	---	---
RFT504-1	DC to 4	1.10	1.10	---	---	---
RFT508-1	DC to 8	1.10	1.10	1.15	---	---
RFT512-1	DC to 12	1.10	1.10	1.15	1.25	---
RFT518-1	DC to 18	1.10	1.10	1.15	1.25	1.30


20 WATTS

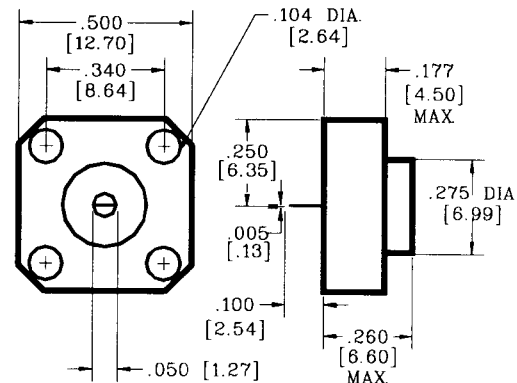

D


PART NUMBER	FREQUENCY RANGE (GHz)	VSWR (MAX.)			
		DC-2	2-4	4-8	8-18
RFT502-2	DC to 2	1.10	---	---	---
RFT504-2	DC to 4	1.10	1.15	---	---
RFT508-2	DC to 8	1.10	1.15	1.20	---
RFT518-2	DC to 18	1.10	1.15	1.20	1.30

20 WATTS

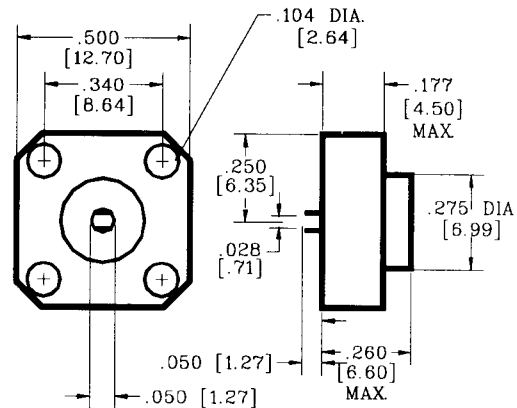

PART NUMBER	FREQUENCY RANGE (GHz)	VSWR (MAX.)			
		DC-2	2-4	4-8	8-18
RFT1002-10	DC to 2	1.10	---	---	---
RFT1004-10	DC to 4	1.10	1.15	---	---
RFT1008-10	DC to 8	1.10	1.15	1.20	---
RFT1018-10	DC to 18	1.10	1.15	1.20	1.35

10 WATTS

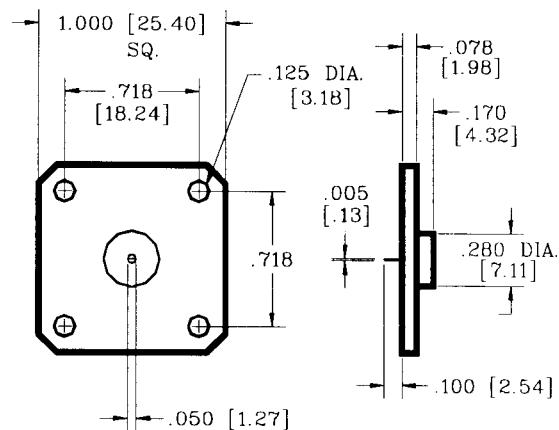

RES-NET MICROWAVE

12449 ENTERPRISE BOULEVARD • LARGO, FLORIDA 33773
PHONE (800) 525-0704 • (813) 530-9555 • FAX (813) 531-1592
E-MAIL ADDRESS: RES-NET@MSN.COM



ELECTRO TECHNIK